



9430-5061 Compressor Delay Timer Kit

This kit is intended for installation on any 115V Coleman-Mach roof top air conditioner with any 9000 series free delivery ceiling assembly. It will delay the compressor start-up when the thermostat calls for cooling and is adjustable from 15 to 240 seconds delay in order to stagger the compressor start-up of multiple units on the same power source.

Installation Instructions (refer to Figure 1)

1. Insure that all electrical supply current is disabled.
2. If unit is already installed and wired, unfasten and lower the ceiling assembly and disconnect the 9-pin unit plug from the ceiling assembly.
3. Remove the lid from the timer box and set the delay interval on the timer kit relay. It is suggested to use 15 seconds on one unit with additional units staggered at even increments between 15 and 240 seconds. Replace the timer box lid.
4. Attach the timer box to the top of the ceiling assembly chute with the two strips of double-sided tape included on the timer box. See Figure 1.
5. Attach unit cable to plug on timer box and attach cable from timer box to plug on ceiling assembly. See Figure 1.
6. If unit was previously installed, re-assemble ceiling assembly. If this is a new installation, all other assembly steps will be as described in the unit installation instructions.

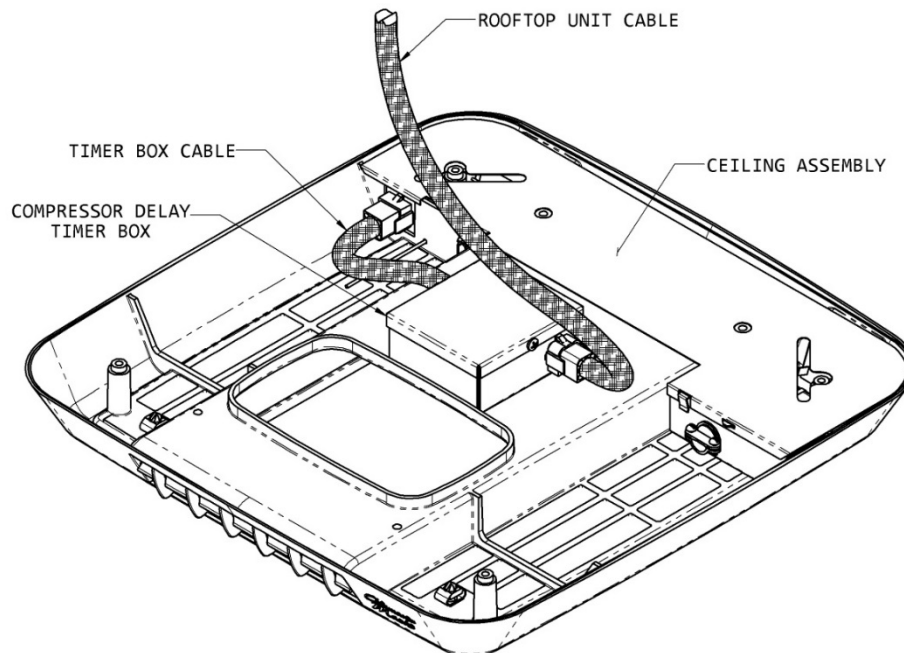


Figure 1

Airxcel, Inc.
RV Products Division
P.O. Box 4020
Wichita, KS 67204



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.