


Andersen “No-Sway” Weight Distribution Hitch FITMENT GUIDE

To figure out which Andersen Weight Distribution Hitch will work for your setup, you need to determine the following 4 options: Shank Size, Ball Size, Rack Drop/Rise, and Bracket Size.

SHANK SIZE

To determine your shank size, measure the **INSIDE** of your hitch receiver. This measurement should be the same top to bottom OR side to side.



BALL SIZE

The necessary ball size should be printed or stamped on top of your trailer coupler.

Andersen offers two ball sizes for our WD Hitch Kits:

2" Ball – 10,000 lbs GTWR, 1,000 lbs max tongue • **2-5/16" Ball** – 14,000 lbs GTWR, 1,400 lbs max tongue
2-5/16" Ball with a 2-1/2" or 3" Shank - 16,000 lbs GTWR

NOTE: For sway control to work well, you will need at least 350 lbs minimum tongue weight.

RACK DROP/RISE LENGTH

To determine if you need a 4" or 8" drop/rise, please do the following:


- A** With your trailer level, measure from the ground to the bottom of the trailer coupler.
- B** Now measure from the ground to the **INSIDE** of the top of your receiver tube — see illustration below.

The **difference** between the first and second measurements will tell you what size drop you will need (below).

- If the difference is **5" or less**, then the 4" drop will work for your set up* (in drop or rise position)
- If the difference is **between 5" and 9"**, then the 8" drop will work for your set up* (in drop or rise position)

NOTE: Subtract an extra 1/2" from the measured **difference** if your trailer tongue load is greater than 600 lbs.
These numbers are general guidelines and may not be accurate in all circumstances.

*** IMPORTANT:** The 8" drop does not have as many increments in the 0"–4" area as the 4" drop does. It's usefulness is mainly in the 4"–8" area (see 4" & 8" rack dimensions on page 4).

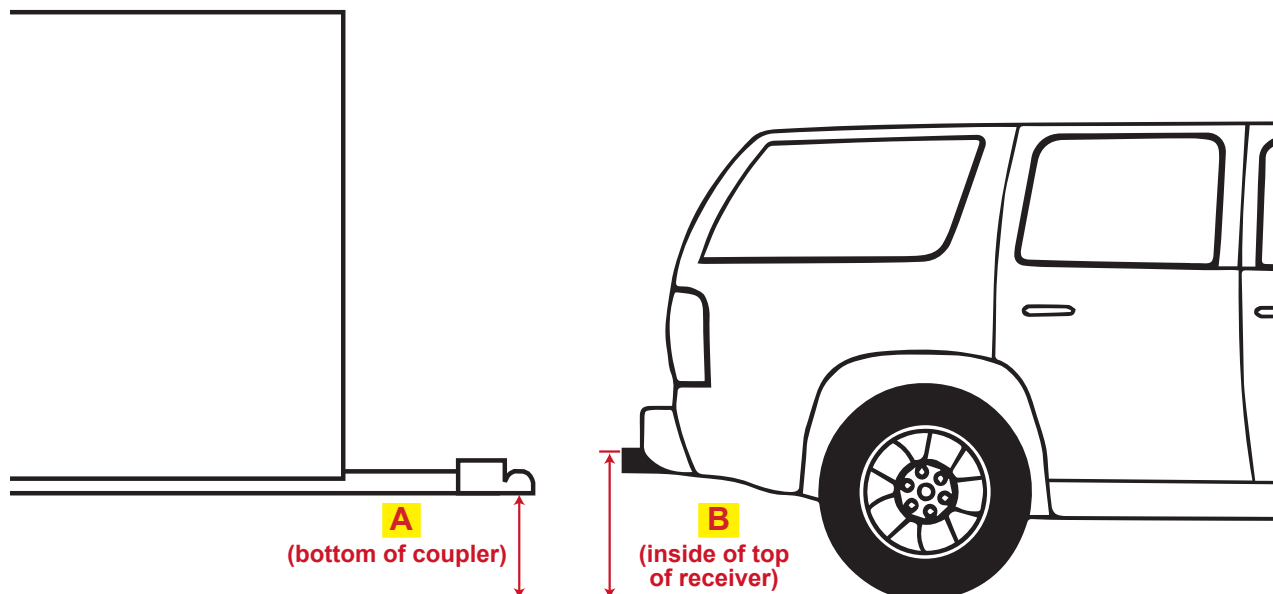

BRACKET SIZE

Andersen offers four bracket sizes for our WD Hitch Kits:

3", 4", 5", 6" Bracket

3", 4", 5", 6" Raised Bracket

3", 4", 5", 6" Extended Bracket*

4-3/8" Bracket

7", 8" Bracket


NOTE: If your trailer frame is slightly 'off' from standard sizing, you may need to choose the closest bracket size that is slightly **BIGGER** than your frame size and use a shim to fill the gap.

There are two measurements that will help determine which bracket to choose:

A Measure the vertical width of the trailer frame at the front of the trailer.

If it's 4-3/8" or 7"/8", that is the bracket you need. You are done.

If it is 3", 4", 5" or 6" then go to step **B** below.

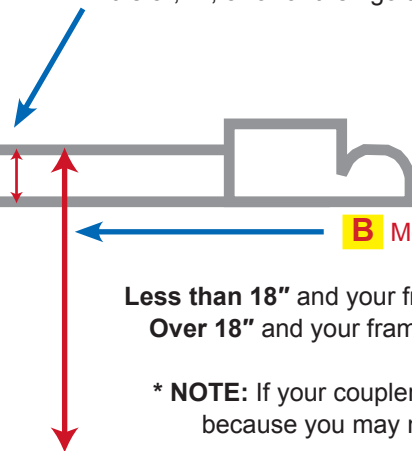

B Measure the height from the ground to the **TOP** of the trailer frame...

Less than 18" and your frame size is 3", 4", 5" or 6" – you may need raised brackets.

Over 18" and your frame size is 3", 4", 5" or 6" – use the **3", 4", 5", 6" brackets**.

*** NOTE:** If your coupler is positioned *below* the frame, contact Andersen Hitches because you may need a custom kit with "extended universal" brackets.



Keep track of your needed options here:

Shank Size

Ball Size

Drop/Rise

Bracket Size

Once you have your shank size, ball size, drop/rise, and bracket size, you can check Page 3 to see if one of our standard weight distribution hitch kits fits your setup.

If you have any questions or concerns, please feel free to email us at:

customerservice@anderseninc.com

or call us at **(208) 523-6460**

AVAILABLE ANDERSEN WEIGHT DISTRIBUTION HITCHES

4" Drop/Rise WD Hitch Kits

Part #	Shank Size	Ball Size	Drop/Rise	Brackets
3324	2"	2"	4"	3", 4", 5", 6"
3343	2"	2"	4"	4-3/8"
3344	2"	2-5/16"	4"	4-3/8"
3350	2"	2-5/16"	4"	3", 4", 5", 6"
3385	2"	2-5/16"	4"	7", 8"
3394	2-1/2"	2-5/16"	4"	3", 4", 5", 6"
3394-3	3"	2-5/16"	4"	3", 4", 5", 6"

8" Drop/Rise WD Hitch Kits


Part #	Shank Size	Ball Size	Drop/Rise	Brackets
3326	2"	2"	8"	3", 4", 5", 6"
3347	2"	2"	8"	4-3/8"
3348	2"	2-5/16"	8"	4-3/8"
3380	2"	2-5/16"	8"	3", 4", 5", 6"
3386	2"	2-5/16"	8"	7", 8"
3398	2-1/2"	2-5/16"	8"	3", 4", 5", 6"
3398-3	3"	2-5/16"	8"	3", 4", 5", 6"

If your setup is not covered by one of our standard Weight Distribution Hitches, we may be able to put together the exact kit you need. (Custom fees may apply).

Visit your local authorized Andersen Dealer or contact us directly at customerservice@anderseninc.com or (208) 523-6460 to learn more.


4" WD Rack, ball heights in drop and rise position (2" shank)

The distance between the highest setting in drop position and the lowest setting in the rise position is 1-7/8" (shown below in blue).

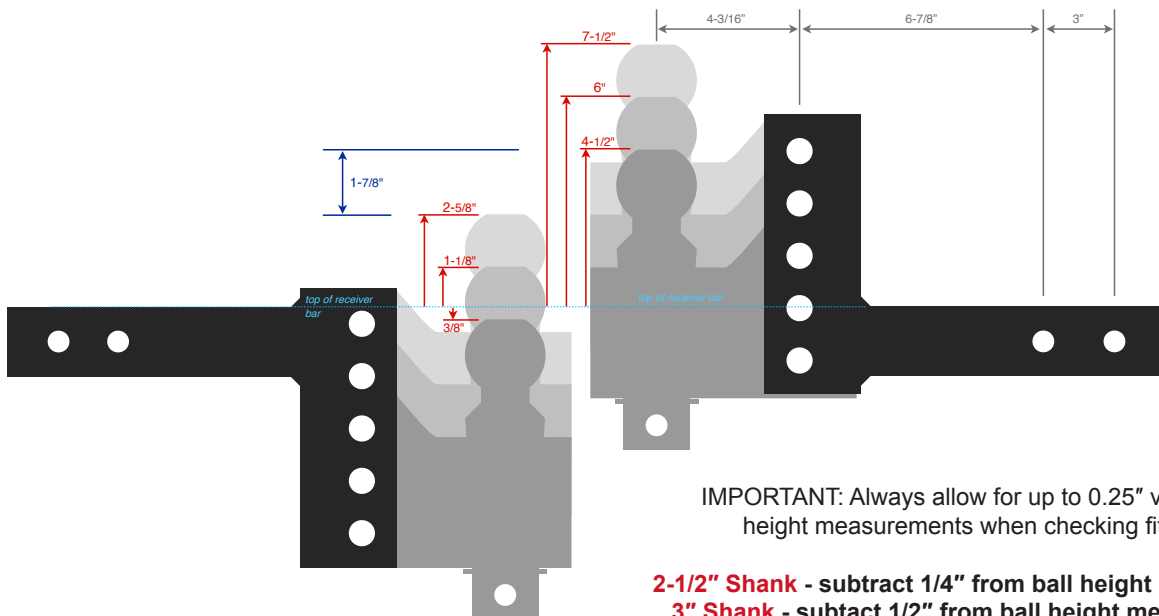

8" WD Rack, ball heights in drop and rise position (2" shank)

The distance between the highest setting in drop position and the lowest setting in the rise position is 3-7/8" (shown below in blue).

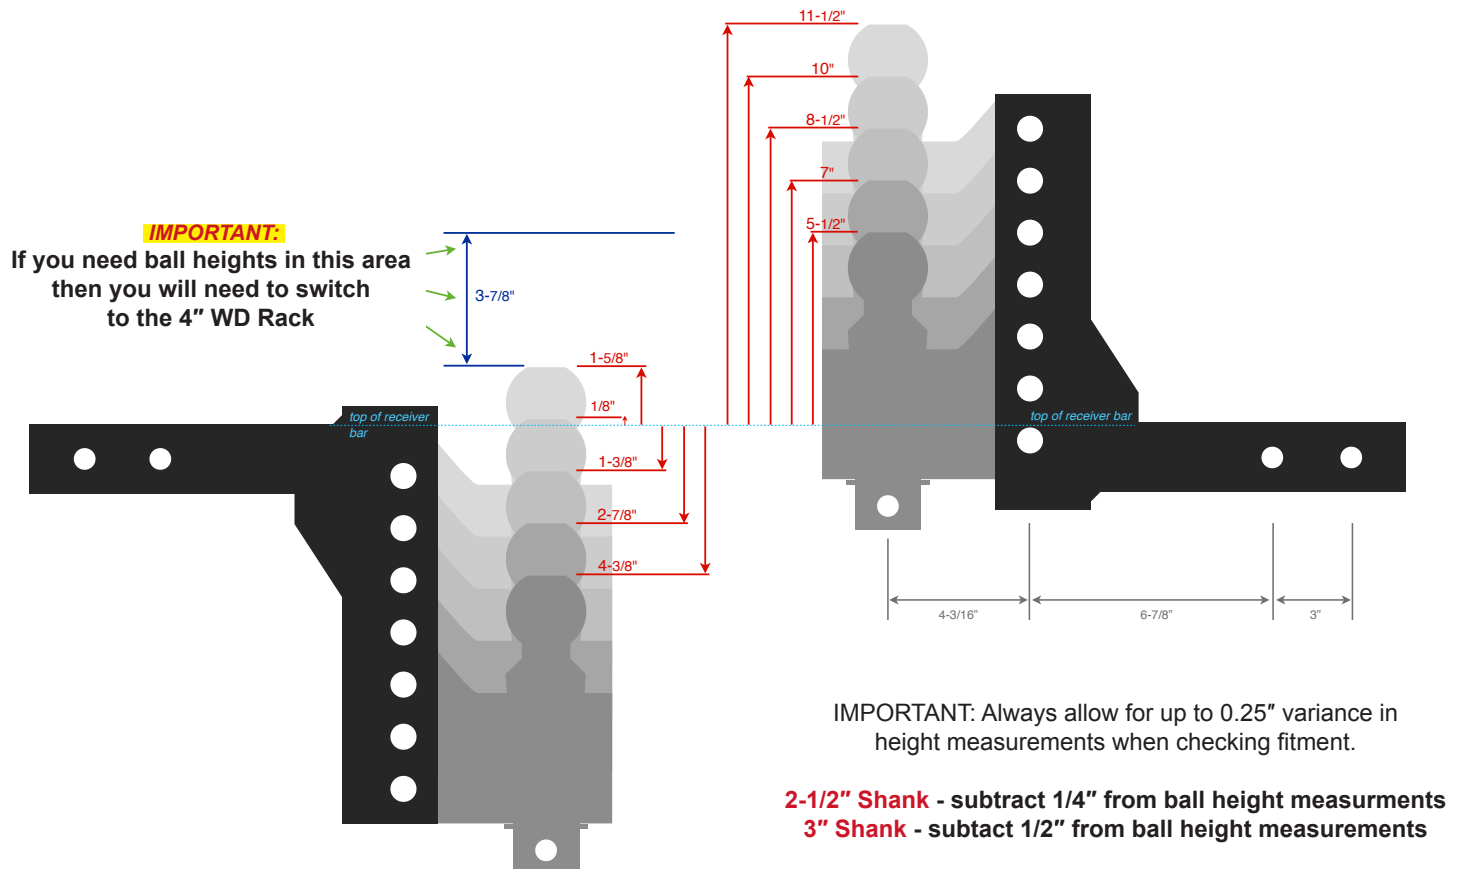



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.