

FIVBDP10A

1000W Deck Mount Inverter



Main Features



COMPATIBLE
WITH APPLIANCES
UNDER 1000W



HIGH
SURGE POWER



CONTINUOUS
OUTPUT



HIGH QUALITY
PURE SINE WAVE




LED INDICATOR
WITH ALL
OPERATIONS STATUS



EASY
INSTALLATION

FURRION

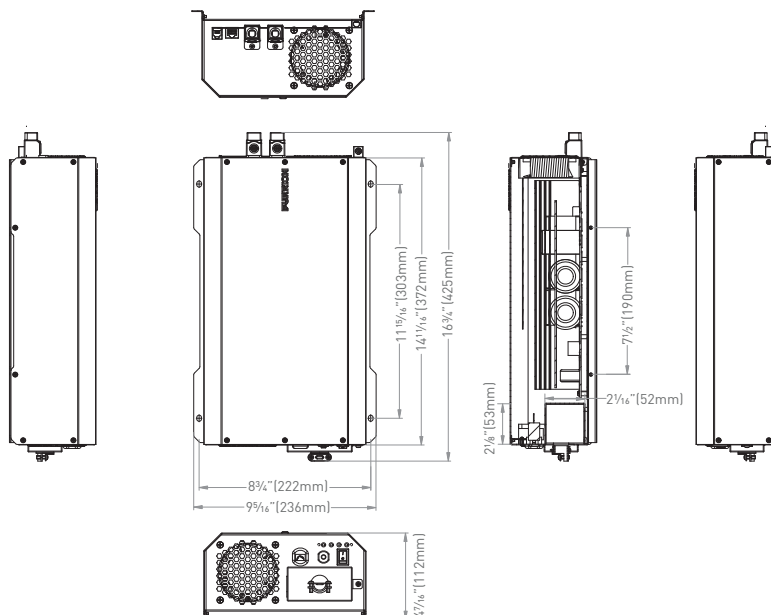

Specifications

Battery Voltage	10-15Vdc
AC Bypass Input	100-120Vac
Output Voltage	115 $\pm$ 5 Vac
Output Frequency	60 $\pm$ 1Hz
Output Waveform	Pure Sine Wave
Continuous Rated Power	1,000w
Surge Output Power (2 Seconds)	2,500w
Maximum Peak Efficiency	88%
Circuit Breaker	15A
Bypass Transfer Time	<20ms
Transfer Relay Rating	16A
Low Battery Protection	✓
Over Voltage Protection	✓
Over Load Protection	✓
Over Temperature Protection	✓
Battery Reverse Protection	✓ (By Fuse)
AC Output Short Circuit Protection	✓
Safety Standard	ETL Listed To UL 458/ CSA C22.2 NO:107.1
EMC Standards	Meet FCC Part 15 Class B
Operation Temperature	32°F to 104°F (0°C to 40°C)
Operation Humidity	<90% RH Non-condensing
Storage Temp., Humidity	-22°F to 158°F (-30°C to 70°C) 10 to 95% RH

Dimensions & Weight

Product Dimensions (W x H x D)	9.31 x 4.44 x 16.75" (236 x 112 x 425mm)
Packaging Type	Brown Box
Quantity Per Box (pcs)	1
Packaging Dimensions (W x H x D)	18.44 x 11.12 x 7.31" (469 x 282 x 185mm)
Net Weight (lbs/kg)	12.8 / 5.8
Gross Weight (lbs/kg)	11.3 / 5.1

Container Load Information

45'HQ Container Load (pcs)	1,760
----------------------------	-------

* Note: "✓"=Equipped



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.