

FDP12WA-BL

AC/DC Wall Mount Distribution Panel



Main Features



AC/DC
DISTRIBUTION
CENTER




COMPATIBLE
WITH FURRION
CONVERTER



EASY
INSTALLATION

FURRION

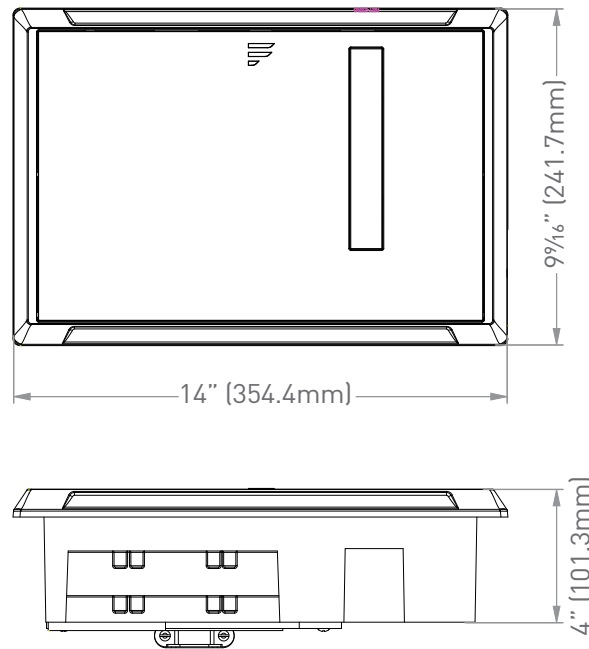

Specifications

System Voltage	Input 120Vac 30Amp or 240Vac 50Amp.
AC Distribution	Max. 12 branches (7 for 30A main; 12 For 50A main)
AC Main Breakers	30Amp or 50Amp x2
AC Receptacle	5-20R 120V 20A receptacle
DC Circuits (Total)	15DC outputs (30Amp x2CH, 20Amp x13CH)
DC Terminal bar	Built-in negative battery terminal
Fuse Status Indicator LED	No light: Working fuse Red light: Broken fuse
Certification	UL67 and FCC Part 15B

Dimensions & Weight

Rough Opening Dimensions (W x H x D)	12.44 x 8.44 x 3" (315.9 x 214.4 x 76.2mm)
Larger Door Assembly Dimensions (W x H x D)	13.88 x 11.75" (352.5 x 298.45mm)
Packaging Type	Brown box
Quantity Per Box (pcs)	1
Packaging Dimensions (W x H x D)	14.56 x 5.69 x 10.44" (370 x 145 x 265 mm)
Net Weight (lbs/kg)	3.7 / 1.7
Gross Weight (lbs/kg)	4.0 / 1.82

MS-FDP12WA-BL-V1.4



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.