

iN-Command®

CONTROL SYSTEMS

GETTING STARTED

Get the app







Download the iN-Command® app to turn your mobile device into the definitive RV Controller.



Connecting the DC to the BCM

The iN-Command® system is comprised of two parts, the DC (Display Commander or touch pad) and the BCM (Body Control Module or main control board). To turn on the DC, hold the power button until the screen flashes. When the DC is on, the EULA (End User License Agreement) screen will display - scroll to the bottom of the screen and select "Accept".

The DC should then connect to the BCM and "Connecting to BCM" will appear momentarily. Next, the Passcode screen will appear. Select "Change passcode" and enter a four-digit code you will remember. This passcode will allow the user access into the iN-Command® interface to change and/or monitor multiple functions of the RV. The DC should then connect to the BCM, and the HOME screen will display.

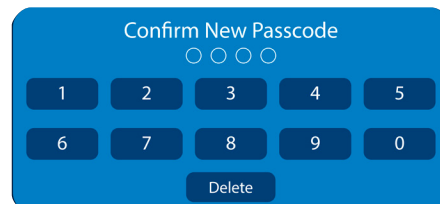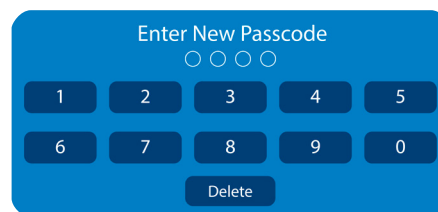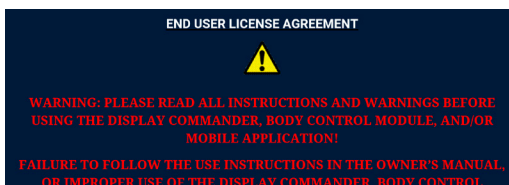

Travel Lock Out

iN-Command® is equipped with a Travel Lock Out feature to ensure certain system functions are unavailable during transit. When the Brake signal or the Tow signal is activated, iN-Command® will lock down all motorized functions. The DC and mobile devices will display "Travel Lock Out On" in red letters and affected buttons will display "Disable". To turn the Travel Lock Out off, the "Unlock" button on the DC inside of the RV must be pressed.



Continue








On the DC, scroll to the bottom of the list of functions and select the **MENU** button, then select the **Bluetooth** button.







ANDROID devices

On the DC, select "**DISCOVER**", then select "**ALLOW**". "Discover" will turn into "End" and start counting down. The iN-Command® ID will appear in "Unpaired Devices" on the device. Select the correct ID. The PAIRING REQUEST screen will show on the DC and device. Select "**Pair**" on both.

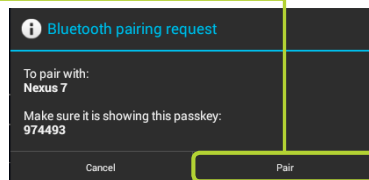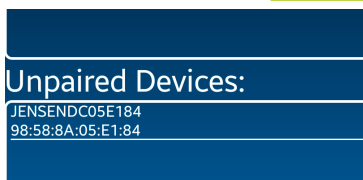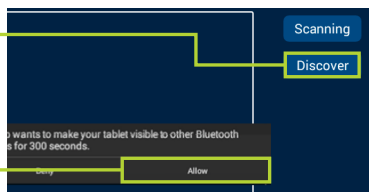

iOS devices



In the Bluetooth Screen on the DC, select Scan. On the iOS Device, go to Settings, then Bluetooth, and turn it on. The iOS Device will appear on Unpaired Devices list. Select it. The Pairing Request screen will appear on the DC and Device. Select "Pair" or "OK" on both. On the iOS Device, ensure the DC is Connected. If not, press "Not Connected" next to the DC ID and it should connect.

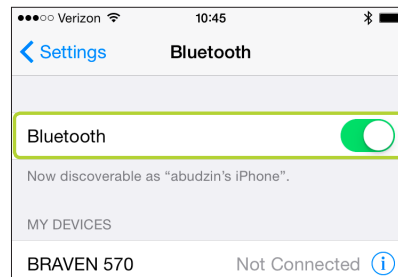

iN-Command® is able to pair to Android and iOS devices using the iN-Command® App. Visit the Google Play and Apple stores on your mobile device to check compatibility of your device. The first time the App is opened, the EULA screen will appear. Scroll through the EULA screen and press Accept. Then enter a New Passcode.

(Procedure is same for both iOS and Android devices)

On the device, select the "**MENU**" button. In MENU, select the "**RESET**" button; select "**FLOOR PLAN**". The button layout should now reflect the floor plan of the RV.

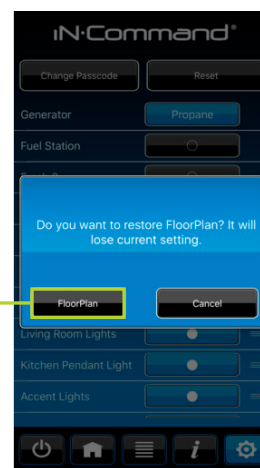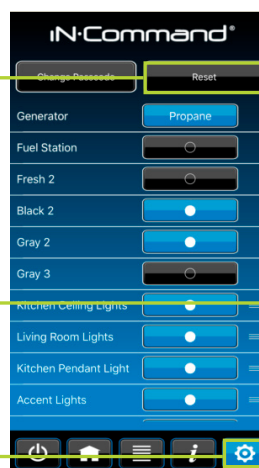

For owner's manual and software updates please visit <http://www.asaelectronics.com/incommand>.

For update instructions, please refer to Software Update section starting on page 22 in the owner's manual.

For further assistance, please call **877-845-8750**.

Patent # (D776,068)
Patent # (D762,644)

MODEL NUMBER: JRVCS1



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.