

FIVSP40A-BL

Furrrion ePod™ Power Station



Main Features



CHARGE UP TO 6 DEVICES
SIMULTANEOUSLY



2X AC OUTPUT



3X USB OUTPUT AND
1X USB C



MAXIMUM OUTPUT
OF 460W




800W SURGE
PROTECTION



OVERCURRENT AND
OVERHEAT PROTECTION

FURRRION

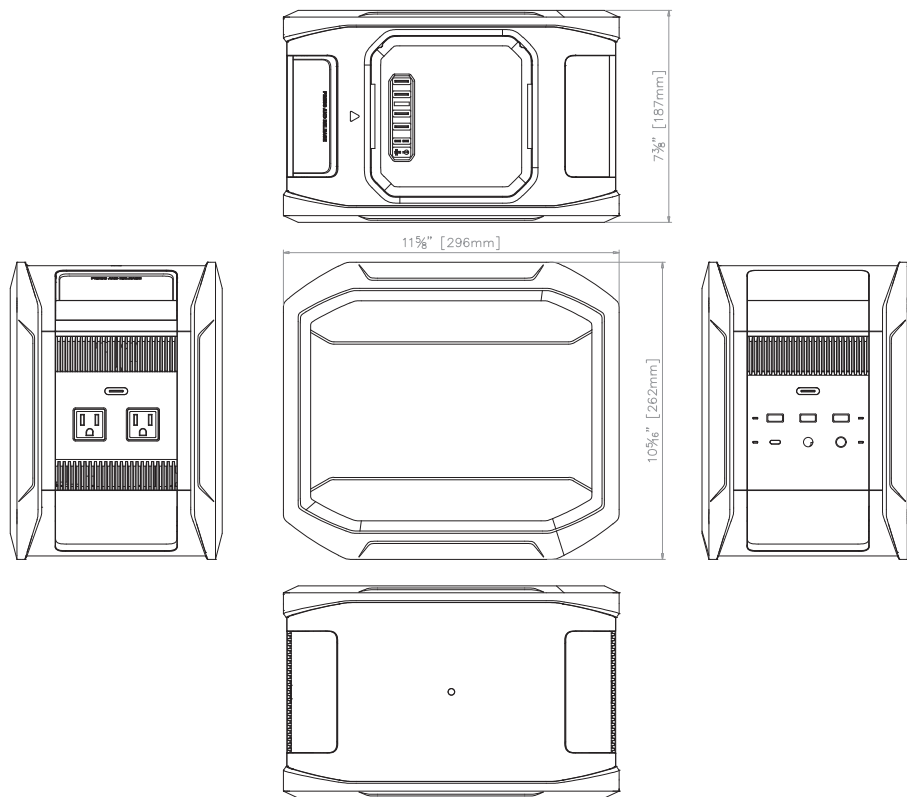

Part Number

Product

FPP04R40-BL



+



+



Specifications

AC Outlet (x2)	NEMA 1-15P 120V, 60Hz, pure sine wave,
AC Output	400W continuous/800W surge max
AC/DC Input	9mm x 3mm, 10 - 22V DC (max. current: 10A)
Solar Input	8mm x 2.5mm, 10 - 22V DC (max. current: 7A)

DC Outputs

USB-C PD 2.0	5V/3A, 9V/3A, 12V/3A, 20V/3A, 60W max
USB-A QC 3.0	5V/2A, 9V/2A, 12V/2A, 24W max
USB-A (x2)	5V/2.4A each, 24W max

Dimensions

Product Size (WxHxD)	11.7 x 10.3 x 7.3" (296 x 262 x 187mm)
Weight (lbs/kg)	11lbs / 5kg

Features

Over Current Protection	✓
Short Circuit Protection	✓
Over Temperature Protection	✓
LCD Display	✓

FIVSP40A-BL-V1.9

CCD-0005671 | REV DATE: 01.26.2023

For all concerns or questions, please contact Lippert | Ph: 432-LIPPERT (432-547-7378) | Web: lippert.com | E-mail: customerservice@lci1.com
Furion® and the Furion logo are trademarks licensed for use by Furion Ltd. and registered in the U.S. and other countries. © 2007-2022 Furion Ltd.





This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.