

98GC2762B

MULTI CHANNEL REMOTE HANDSET

PROGRAMMING GUIDE



RV AWNING PRODUCTS

1361 CALLE AVANZADO, SAN CLEMENTE, CA 92673 (949) 259-4000 FAX (949)276-5500

www.girardrv.com



Girard Systems awnings may be operated in light wind and rain conditions. When periods of heavy rain and or high wind are expected the awning must be closed. Never leave the awning open and unattended.

Damage caused by wind and rain is not covered by warranty.

All awnings must be closed prior to moving the vehicle for any reason. As an extra safety precaution, a visual check that every awning is fully closed is required.

Damage caused by failure to comply with these instructions is not covered by warranty.

Before using your awning, ensure that the area into which the awning will be deployed is free of obstructions (Trees, walls, pillars, posts, other vehicles etc.)

Damage caused by collisions with any of the above or similar is not covered by warranty.

Before using your awning make sure that all of your electrical circuits are operating correctly. Recreational Vehicles can generate AC power from three separate sources. The electrical system transfer switch in your vehicle will select power for the awning as follows:

Shore Power – if connected;

Generator Power – if the generator is running;

Inverter Power – batteries must be charged for inverter operation.

Girard Systems awnings are supplied with an electric motor appropriate to the product.



CONTENTS

The G-Link System	3
Product Description	4
Programming	6
GC136 AC Motor Controller	6
GC274B / GC274C AC motor Controllers	7
98GC74 AC Motor Controller	8
GC732G DC Motor Controller	9
GC1146C DC Motor Controller	10

THE G-LINK SYSTEM

The G-Link motors and control modules provided by Girard Systems communicate by use of RF signals on a frequency of 433.92 MHZ. This eliminates the need for wiring and the drilling of holes in the vehicle. These components must be electronically matched, programmed or paired before use. This is usually done at the Girard Systems factory. Should the need arise for the user to pair a device with the motor controller they must refer to the appropriate manual for the devices applicable to their installation.

PRODUCT DESCRIPTION

The 98GC2762 remote handset is a Multi-channel RF transmitter, powered by a single 3v Lithium battery (CR2450) designed to control up to 15 awnings and operate the LED lighting strips by means of a multi-functional circular control pad. As shown in Fig.1 below.

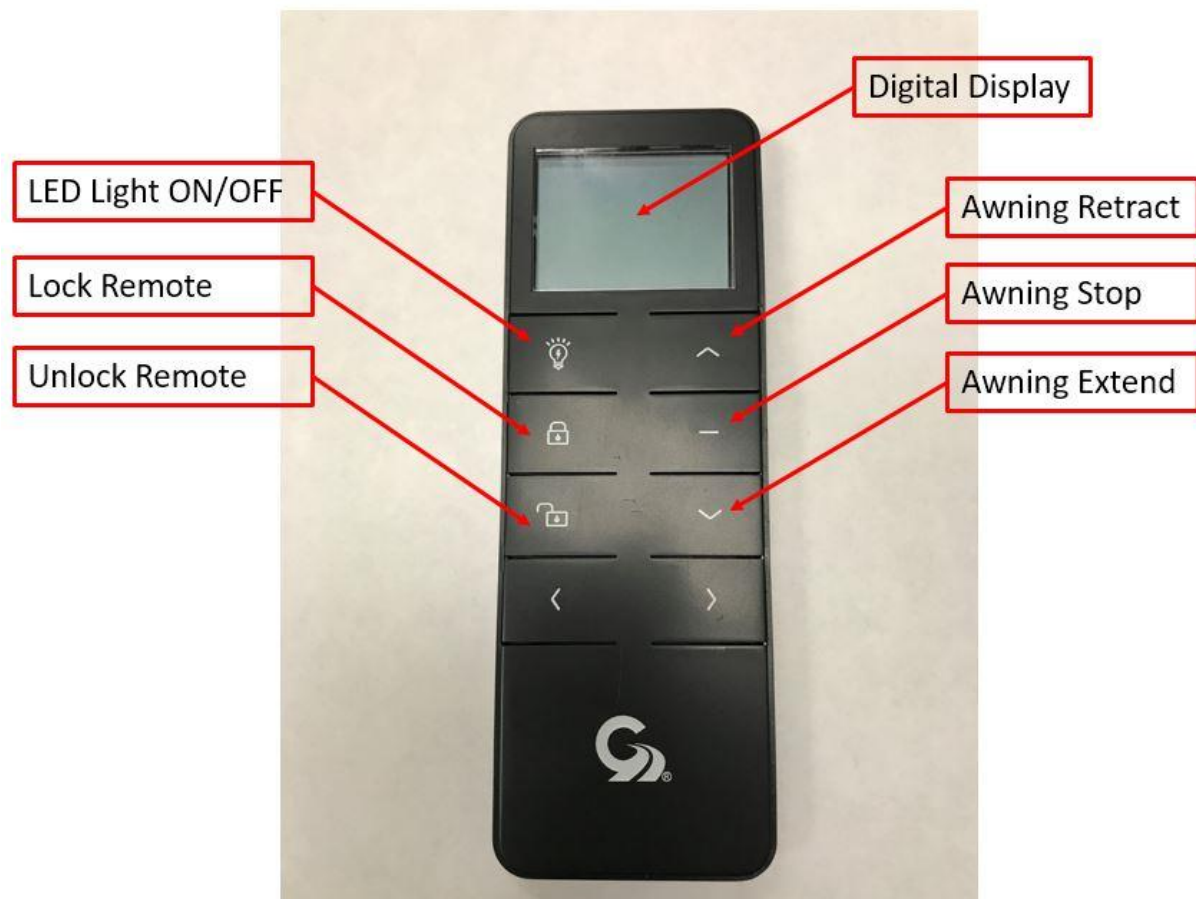


Fig.1

To find the battery turn the remote handset over and slide the cover down;

- The Battery compartment, (into which a single CR2450 3v Lithium battery should be inserted as shown)
- The P2 button (used when pairing the device to some other G-Link Modules)



Fig.2

PROGRAMMING

The following pages give instructions of how to Program or electronically Pair the handset with various motor controllers. Ensure that you select the correct set of instructions for the motor controller on your vehicle.

GC136 AC Motor Controller

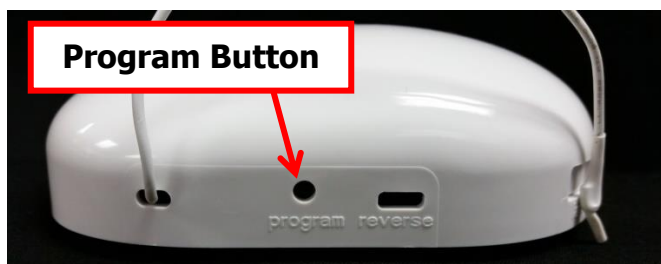


Fig.3



Fig.4

To pair the Remote handset with a GC136 Motor controller, follow the steps below.

Note; when carrying out this part of the procedure each step must be executed within 10 seconds of the previous one or the module will revert to factory settings. It is highly recommended that you read and understand the following sequence before attempting to execute it.

- 1) Ensure that there is power supplied to the Motor controller.
- 2) Using an appropriate tool press the Program button on the Motor controller. See Fig.3 (The Green LED will start blinking)
- 3) Press the STOP button on the Motor Controller. See Fig.4 (The Green LED will remain ON)
- 4) Select the desired channel on the remote handset
- 5) Press the IN button on the remote handset. (The Green LED will extinguish)
- 6) Press the OUT, STOP and IN buttons on the handset to ensure that the Modules have been successfully paired.

GC274B / GC274C AC motor Controllers

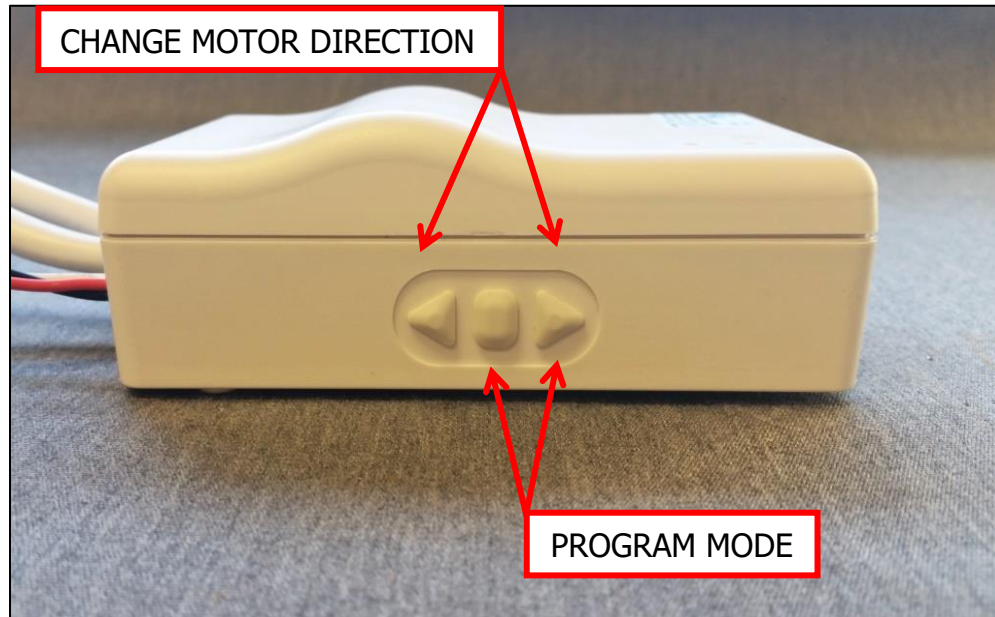


Fig.5

To pair the Remote handset with a GC274A or GC274B follow the steps below.

Note; when carrying out this part of the procedure each step must be executed within 10 seconds of the previous one or the module will revert to factory settings. It is highly recommended that you read and understand the following sequence before attempting to execute it.

- 1) Ensure that there is power supplied to the Motor controller.
 - a. Press and hold the **MIDDLE** and **RIGHT** buttons on the GC274 (Fig 5) for about 3 seconds until the Green LED starts to flash.
 - b. Press **MIDDLE**: The Green LED will stop blinking and remain illuminated.
 - c. Select the desired channel on the remote handset
 - d. Press the **IN** button on the REMOTE DEVICE being programmed. The Green LED on the motor controller will extinguish.
- 2) Change motor direction
 - a. Supply power to **GC274B**
 - b. Simultaneously press the **LEFT** and **RIGHT** buttons of the **GC274B** for at least 6 seconds. The Green LED will illuminate and then blink a few times. When the Green LED extinguishes, the operation is complete.

98GC74 AC Motor Controller



Fig.6

When pairing with the 98GC74 it is advised that the awning to be controlled is manually extended couple of feet to enable the programmer to see if the awning is responding in the correct direction when the buttons on the remote handset are pressed.

The programming window for this module is only 6 seconds so please ensure that the programming instructions are read and understood before attempting to execute them.

- 1) Supply power to the motor control module. (It will beep ONCE)
- 2) Select the desired channel on the remote handset
- 3) Press the P2 button on the Remote Handset TWICE. (The motor controller will beep with each press)
- 4) Press the IN button on the Remote handset. (The awning should retract)

If the awning extends at this point instead of retracting, press the STOP button immediately, then remove the power supply to the motor controller for at least 10 seconds.

Next repeat steps 1 to 3 above then press the OUT button on the Remote handset to complete the programming procedure.

Ensure that the awning responds correctly to the handset by pressing the OUT, STOP and IN buttons alternately.

GC732G DC Motor Controller

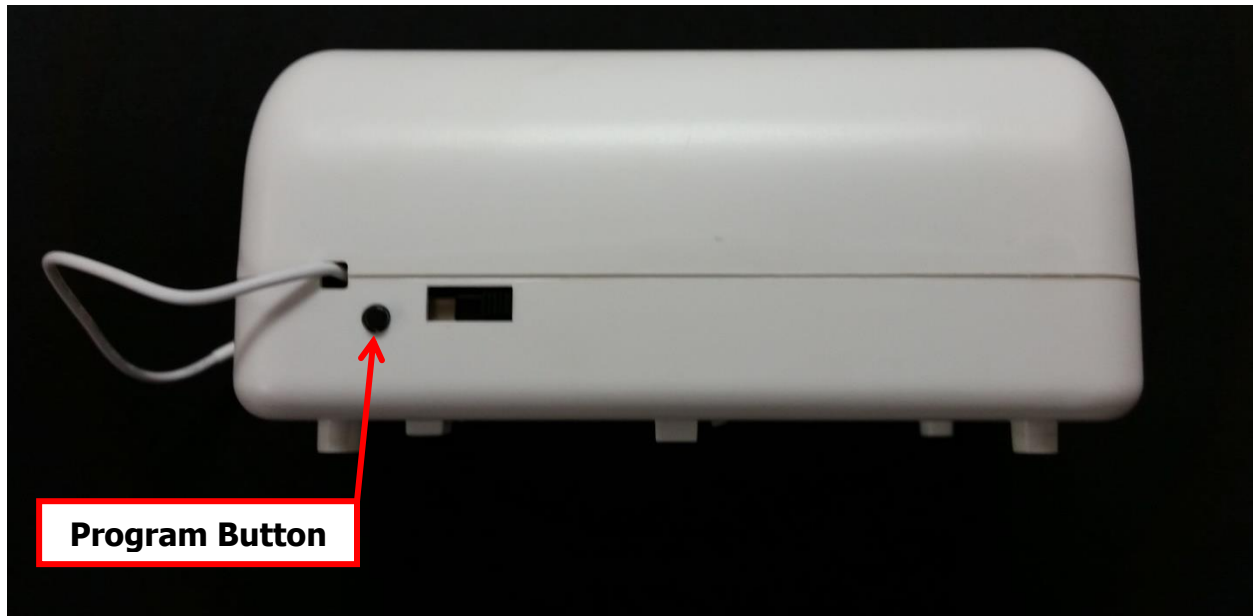


Fig.7

To pair the Remote handset with a GC732G Motor controller, follow the steps below.

Note; when carrying out this part of the procedure each step must be executed within 10 seconds of the previous one or the module will revert to factory settings. It is highly recommended that you read and understand the following sequence before attempting to execute it.

- 1) Ensure that there is power supplied to the Motor controller.
- 2) Press the Program button on the Motor controller. (The Red LED will start blinking)
- 3) Press the STOP button on the Motor Controller. (The Red LED will remain ON)
- 4) Select the desired channel on the remote handset
- 5) Press the IN button on the handset. (The Red LED will extinguish)
- 6) Press the OUT, STOP and IN buttons alternately on the handset to ensure that the Modules have been successfully paired.

GC1146C DC Motor Controller



Fig.8

To pair the Remote handset with a GC1146C Motor controller, follow the steps below.

- Fully extend the awning to ensure smooth operation, and then retract the awning leaving it partially open (about 3 feet).
- Locate the P2 Button on the back of the handset, see figure 2

Note; when carrying out this part of the procedure each step must be executed within 10 seconds of the previous one or the module will revert to factory settings. It is highly recommended that you read and understand the following sequence before attempting to execute it.

- 1) Supply power to the Motor controller. (The GC1146C will emit a soft beep)
- 2) Select the desired channel on the remote handset
- 3) Using an appropriate tool press the P2 button on the back of the Handset TWICE. (The GC1146C will Beep with each press)
- 4) Press the IN button on the wall switch and verify that the awning moves in the desired direction.



Note: If the awning extends at this point instead of retracting, press the STOP button immediately, then remove the power supply to the motor controller for at least 10 seconds.

Next repeat steps 1, 2 and 3 above then press the OUT button on the wall switch to complete the programming procedure.

Ensure that the awning responds correctly to the wall switch by pressing the OUT, STOP and IN buttons alternately.

For queries or assistance with programming any remote handset to any of your G-Link devices please call Girard Systems toll free on 800-382-8442 between 7:30am and 5:00pm P.S.T.



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.