


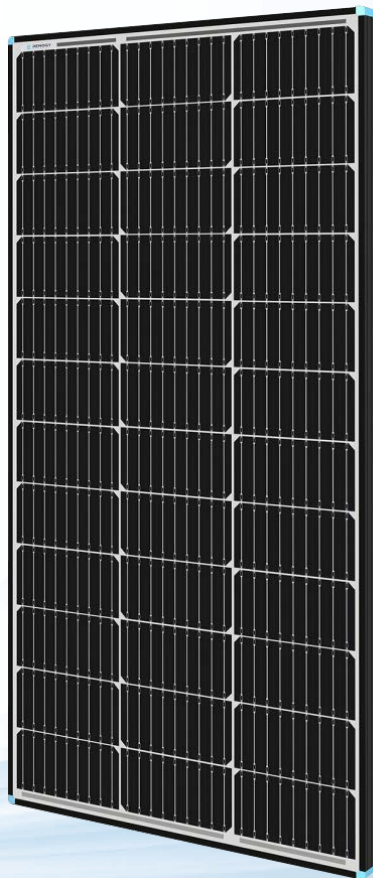

RSP100D-BK

100W Monocrystalline Solar Panel

Key Features

Sleek black frame design and durable construction, the Renogy 100 Watt 12 Volt Monocrystalline Panel provides you with the highest efficiency per surface area.

- High module conversion efficiency
- Top ranked PTC rating
- Quick and inexpensive mounting
- 100% EL testing on all Renogy modules
- No hot spots guaranteed

Potential Uses

The Renogy 100W solar panel can be used in various off-grid applications that include 12 and 24 volts arrays, water pumping systems, signaling systems and other off-grid applications.



Power Output Warranty



Material and Workmanship Warranty

RSP100D-BK

100W Monocrystalline Solar Panel

Electrical Data

Maximum Power at STC*	100 W
Optimum Operating Voltage (V_{oc})	24.3 V
Optimum Operating Current (I_{sc})	5.21 A
Open Circuit Voltage (V_{mp})	20.4 V
Short Circuit Voltage (I_{mp})	4.91 A
Module Efficiency	17.8 %
Maximum System Voltage	600 VDC UL
Maximum Series Fuse Rating	15 A


Thermal Characteristics

Operating Module Temperature	-40°C to +194°C
Nominal Operating Cell Temperature (NOCT)	47±2°C
Temperature Coefficient of Pmax	-0.37%/°C
Temperature Coefficient of Voc	-0.28%/°C
Temperature Coefficient of Isc	0.048%/°C

Junction Box

IP Rating	IP 65
Diode Type	15SQ045
Number of Diodes	2 Diode(s)
Output Cables	14 AWG (1.97 ft)

Module Diagram

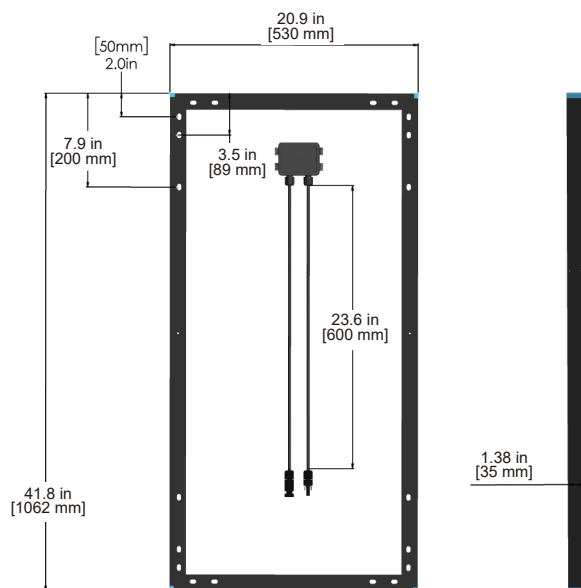

Mechanical Data

Solar Cell Type	Monocrystalline (6.5 x 3.3 in)
Number of Cells	36 (3 x 12)
Dimensions	41.8 x 20.9 x 1.38 in (1062 x 530 x 35 mm)
Weight	14.1 lbs (6.4 kg)
Front Glass	Tempered Glass 0.13 in (3.2 mm)
Frame	Black Anodized Aluminum Alloy
Connectors	Solar Connectors
Fire Rating	Class C


MC4 Connectors

Rated Current	30A
Maximum Voltage	1000V DC
Maximum AWG Size Range	10 AWG
Temperature Range	-40°F to 194°F
IP Rating	IP 67

Certifications



IV-Curve

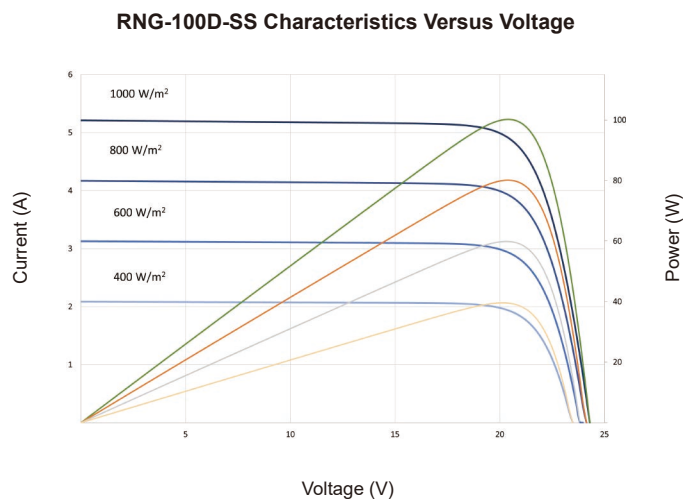

*All specifications and data described in this data sheet are tested under Standard Test Conditions (STC - Irradiance: 1000W/m², Temperature: 25 °C, Air Mass: 1.5) and may deviate marginally from actual values. Renogy and any of its affiliates has reserved the right to make any modifications to the information on this data sheet without notice. It is our goal to supply our customers with the most recent information regarding our products. These data sheets can be found in the downloads section of our website, www.renogy.com



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.