



OWNER'S MANUAL

SMARTCONNECT



COMPATIBLE WITH



ODYSSEY



JHUB



RVMASTER



JAYCOMMAND

TEAMBMPRO.COM



BM PRO

POWERING YOUR ADVENTURES

With over 50 years' experience in power solutions combined with manufacturing and design facilities in Melbourne, Australia, BM PRO are the leading experts in RV power and control management.

Inspired by the great outdoors, we have created a range of rugged, smart and reliable products to power your adventures.

Our range of battery, power and RV management and control systems gives you peace of mind when you are on the road, so that you can relax in even the most far flung destinations, knowing you have control over your power needs.

To learn more about the BM PRO range of products, please visit our website **teambmpro.com**



SAFETY PRECAUTIONS

Please read the Safety Precautions before installing or using SmartConnect products. Be sure to observe all precautions without fail. Failure to observe these instructions properly may result in personal damage, or personal injury which depending on the circumstances may be serious.



Only install the SmartSense gas cylinder/propane gas sensor as described in this manual. No field assembly is required. The sync process to the app on your smart display, as described below, should occur in an area clearly out of any explosive atmosphere.



SmartSense is not intended for repair or maintenance, other than changing the battery per subsequent sections of this manual. Any modification of the SmartSense may result in an unsafe condition.



Do not use SmartSense for any other application, other environment, or in any other manner than as stated in this manual. Any misuse may result in an unsafe condition.

CONTENTS

SAFETY PRECAUTIONS	4
ABOUT SMARTCONNECT	8
USING THIS MANUAL	8
COMPATIBLE SYSTEMS.	9
SMARTPRESSURE	10
INSTALLING SMARTPRESSURE SENSORS	10
PAIRING SMARTPRESSURE SENSORS.	11
SMARTPRESSURE PAIRING UNSUCCESSFUL	13
PRESSURE SIGNAL NOT DETECTED	13
UNPAIRING SMARTPRESSURE SENSORS	14
SMARTPRESSURE SETTINGS	15
SMARTSENSE	16
INSTALLING SMARTSENSE SENSORS	16
PAIRING SMARTSENSE SENSORS	17
SMARTSENSE PAIRING UNSUCCESSFUL	21
SENSOR READING NOT DETECTED	22
UNPAIRING SMARTSENSE SENSORS	22
SMARTTEMP	23
PAIRING SMARTTEMP SENSORS	23
SMARTTEMP PAIRING UNSUCCESSFUL	25
UNPAIRING SMARTTEMP SENSORS	26
SMARTTEMP SETTINGS	27

MANUAL PART 035849
REV 1.0



Designed by **BM PRO**, one of Australia’s leading power solution experts, the **BM PRO** product range is proudly Australian made in Melbourne and represent a high-quality product that will provide years of service.

DISCLAIMER: **BM PRO** accepts no liability for any loss or damage which may occur from the improper or unsafe use of its products. Warranty is only valid if the unit has not been modified or misused by the customer.

BATTERY REPLACEMENT 28

REPLACING SMARTPRESSURE SENSOR BATTERIES 28

REPLACING SMARTSENSE SENSOR BATTERIES. 29

REPLACING SMARTTEMP SENSOR BATTERIES 29

COMPLIANCE 30

WARRANTY TERMS AND CONDITIONS (AUSTRALIA) 32

LIMITED WARRANTY TERMS AND CONDITIONS (USA). 33

ABOUT SMARTCONNECT

SmartConnect is a range of RV Bluetooth sensors which can be paired to your BMPRO Smart RV System to monitor your tyre pressures, gas propane levels and temperatures.

SmartConnect allows the use of a single app to provide you with accurate information on the status of critical functions of your RV.

SmartConnect can be integrated with BMPRO Smart RV control and monitoring systems, such as JHub, Odyssey, JAYCOMMAND and RVMaster.

- ❏ Install a SmartPressure sensor on your tyres to constantly monitor tyre pressure and immediately detect a leak.
- ❏ Attach a SmartSense sensor to your propane gas cylinders to quickly determine how much gas you have available.
- ❏ Place a SmartTemp sensor somewhere inside your RV to monitor temperatures from your monitoring system.

USING THIS MANUAL

This manual can be used in conjunction with any of BMPRO's Smart RV systems.

As each BMPRO Smart RV app is displayed differently, screenshots of each app are provided throughout this manual in order to assist you with your specific Smart RV app.

Keep an eye out for your specific app's icon in order to quickly see which image to refer to.

COMPATIBLE SYSTEMS

SmartConnect is fully integrated into BMPRO's entire suite of Smart RV systems.



All SmartConnect functions are accessible through the app you use for your particular Smart RV system.

Once you have paired your SmartConnect sensors to your app, you will be able to view information from the sensors directly on your app.

All of BMPRO's Smart RV apps are available at the Apple App Store or Google Play Store, as well as any onboard monitor.

SMARTCONNECT RANGE

SMARTPRESSURE

The SmartPressure Tyre Pressure Monitoring System (TPMS) allows the pairing and monitoring of your tyres through your Smart RV system, with the flexibility of adjusting your maximum temperature and minimum pressure warning limits.

The SmartPressure sensor will transmit every 10 minutes when your RV is stationary and every minute when in motion.

The SmartPressure sensor will transmit at a faster rate if a leak in the tyre is detected. In this situation:

- ☑ Wait for the sensor to send the information
- ☑ Check if the sensor is installed correctly
- ☑ Check the sensor's battery status.



SmartPressure Sensor

INSTALLING SMARTPRESSURE SENSORS

SmartPressure sensors can be installed by following the below instructions:


1. Screw on the anti-theft nut.
2. Tighten the sensor.
3. Screw the nut anti-clockwise to lock the sensor.
4. Tighten the anti-theft nut.




PAIRING SMARTPRESSURE SENSORS

To pair SmartPressure sensors:


- 1. Go to the Status Screen where tyre pressure is displayed.
- 2. Press the "Pair" button at the location where you want to install it.

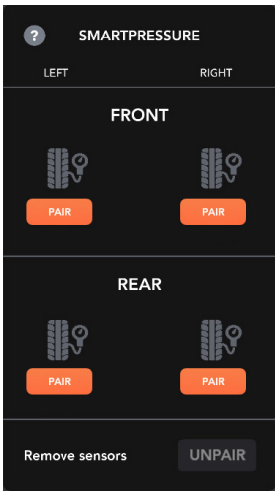


JHub SmartPressure Pair Screen

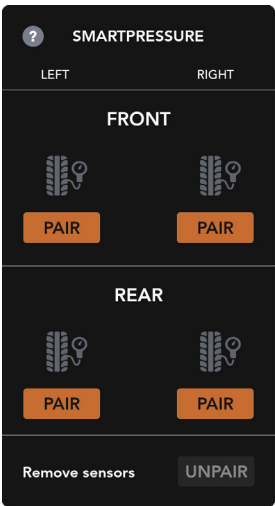

Odyssey SmartPressure Pair Screen

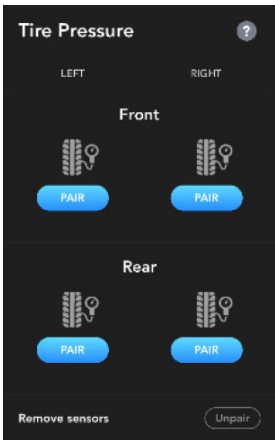


JAYCOMMAND SmartPressure Pair Screen

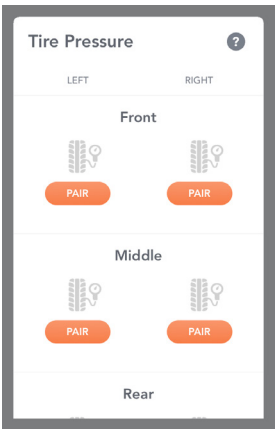


RVMaster SmartPressure Pair Screen


- After Pressing the “Pair” button, install the pressure sensor on the same selected tyre. Refer to the **Installing SmartPressure Sensors** section.
- If pairing is successful, the tyre icon will change from grey to white. The pressure and temperature of the tyre will be displayed.

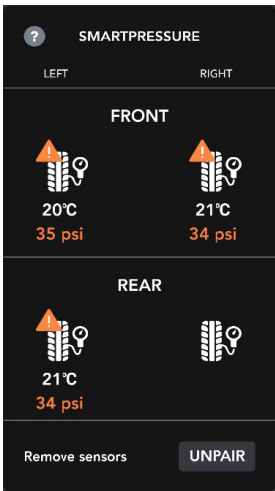


 JHUB
SmartPressure
Tyre Screen

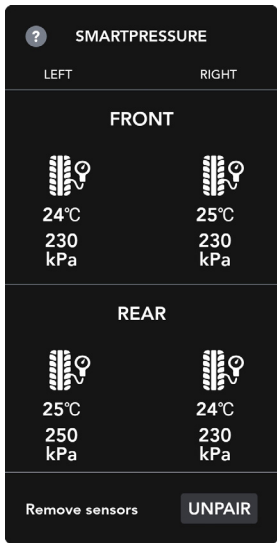

 Odyssey
SmartPressure
Tyre Screen

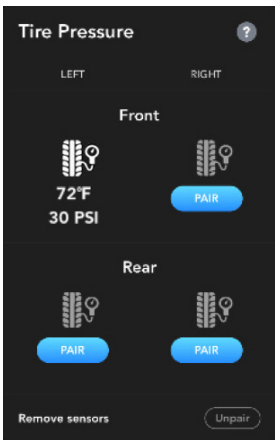


 JAYCOMMAND
SmartPressure
Tire Screen

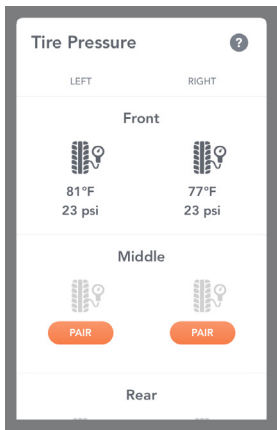

 RVMaster
SmartPressure
Tire Screen

SMARTPRESSURE PAIRING UNSUCCESSFUL

If pairing was unsuccessful, a notification message will appear stating "Pairing Failed: Cannot Detect Sensor".



Pairing Failed notification

Press "TRY AGAIN" to restart the process.

If the sensor fails to pair after several attempts, refer to the **Battery Replacement** section to check the battery status of the sensor and for instructions on battery replacement.

PRESSURE SIGNAL NOT DETECTED

If a valid pressure signal is not detected, the pressure will show as "--".


In this situation:

- ☐ Wait for the sensor to send the information
- ☐ Check if the sensor is installed on the tyre
- ☐ Check the sensor battery status.


UNPAIRING SMARTPRESSURE SENSORS

To unpair SmartPressure sensors:


- 1. Press the “UNPAIR” button for the tyre you want to unpair.
- 2. Press “DONE” to confirm.

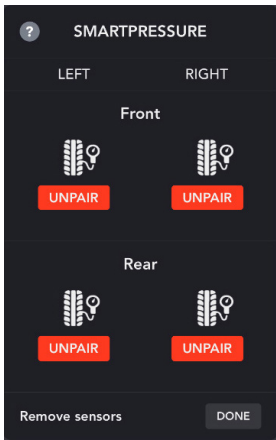

JHub/Odyssey
SmartPressure
Unpair Screen

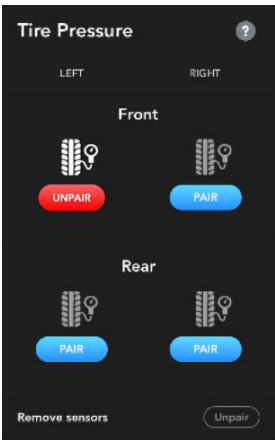

JAYCOMMAND
SmartPressure
Unpair Screen

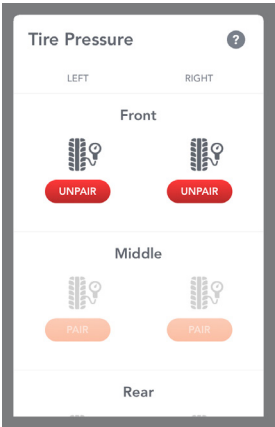


RVMaster
SmartPressure
Unpair Screen

SMARTPRESSURE SETTINGS

The SmartPressure TPMS allows you to adjust the maximum temperature and minimum pressure warning limits of your tyres.

Press the “SETTINGS” button at the top-right of the screen to set the minimum pressure and maximum temperature limits.

If the tyre pressure falls below the minimum adjusted pressure, or if the temperature exceeds the maximum adjusted temperature, a warning notification will display.

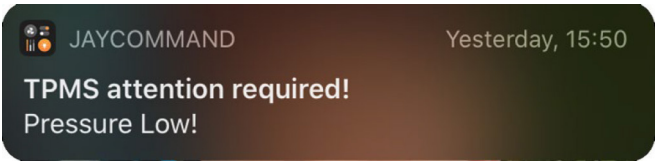

SmartPressure Warning Notification

The SmartSense propane gas sensor allows you to directly monitor the levels of gas in a gas cylinder through your Smart RV system.



INSTALLING SMARTSENSE SENSORS

SmartSense sensors can be installed by following the below instructions:

1. On the propane gas tank, ensure the base is clean. Remove any debris, excess paint or rust.
2. Using the supplied grease, apply a generous amount to the rubber pads on the back of the sensor.
3. The sensor mounts to the base of the tank using magnets. The rubber pad between the magnets must make good contact with the tank, with no contaminants in between and must be aligned to the center of the tank.



SmartSense
Propane Gas Sensor



Installing SmartSense Sensors


4. Return the tank to its upright position.

Ensure the tank is on a flat and level surface, or is otherwise level with ground. Even a slight tilt can degrade the quality of the measurement. After a few seconds, up to a few minutes, the propane will settle and the readings will stabilise.

PAIRING SMARTSENSE SENSORS

To pair SmartSense sensors:


- 1. Go to the SmartConnect or Energy Center screen where the gas tank levels are displayed.
- 2. In the top-right corner, press the "Add" button.

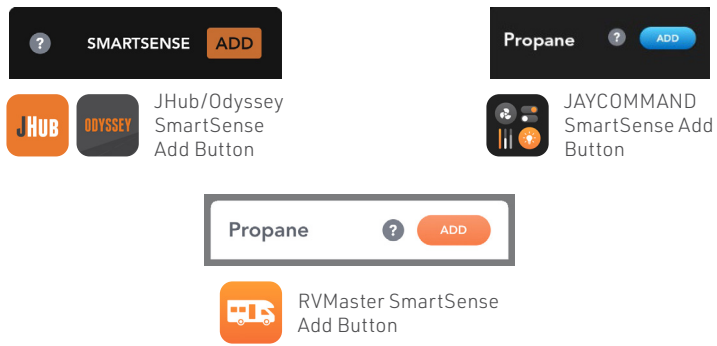


3. A notification will appear with instructions on how to pair the SmartSense sensor.



JHub SmartSense
Add Screen



Odyssey SmartSense
Add Screen




JAYCOMMAND
SmartSense Add
Screen



RVMaster SmartSense
Add Screen


4. Select the bottle size.




JHub SmartSense Selection Screen



Odyssey SmartSense Selection Screen



JAYCOMMAND SmartSense Selection Screen




RVMaster SmartSense Selection Screen


5. Press the "PAIR" button.
6. Press the orange sync button on the propane sensor 6 times. This permanently disables Sleep Mode, which is the factory setting. After the first use, only a single press is required to resync or connect a new device.




7. The gas bottle will then appear on the SmartConnect page.



JHUB SmartSense
Status

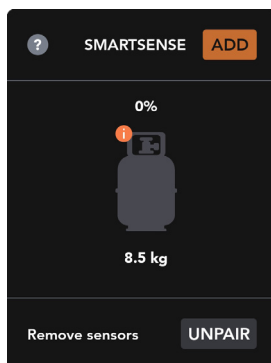

Odyssey SmartSense
Status



JAYCOMMAND
SmartSense Status



RVMaster
SmartSense Status




WARNING


Once SmartSense is synced to your smart display, the sensor will operate continually until the battery is removed or changed. Device will then operate continually until battery is otherwise removed or changed. There is no "power off" mode. Once operational, the sensor may be moved, repositioned, or removed as needed, without any special instruction or changes to the sensor.

SMARTSENSE PAIRING UNSUCCESSFUL


If pairing was unsuccessful, a message will appear stating "Pairing Failed: Cannot Detect Sensor".




JHub SmartSense
Pairing Failed



Odyssey SmartSense
Pairing Failed



JAYCOMMAND
SmartSense
Pairing Failed



RVMaster
SmartSense
Pairing Failed

If the SmartSense sensor fails to pair:

- 📱 Move the propane tank and sensor closer to your phone or Smart RV system.
- 📱 Check the sensor battery status.

If the sensor fails to pair after several attempts, refer to the **Battery Replacement** section to check the battery status of the sensor and for instructions on battery replacement.

SENSOR READING NOT DETECTED

If a valid reading is not received by the system, the tank will display "--".


In this situation:

- ☑ Quickly press the orange sync button on the sensor 6x times to wake it.
- ☑ Wait for the sensor to send the information
- ☑ Check the sensor battery status.
- ☑ Move the propane tank and sensor closer to your phone or Smart RV system.


UNPAIRING SMARTSENSE SENSORS

To unpair SmartSense sensors:


1. Press the "UNPAIR" button for the sensor you want to unpair.
2. Press "DONE" to confirm.



JHUB/Odyssey
SmartSense
Unpair Screen



JAYCOMMAND
SmartSense
Unpair Screen



RVMaster
SmartSense
Unpair Screen

SMARTCONNECT RANGE SMARTTEMP

The SmartTemp Bluetooth temperature sensors allow you to monitor temperatures throughout your RV using your Smart RV system.


PAIRING SMARTTEMP SENSORS

To pair SmartTemp sensors:


1. Go to the SmartConnect or Status screen.
2. Press the "Add" button.




SmartTemp Sensor



JHub/Odyssey
SmartTemp
Add Button




JAYCOMMAND
SmartTemp
Add Button




RVMaster
SmartTemp Add
Button


3. A pop-up will appear with pairing instructions. Select the desired sensor name.
4. A list will appear to select the temperature sensor location.




JHub Add
Temperature
Sensor Screen



Odyssey Add
Temperature
Sensor Screen




JAYCOMMAND
Add Temperature
Sensor Screen




RVMaster Add
Temperature
Sensor Screen

5. Turn on the SmartTemp sensor by pressing and hold the sensor power button until the light turns green.

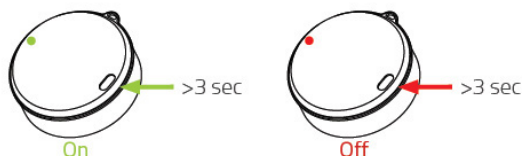


Turning on/off the SmartTemp sensor


6. In the Smart RV system, press the "PAIR" button.
7. After pairing is successful temperatures sensors will be listed and temperatures will be indicated.

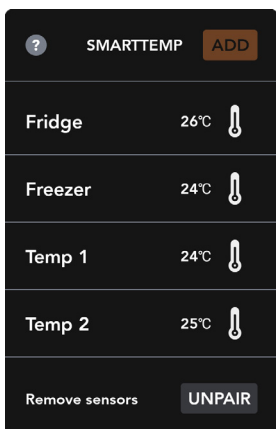

JHub/Odyssey
SmartTemp
Listings




JAYCOMMAND
SmartTemp
Listings




RVMaster
SmartTemp Listings

SMARTTEMP PAIRING UNSUCCESSFUL


If pairing unsuccessful a message will appear stating “Pairing Failed: Cannot Detect Sensor”.




JHub SmartTemp
Pairing Failed



Odyssey
SmartTemp
Pairing Failed



JAYCOMMAND
SmartTemp
Pairing Failed



RVMaster
SmartTemp
Pairing Failed


Press “RETRY” to attempt paring again.

If the sensor fails to pair after several attempts, refer to the **Battery Replacement** section to check the battery status of the sensor and for instructions on battery replacement.


UNPAIRING SMARTTEMP SENSORS

To unpair SmartTemp sensors:


- 1. Press the "UNPAIR" button for the sensor you want to unpair.
- 2. Press "DONE" to confirm.



JHub/Odyssey
SmartTemp
Unpair Screen



JAYCOMMAND
SmartTemp
Unpair Screen





RVMaster
SmartTemp
Unpair Screen

SMARTTEMP SETTINGS

The SmartTemp sensors allow you to adjust the maximum temperature warning limits.

Press the "SETTINGS" button at the top-right of the screen to set the minimum and maximum temperature limits.

If the temperature limits are exceeded, a warning will display.

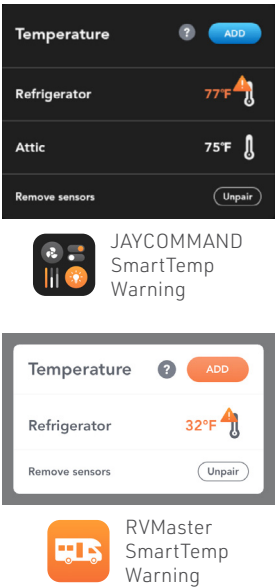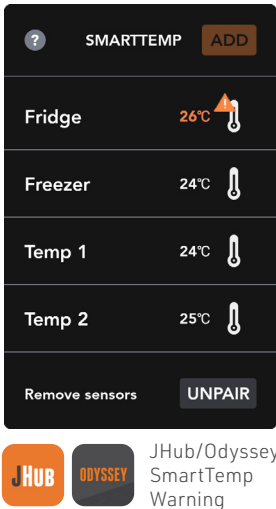

BATTERY REPLACEMENT

The monitoring system displays battery status information to help you know when you need to change the batteries of your SmartConnect devices.

To check if any SmartConnect sensor batteries need to be changed:

1. Press the "SETTINGS" button at the top-right of the screen.
2. Press "BATTERY LEVEL".
3. Choose the SmartConnect sensor you want to check (SmartPressure, SmartSense, SmartTemp).

Under the selected sensor, the battery status will display either "Battery OK" or "Battery Low".

If "Battery Low" appears, the battery will need to be replaced.

REPLACING SMARTPRESSURE SENSOR BATTERIES

SmartPressure sensor batteries can be replaced by following the below instructions:

1. Remove the sensor.
2. Loosen the sensor housing with a wrench.



3. Open the outer case of the sensor.
4. Replace the CR1632 battery.



If you are replacing multiple SmartPressure batteries at once, take care not to mix them up to avoid installing the wrong sensor.

REPLACING SMARTSENSE SENSOR BATTERIES

SmartSense sensor batteries can be replaced by following the below instructions:

Using a small screwdriver, lift the lid which is held by the snap fit.



Carefully lift the board with the electronics. Replace the CR2032 battery.



Place the lid back into base and press down fully to re-engage all 4 snap fits.



Replacing SmartSense Sensor Batteries

REPLACING SMARTTEMP SENSOR BATTERIES

SmartTemp sensor batteries can be replaced by following the below instructions:

Using a small screwdriver, lift the lid from the recess side.



Carefully lift the board with the electronics. Replace the CR2477 battery.



Align the groove in the PCB with two pieces of plastic.



Align the button on the PCB with the button on the base of sensor. Press the base down until it is locked.



Replacing SmartTemp Sensor Batteries

COMPLIANCE

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna,
- Increase the separation between the equipment and receiver,
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected,
- Consult the dealer or an experienced radio/TV technician for help.

Warning: Any changes or modifications not expressly approved by BMPRO could void the user's authority to operate this equipment.

This device contains licence-exempt transmitter(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

(1) This device may not cause interference.

(2) This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

1. L'appareil ne doit pas produire de brouillage;
2. L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This device is in compliance with the Radio Equipment Directive (2014/53/EU) of the European Union, and the Radio Equipment Regulation 2017 of the United Kingdom.

The full text of the UK and EU declaration of conformity is available at teambmp.com/wp-content/uploads/eu-and-uk-declaration-of-conformity.pdf

For the following equipment:

Product Name: SmartPressure Sensor

Brand Name: BMPRO

Model No.: RVTYR201

Setec BMPRO Pty Ltd

Frequency Range: 2402-2480MHz

RF Output Power: -34.36dBm (EIRP)

WARRANTY TERMS AND CONDITIONS (AUSTRALIA)

Registering your BMPRO product is an important step to ensure that you receive all the benefits you are entitled to. Please visit teambmp.com to complete the online registration form for your new product today.

1. BMPRO goods come with guarantees that cannot be excluded under Australian Consumer Law. For major failures with the service, you are entitled:

- to cancel your service contract with us; and
- to a refund for the unused portion, or to compensation for its reduced value.

You are also entitled to choose a refund or replacement for major failures with goods. If a failure with the goods or a service does not amount to a major failure, you are entitled to have the failure rectified in a reasonable time. If this is not done you are entitled to a refund for the goods and to cancel the contract for the service and obtain a refund of any unused portion. You are also entitled to be compensated for any other reasonably foreseeable loss or damage from a failure in the goods or service.

2. BMPRO warrants products against defects for a period of one year, commencing from the original date of purchase. Proof of purchase is required before you can make a claim under this warranty.

HOW TO PROTECT YOUR RIGHTS UNDER THIS WARRANTY:

3. This warranty does not extend to product failures or defects caused by, or associated with, but not limited to: failure to install or maintain correctly, unsuitable physical or operating environment, accident, acts of God, hazard, misuse, unauthorised repair, modification or alteration, natural disaster, corrosive environment, insect or vermin infestation and failure to comply with any additional instructions supplied with the product.

4. BMPRO may seek reimbursement of any costs incurred by BMPRO when a product is found to be in proper working order or damaged as a result of any of the warranty exclusions mentioned in point

5. To enquire or make a claim under this warranty, please follow these steps:

a) Prior to returning a BMPRO product, please email customerservice@teambmp.com to obtain a Return Material Authorisation (RMA) number

b) Package and send the product to:

BMPRO Warranty Department
19 Henderson Road
Knoxfield, VIC 3180

Please mark RMA details on the outside of the packaging

c) Please ensure the package also includes: a copy of the proof of purchase, a detailed description of the fault and your contact details including phone number and return address.

6. BMPRO will not be liable for any costs, charges or expenses incurred in the process of returning a product in order to initiate a warranty claim.

LIMITED WARRANTY TERMS AND CONDITIONS (USA)

Registering your BMPRO product is an important step to ensure that you receive all the benefits you are entitled to. Please visit **teambmp.com** to complete the online registration form for your new product today.

What this Limited Warranty Covers

This warranty covers any defect or malfunction in your BMPRO product. Under this warranty you are entitled to have such goods replaced, repaired or refunded.

What this Limited Warranty Does Not Cover

This warranty does not extend to product failures or defects caused by, or associated with, but not limited to:

- Failure to install or maintain correctly, unsuitable physical or operating environment, accident, acts of God, hazard, misuse, unauthorized repair, modification or alteration, natural disaster, corrosive environment, insect or vermin infestation and failure to comply with any additional instructions supplied with the product.
- BMPRO may seek reimbursement of any costs incurred when a product is found to be in proper working order or damaged as a result of any of the warranty exclusions listed above.
- BMPRO will not be liable for any costs, charges or expenses incurred in the process of returning a product to initiate a warranty claim.

How Long the Warranty Lasts

BMPRO warrants products against defects for a period of one year, commencing from the original date of purchase.

Claims Process

Proof of purchase is required before the product can be deemed to be within the warranty period.

To enquire or make a claim under this warranty, please follow these steps:

A. Prior to returning a BMPRO product, please email service@teambmp.com to obtain a Return Material Authorisation (RMA) number.

B. Package and send the product to:

**BMPRO WARRANTY DEPARTMENT
UNIT 1 821 E WINDSOR AVE
ELKHART IN 46514**

Please mark RMA details on the outside of the packaging.

C. Please ensure the package also includes: a copy of the proof of purchase, a detailed description of the fault and your contact details including phone number and return address.

How State Law Applies

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

POWERING YOUR ADVENTURES.



TEAM
BMPRO
.COM

BMPRO

customerservice@teambmp.com

19 Henderson Rd, Knoxfield VIC 3180 Australia | Unit 1, 821 E Windsor Ave, Elkhart IN 46514 USA

teambmp.com



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.