


WF-8950L2-REP

Lithium Converter Replacement Kit



THE HEARTBEAT OF TODAY'S RVs

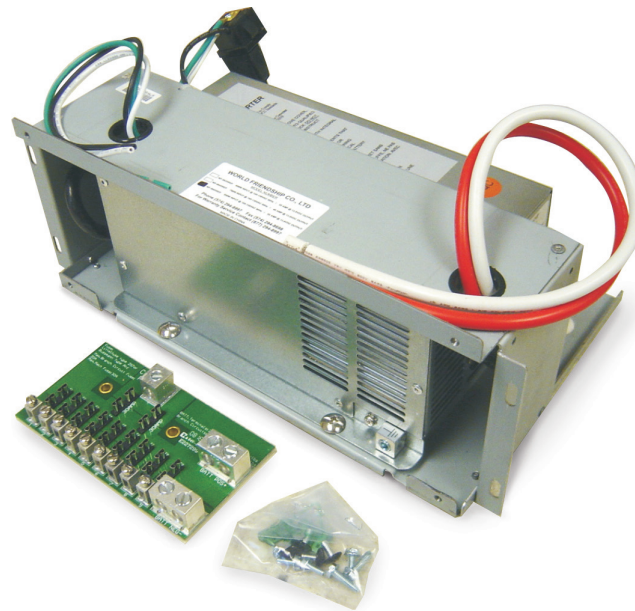

Model WF-8950L2-REP

Output: 50 Amps DC
Input: 105-130 VAC,
60 Hz, 940W


Easy Upgrade and Installation for Lithium

Our WF-8950L2-REP lithium converter replacement kit allows easy upgrade of existing power centers. Technicians can easily remove the lower section of certain power center brands and slide in the WF-8950L2-REP unit. This exchange upgrades the old single stage charger to a high-performance three-stage charging powerhouse. To make installation easy, WFCO's complete replacement kit includes the converter, a new DC fuse board, and required fasteners.

The WFCO WF-8950L2-REP is optimized to safely charge deep-cycle lithium iron phosphate batteries, while powering the RV's lights and appliances. The multi-stage process ensures a safe operating voltage for all loads, replaces energy back into the lithium-ion battery, and assures the lithium cells inside the batteries remain balanced.

Reliability. Vertically integrated, WFCO has total supply chain control, ensuring quality materials, parts, and processes at each stage. Components are quality tested at critical manufacturing stages resulting in zero faults at the final 4-hour burn-in test, helping keep warranty claims below 1%. All models are UL* and cUL* listed and FCC Class B compliant.

PRODUCT FEATURES

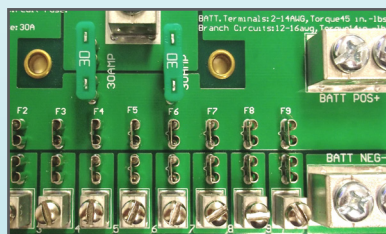

A DC fuse board panel is included in the kit.


The WF-8950L2-REP provides all of WFCO's performance standards:

- Quiet Operation
- Filtered Power
- Overload Protection
- Short Circuit Protection
- FCC Class B Approval

WF-8950L2-REP

EASY INSTALLATION

All WFCO models are designed with the installer and assembly line in mind. We work with installers every day to find ways to streamline installation to reduce time and fiddle factor.

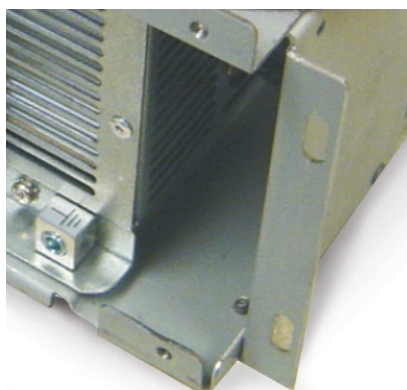

The kit consists of the converter/charger mounted into a metal bracket to make installation easy as an upgrade or replacement for multiple brands of power converters.

All fasteners are included.

SPECIFICATIONS	WF-8950L2-REP
Power Input	940W
Input Voltage	105 VAC - 130 VAC / 60 Hz
Output Current	50A
Converter Type	2 Stage Converter Charger
Voltage Output	13.6 - 14.6 VDC
Normal mode	13.6 VDC
Bulk charge mode	14.6 VDC
Kit Size:	12 1/8"W x 4 3/4"H x 7 13/16"D
Outer Dimensions	13 1/4"W x 5 1/4"H x 7 7/8"D
Fuse Board Dimensions:	2 7/8"W x 5 1/4"H x 7/8"D
Weight	10.25 lbs.

Certifications: UL* and cUL* listed and FCC Class B compliant.
Specifications are subject to change without notice or obligation.



ALL MODELS:

Standard Safety Features/Protections:
Over Current, Over Temperature, Over
Voltage, Reverse Polarity

Installation:

Case Material: Metal
Color: Gray



THE HEARTBEAT OF TODAY'S RVs
2021 Aeroplex Drive North · Elkhart, IN 46514
P- 877.294.8997 · F- 574.294.8698
wfcoelectronics.com

AD-BSC-0009-0 © 2016 WFCO Electronics Printed in USA 07/16

The RV
Industry's
Electrical
Authority

Our Power Pros provide expert
technical support for everything
the RV industry needs. Visit
wfcoelectronics.com/support.



EXPERT PRODUCT SUPPORT



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.