


Furion 15.5Kbtu

Incase this schematic is incomplete, inspect the capacitor (CP) terminal for more than one wire. If there are two, trace the non-compressor wire to the source. If it is a smaller capacitor, remove this wire from the system completely.

Disconnect compressor (R) white wire from capacitor (COM). Connect this wire directly to EasyStart brown. Connect EasyStart white to capacitor (COM). Connect EasyStart orange to capacitor (CP). Splice EasyStart black into compressor (O.L.) blue at a convenient location.

Perform 5 learning starts on shore power before a limited power source.

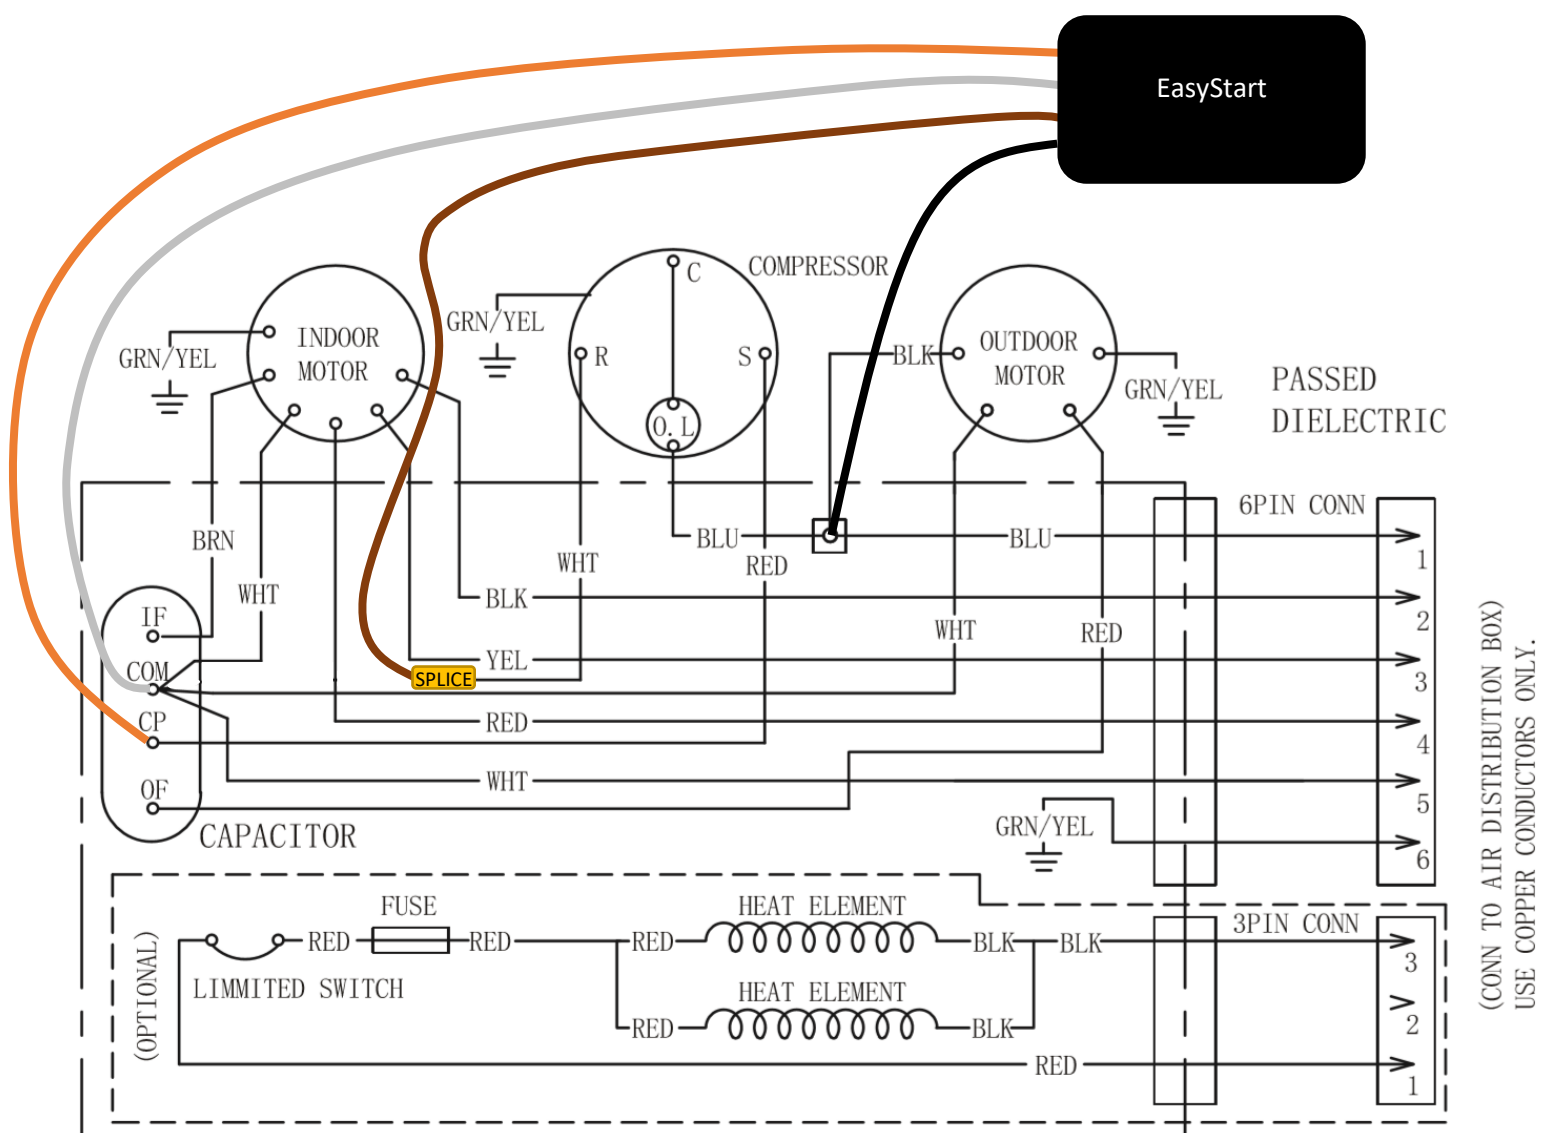



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.