


FURRION

8 inch Active Subwoofer

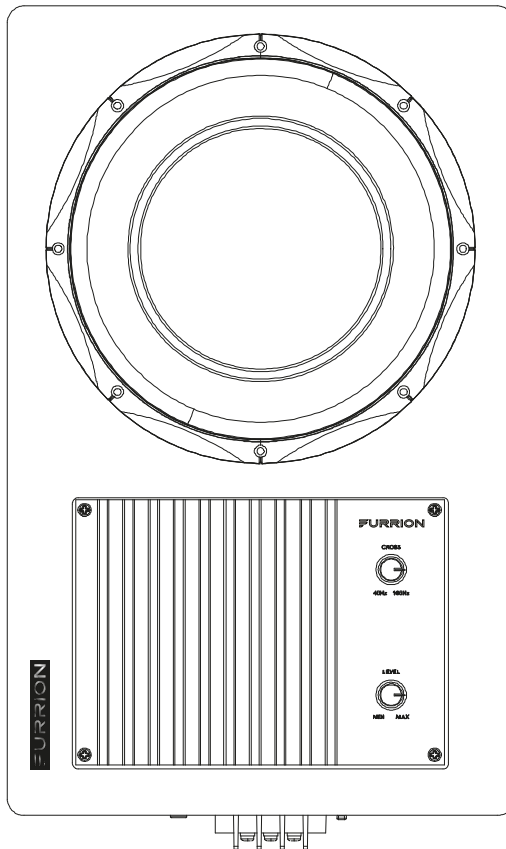

Model No: FSW8P12-CF

Welcome

Thank you and congratulations for purchasing this Furrion® speaker. Before placing your new appliance into operation, please read these operating instructions carefully. This instruction manual contains important information for safe use, installation and maintenance of the appliance.

Please keep this instruction manual in a safe place for future reference. This will ensure safe use and reduce the risk of injury. Pass it on to possible new owners of the appliance.

The manufacturer does not accept responsibility for any damages that may arise due to non-observation of these instructions.

If you have any further questions regarding our products, please contact us at support@furrion.com

Warranty

Congratulations on your purchase of a Furrion product. All Furrion products are made to stringent quality standards and if used properly for their intended purpose, you should enjoy many years of use from your purchase.

We are pleased to provide you with a 1 year warranty on all Furrion products.

Safety information

Ensure the +12V lead is disconnected from the battery before you connect any new equipment.

Ensure the mounting location will not interfere with the gas tank, brake lines or electrical wiring.

Ensure the Subwoofer is securely fastened to the vehicle to prevent damage in the event of an accident.

Ensure all wiring is protected to avoid pinching or crushing which could result in damage to the audio system.

Ensure the mounting location has sufficient air flow around the amplifier.

Ensure you use the recommended gauge wire/cable for all amplifier connections.


Improper installation may damage the subwoofer or the vehicle.

Specifications

Operating voltage	11 – 15V DV
Output power	120W (2ohm @ 1%THD)
Frequency response	40Hz – 160Hz
Signal to noise ratio	>90dB
Input sensitivity	80mV (1%THD)
Current consumption (max)	15A
Dimension	16-7/16 x 10 x 3-19/16 '' (418 x 254 x 92 mm)

Product Overview

Front Panel

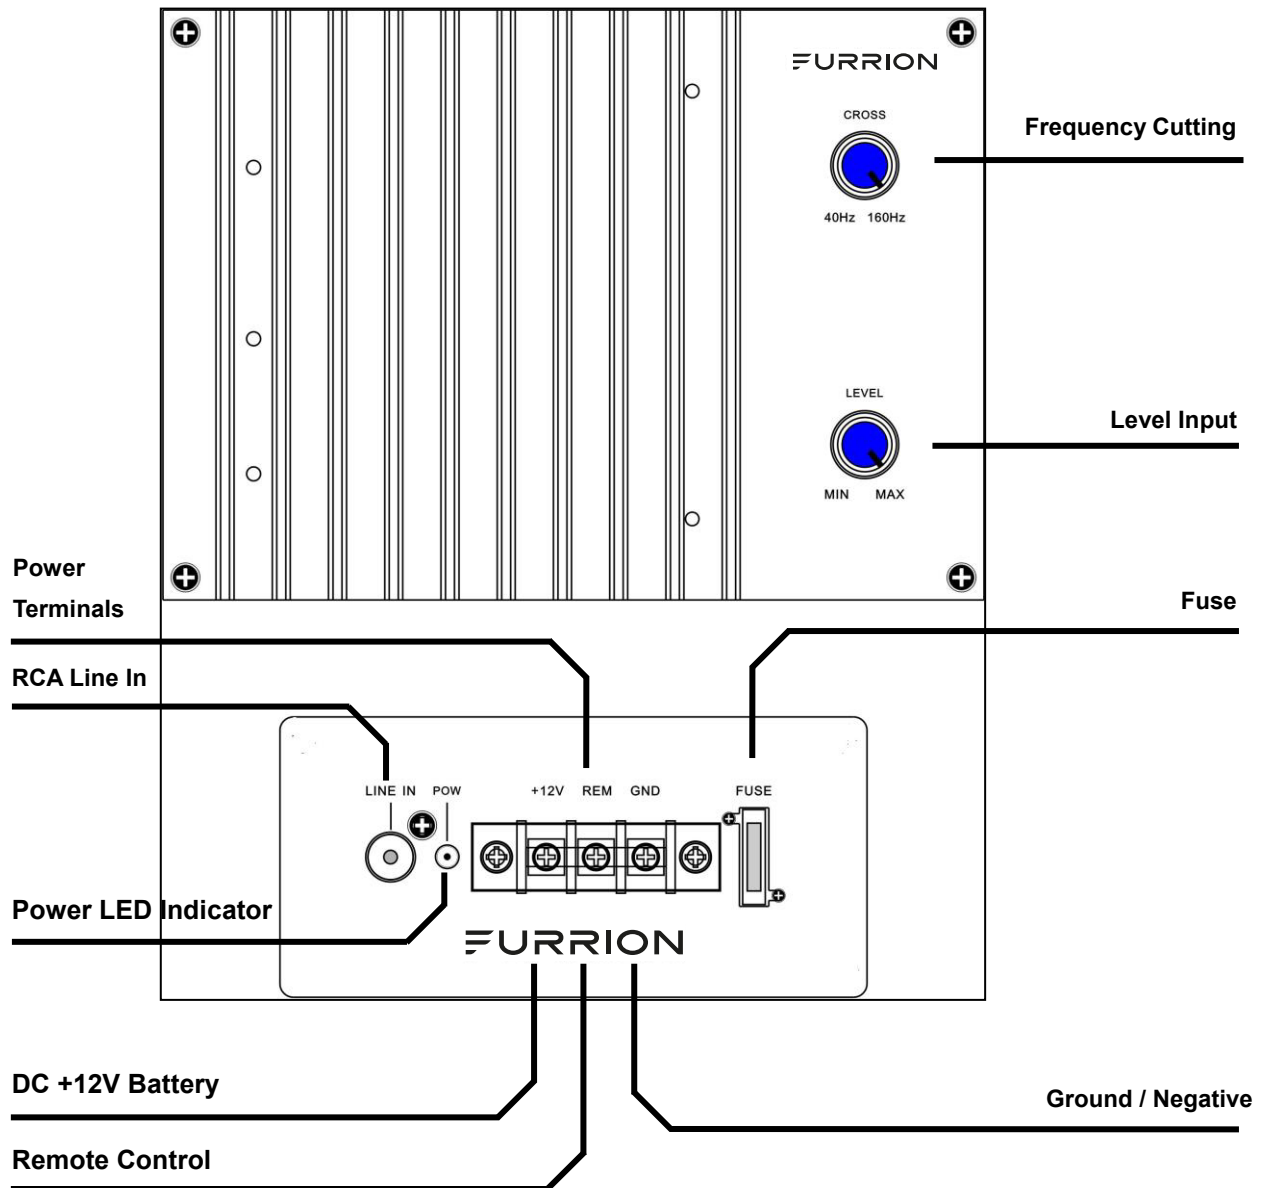

Installation

Wiring

Ensure the audio system is turned off before making any connections.

Connect the power wires to the terminal

Pay attention to respect cable polarity

All wires/connection must be insulated with electrical tape and fitted with protective connector shields wherever possible

Separate Audio and Power wiring to avoid interference.

Connect the signal input according to the selected input (see the picture below)



Level Control

We recommend the following method:

Turn "Frequency Cutting" and Level Input" levels to middle level.

Adjust the level control until the desired maximum volume is achieved without distortion.

Adjust the frequency cutting and the level input sensitivity. Place all the knobs in the center position, and adjust the frequency cutting to optimize vehicle acoustics.

Fuse

Turn off the subwoofer and disconnect all connections before replacing blown fuse.

Only use 15A fuse.

Product Care

Please remember that your Furrion product is an electronic device, and needs to be treated with care:

Do not subject it to mechanical shock or vibrations.

Do not subject it to excessive heat.

Keep it away from water and excessively humid areas.

Keep it away from high electromagnetic fields.

There are no user-serviceable parts inside. Opening the product or trying to repair it will terminate the warranty.



Furrion Innovation Center & Institute of Technology

- 52567 Independence Ct., Elkhart, IN 46514, USA • Toll free: 1-888-354-5792
- Email: info@furrion.com

©2007-2017 Furrion Ltd. Furrion and the Furrion logo are trademarks licensed for use by Furrion Ltd. and registered in the U.S. and other countries.

FURRION.COM



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.