

15 AMP WATER PUMP CONTROL

Intellitec's 15 Amp Water Pump Control is one of MONOPLEX family of devices. It offers many following benefits to water pump switching.

Minimizes the use of heavy gauge wire that runs through the coach. Only two 14 gauge wires needed to connect to the power source to the pump.


Multipoint switching can be added anywhere along the single MONOPLEX™ network, using simple wiring.

Simplified switches (momentary buttons) increase reliability.

Negligible standby current makes this system superior to conventional multipoint relay switching.

Labor and initial installation costs are reduced compared to conventional multipoint switching.

Potted assembly resists water damage.

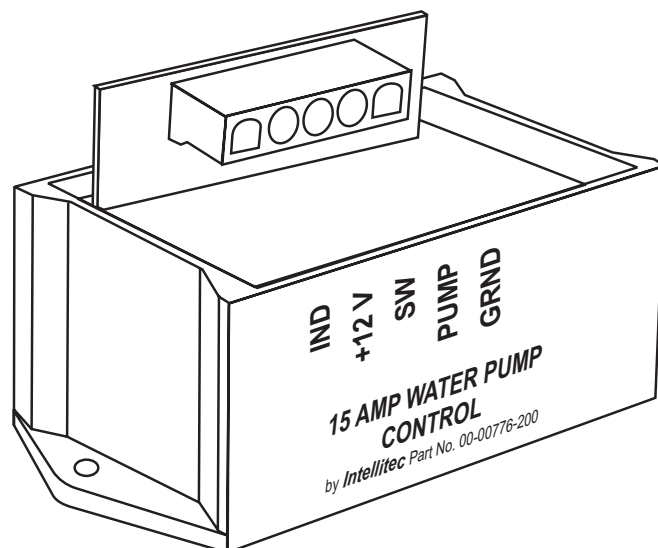

Part Number:00-00776-200

The **MONOPLEX™ 15 Amp Water Pump Control** is designed to operate as a “low side” remote switch in 12 volt DC systems. As its name implies, it was designed to control the domestic water pump. This unit will only work with loads greater than 5 amps but less than 15 amps.

The unit is packaged in a plastic enclosure suitable for mounting in a wet environment, such as near the water pump. It is capable of operating from multiple switch points (as many as desired) and up to 100 milliamps of power indicators. Power can be supplied either from a battery or a converter.



Intellitec


131 Eisenhower Lane North
Lombard, IL 60148
630.268.0010 / 1.800.251.2408
FAX 630.916.7890

15 AMP WATER PUMP CONTROL

Specifications:

Part Number:	00-00776-200
Operating Voltage:	10.0 - 16.0 VDC
Current Carry Capabilities:	15A Max
Standby Current draw:	2 milliamps
Operating temperature	-40 C to +85C (-40F to +185F)
Operating Environment:	Out of direct weather

Typical Wiring Diagram:

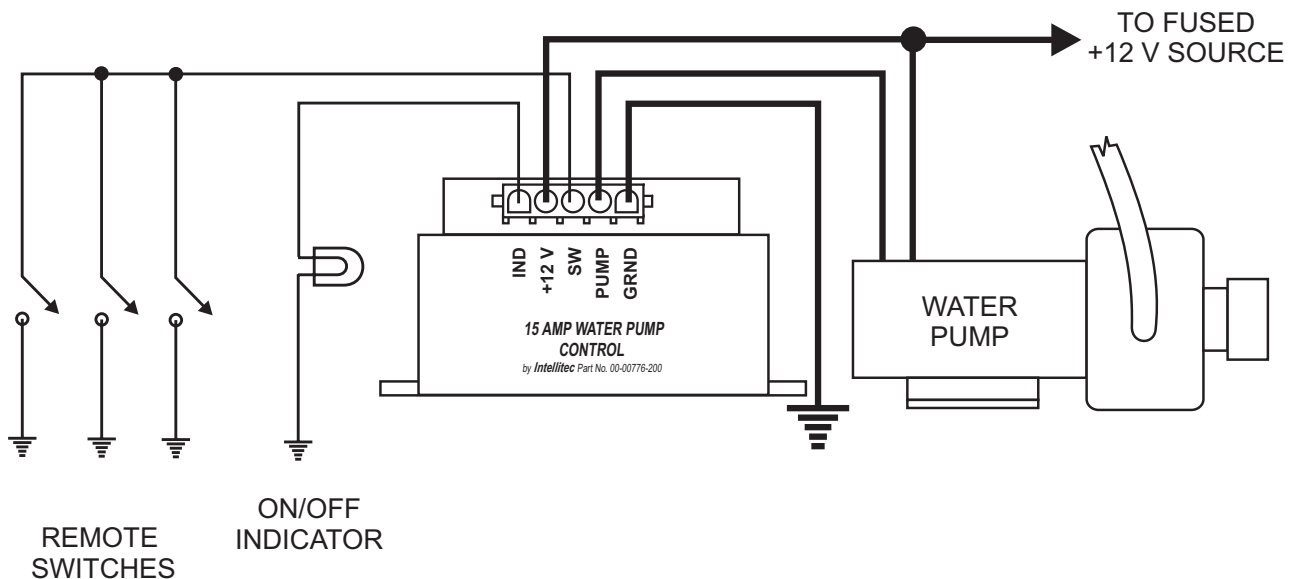

Intellitec

131 Eisenhower Lane North
Lombard, IL 60148
630.268.0010 / 1.800.251.2408
FAX 630.916.7890



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.