

5 - Minute Light Timer

Intellitec's 5-Minute Light Timer offers the RV owner a delayed light off function. When the owner activates the lighting circuit but forgets to turn it off, the Intellitec 5-Minute Light Timer will automatically turn off the circuit and prevent additional battery drainage.



Part Number 00-00256-000

The unit will handle up to 5 Amps of incandescent lamps. It is a two terminal controller that wires in series with the light. It can be wired either in the high side or lo side of the circuit.

Reverse Polarity protected

Connecting the timer incorrectly will not damage the unit, so long as the current drawn by the load remains within the 5 Amp rating.



Intellitec

1485 Jacobs Rd.
Deland, FL 32724
386.738.7307

P/N 53-00256-000 Rev. C 043020


5 - Minute Light Timer

Specifications:


Part Number :	00-00256-000
Operating Voltage:	9 to 30 VDC
Current carry capabilities:	5 Amps
Surge Rating	Up to 15 Amps for 1 second
Operating Ambient	-40° to +85° C

Wiring Diagram:


Housing Detail

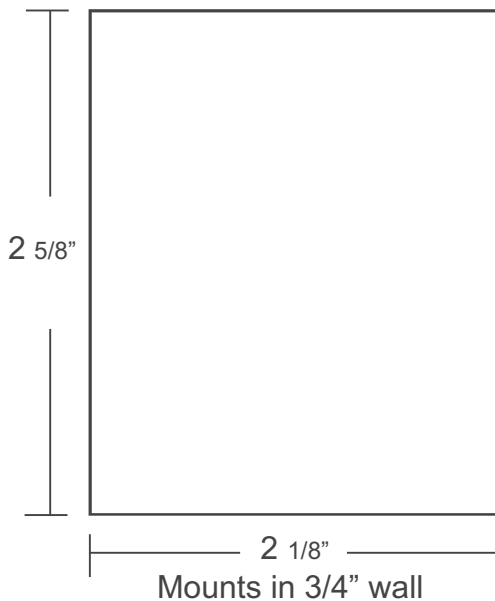

HIGH SIDE CONNECTION

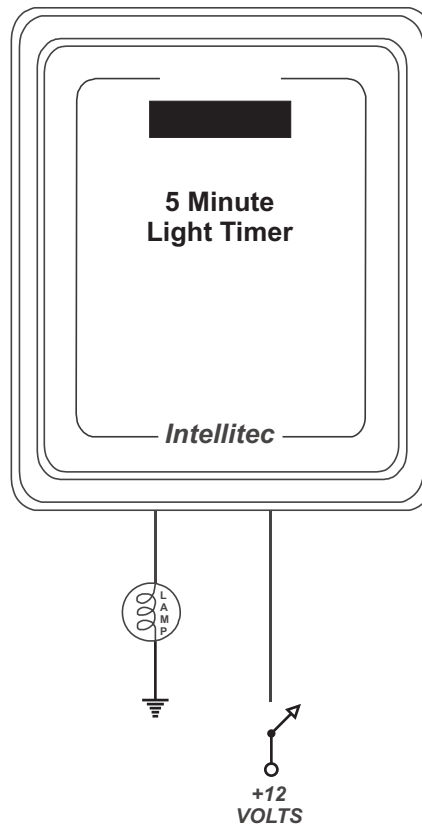

LOW SIDE CONNECTION

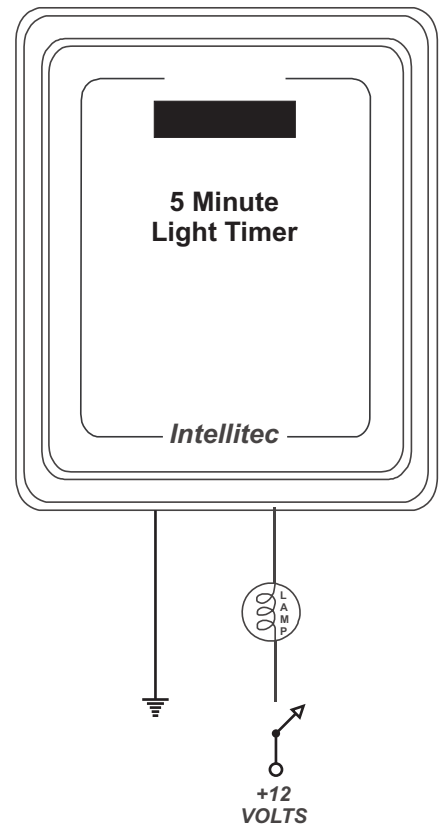

Intellitec

1485 Jacobs Rd.
Deland, FL 32724
386.738.7307

P/N 53-00256-000 Rev. C 043020



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.