


Remote Speaker Amp

Intellitec's Remote Speaker Amplifier overcomes the problem of insufficient sound coming from televisions used in the noisy environment of RV's and Van Conversions. It boosts the sound of television and drives a speaker mounted where everyone can enjoy it.

The unit mounts near the television set and plugs into the external speaker or earphone jack on the TV. Connections to an ignition switched +12 Volt supply, ground and two speaker wires are all it takes to install it. An 8 ohm speaker can be located in the vehicle where it will best distribute the sound. The volume control on the television still controls the sound level but the output is amplified up to 2.5 Watts.

The **Intellitec Remote Speaker Amplifier** presents a load of approximately 10 ohms to the speaker jack on the TV. This protects the output of the TV unlike certain other types of amplifiers.

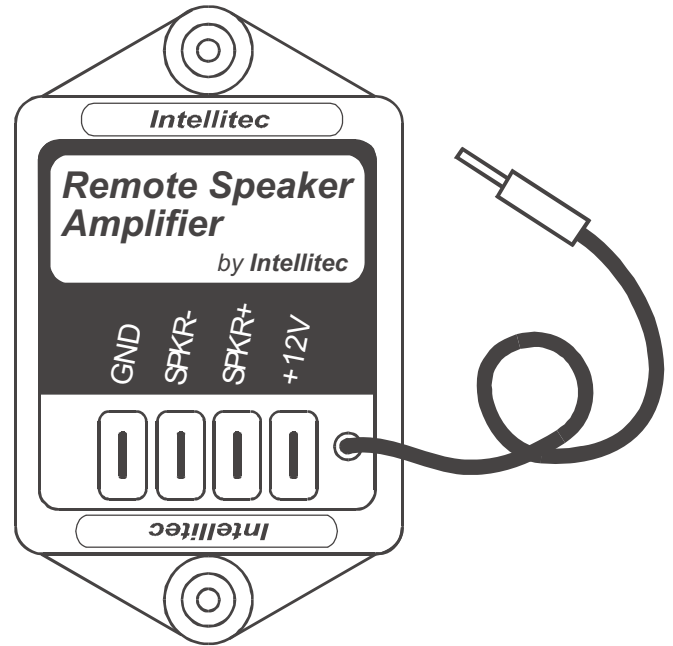

Actual Size

 **Intellitec**
1485 Jacobs Rd.
Deland, FL 32724
386.738.7307

P/N 53-00135-000 Rev. B 032119

Remote Speaker Amp

Specifications:

Part Number 00-00135-000


Operating voltage: 9 to 16 Volts DC

Audio output: 3 Watts max. into 8 ohms,
5 Watts max. into 4 ohms,
13.6 VDC supply

Frequency Response: 40-15000HZ

Distortion: Less than 1% at 2.5 Watt output power

Wiring Diagram:

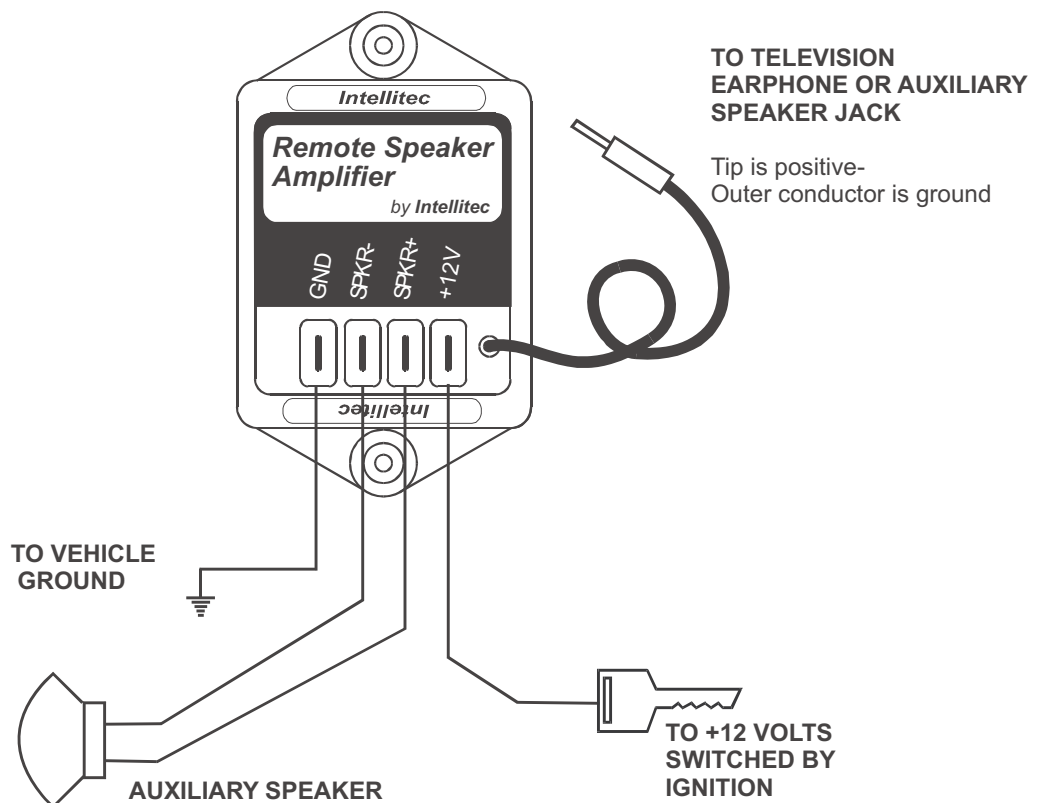

Intellitec

1485 Jacobs Rd.
Deland, FL 32724
386.738.7307

P/N 53-00135-000 Rev. B 032119



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.