


Water Pump Controller

Intellitec's Water Pump Controller, first in the family of MONOPLEX™ devices, offers the following benefits to water pump switching.

- Minimizes the use of heavy gauge wire that runs throughout the coach. Only two 14 gauge wires need to be run from the power source to the pump.
- Multipoint switching can be added anywhere along the network using simple wiring.
- Signaling from multiple points along the single wire MONOPLEX™ can be easily accomplished with inexpensive switches, providing momentary contact to ground.
- Simplified switches (momentary buttons) increase reliability.
- Negligible standby current makes this system superior to conventional multipoint relay switching.
- Labor and initial installation costs are reduced compared to multipoint switching using conventional switching.

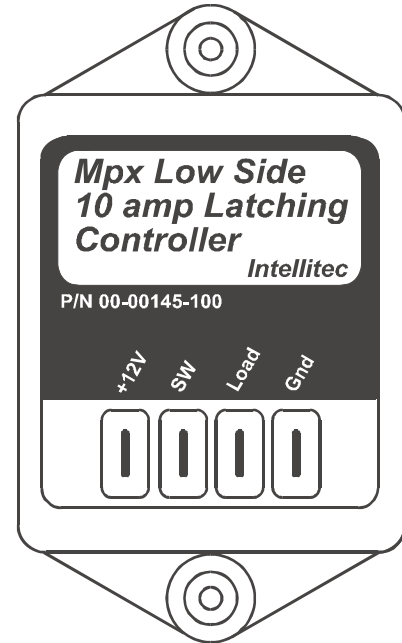

Water Pump Controller-10Amp
P/N 00-00145-100

The **MONOPLEX™ Water Pump Controller** is designed to operate as a "low side", remote switch in 12 volt DC systems. As it's name implies, it was designed to control the domestic water pump. It's use, however, is not limited to that. It can also be used to control a variety of other loads such as lighting, other pumps, fans, etc., when it is convenient to switch the ground side.

The unit is packaged in a plastic enclosure for mounting near the water pump with two flathead screws. It is capable of operating multiple switch points (as many as desired) and up to two LED power indicators may be utilized all on the same single wire. Power can be supplied from either the battery or converter.

 **Intellitec**
1485 Jacobs Rd.
Deland, FL 32724
386.738.7307

P/N 53-00145-100 Rev. B 032119

Water Pump Controller

Specifications:

Part Number: 00-00145-100


Operating voltage: 10.0 - 16.0 VDC

Current carry capabilities: 10A Max

Standby current draw: 2 milliamps

Operating temperature: -40°C to +85°C
(-40°F to +185°F)

Typical Wiring Diagram:

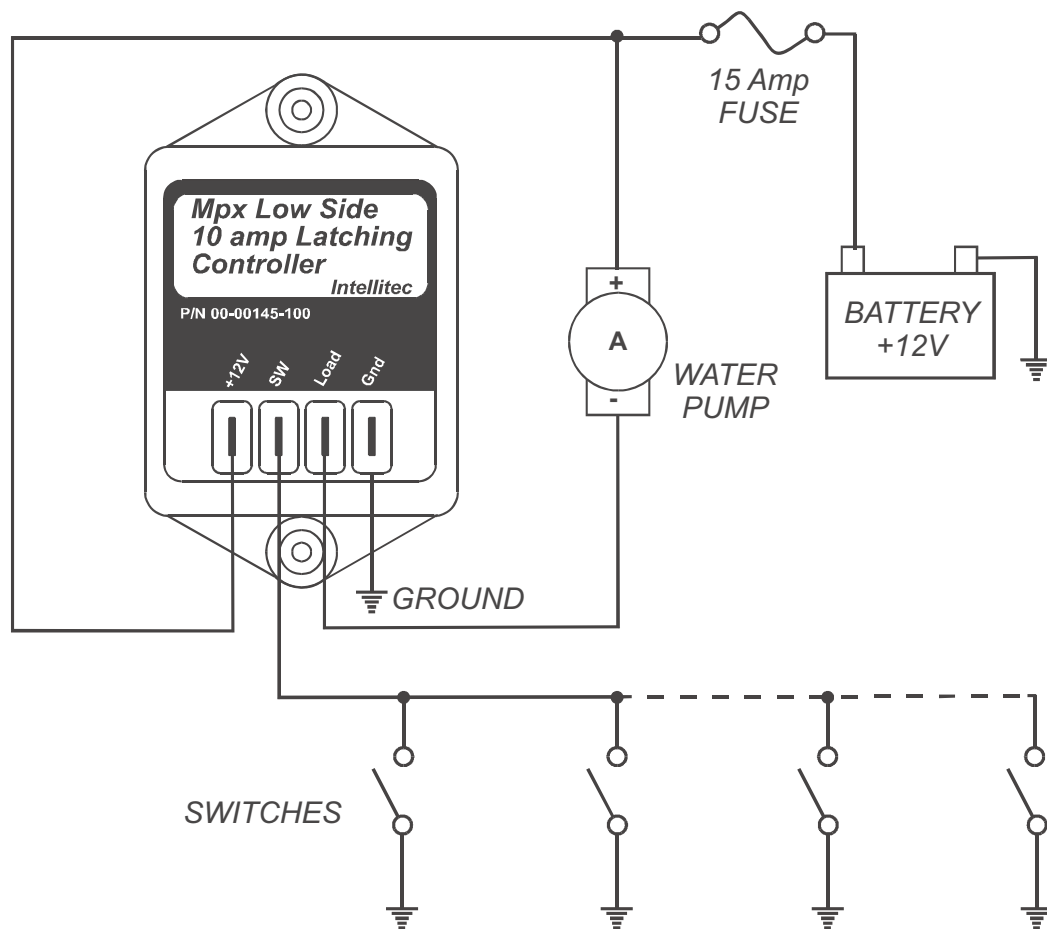

Intellitec

1485 Jacobs Rd.
Deland, FL 32724
386.738.7307

P/N 53-00145-100 Rev. B 032119



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.