



TIP SHEET

Testing vertical float switches or fluid sensors: 14-1136, 14-1137

This T.I.P Sheet is for testing vertical float switches: 14-1136, and 14-1137 with internal 1K, .25 watt resistor.

Step 1: Set multi-meter to kilo-ohms' setting for your particular meter.



Step 2: Connect multi-meter to float switch wires and actuate the float on the switch.

Step 3: The switch should open and close creating a change in resistance.

Step 4: When the switch is in the closed position you should see approximately 1,000 ohms (plus or minus 10%) of resistance on the float switch. When in the open position, it should read zero resistance, or open.

Step 5: If the float switch fails open, fails closed, or is intermittent, note that on the return tag for the warranty department, or replace float switch if not under warranty.




© Copyright Power Gear December, 2011

TIP Sheet #82-L0510, Rev. 0A


If the float switch is cracked, or the wires are pulled out, cut, or modified, warranty claim will be denied. Use a multi-meter to check resistance. The float switch completes the circuit to turn the "Jacks Down" LED on the touchpad "On" or "Off" depending on the state of the float.

****Note the type of connectors used on the different float switches****

Part #14-1136: Float with Trailer connector

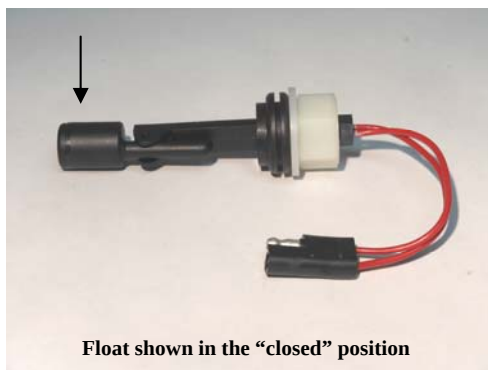


Float shown in the "closed" position

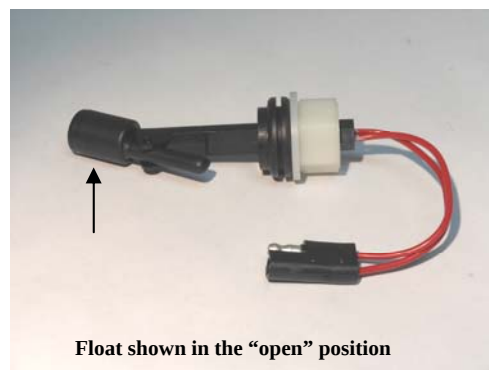


Float shown in the "open" position

Part #14-1137: Float with Packard connector

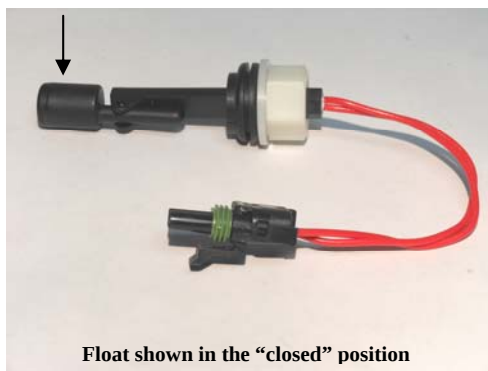

Float shown in the "closed" position

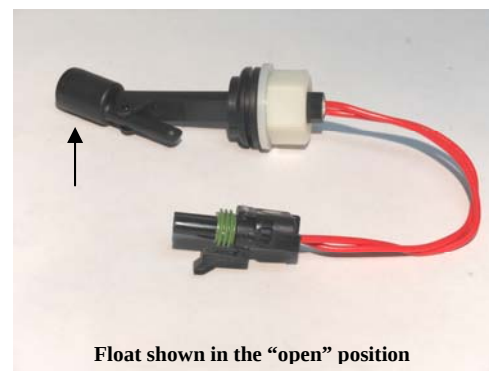

Float shown in the "open" position

NOTE: Refer to www.lci1.com for Tip Sheet #81, or document #81-1298, for directions to replace these float switches.



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.