


Power Confirmation

CONFIRM CONTROLLER IS RECEIVING POWER FROM THE BOAT

Ground – green wire	Positive – orange & red wires
------------------------	----------------------------------

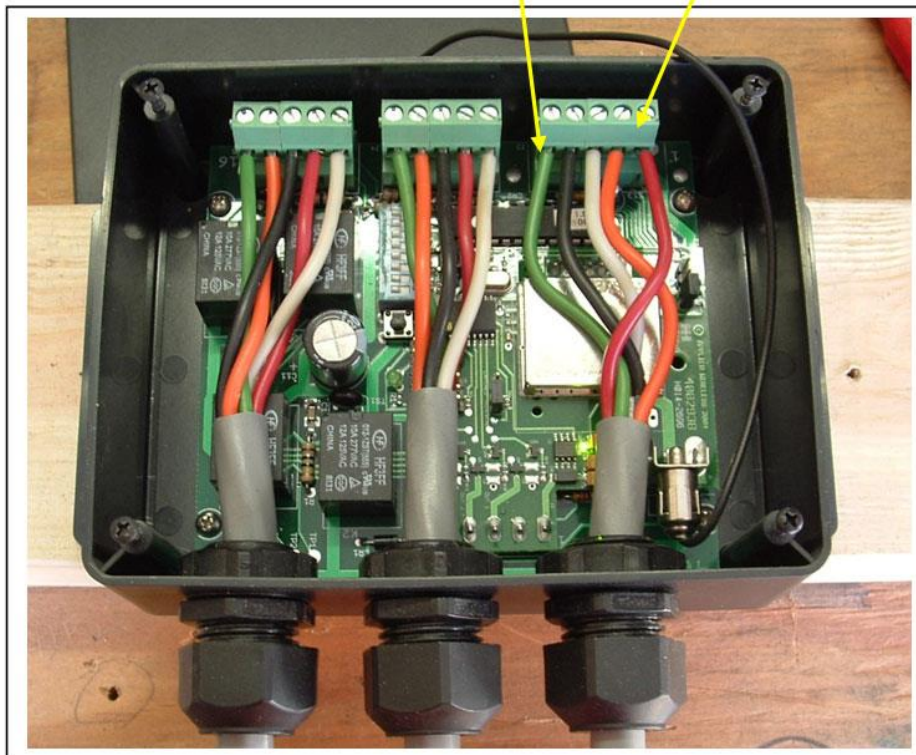

1. Putting the voltage meter black lead on the Ground (**green wire**) and the voltage meter red lead on the 5amp incoming power wire for the controller circuit board (**orange wire**), it should read 12v.
2. Putting the voltage meter black lead on the Ground (**green wire**) and the voltage meter red lead the 15amp incoming power for the actuator (**red wire**) should read 12v.

If the controller is receiving 12v of power and the shade is not moving, confirm that voltage is not dropping by checking the voltage coming into the controller while trying to operate the shade. **NOTE** – 2 people are needed – one to test voltage and the other to operate the shade.

If the voltage drops then the system is not receiving sufficient power from the boat's power supply. Confirm that either the batteries are charged, or that the boat is connected to shore power. If the voltage continues to drop, there may be an issue with the boat's wiring connections.

For further assistance, contact SureShade at 877-333-8323.



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.