



CCF LIGHTS GENERAL INFORMATION

6 INCH ROUND RECESSED CCF LIGHTS

-PLEASE READ ALL INFORMATION CAREFULLY-

INSPECTION:

This CCF Light was inspected and tested by the manufacturer. Damage in shipment should be reported to the delivering carrier immediately, followed by a claim request.

MATERIALS PROVIDED:

This luminaire is packed with the appropriate colored bezel. Mounting hardware is NOT REQUIRED. Spring tabs on either side of bezel secure luminaire in a 5.31 inch diameter opening. See *Mounting Instruction Sheet* for details.

ELECTRICAL RATINGS:

Model	CCF Lamp Type	Operating Voltage	Input Current
12VDC	Round	12V DC Nominal	0.65A
24VDC	Round	24V DC Nominal	0.45A

Each CCF Light is supplied with three #16AWG wire leads:

Red or Orange = Power ⊕

Black: Power Return ⊖

Blue = External Control, either:

- Connected together with ⊕ Positive (Red or Orange Lead)
OR
- If used, an external on/off switch circuit
OR
- If used, connects to a proprietary Taylorbrite® external dimmer*

***Note: ONLY a proprietary Taylorbrite® external dimmer can be used with Taylorbrite® CCF Lights**

Connectors are not included. Wire splices will require the ability to crimp two wires onto a third. The recommended connectors are Hollingsworth #B4051 (16-14 Oval Butt Slice) or equivalent.

The recommended hand held crimp tool specified is a Hollingsworth #H7B. An acceptable alternate is an Ideal Industries #83-001.


ENVIRONMENTAL:

Note: CCF Lights may require several minutes of warm-up to reach full brightness

Intended for use on interior/covered surfaces.

Not submersible.

BACK VIEW OF
ROUND CCF LIGHT

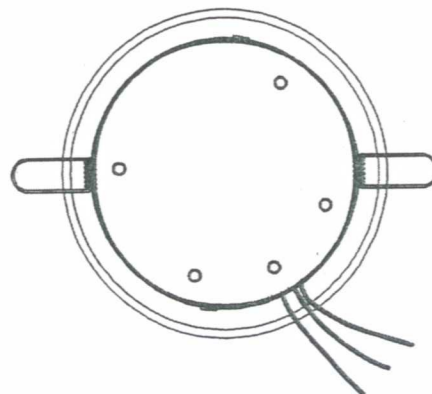



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.