

WF-8950L2-MBA

Replacement for 35/45/55/65/75 Amp Power Centers





THE HEARTBEAT OF TODAY'S RVs

Model WF-8950L2-MBA

Output: 50 Amps DC

Input: 105-130 VAC,
60 Hz, 940W

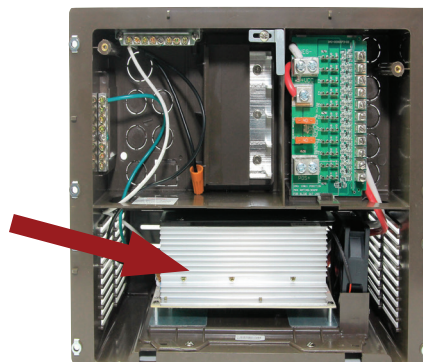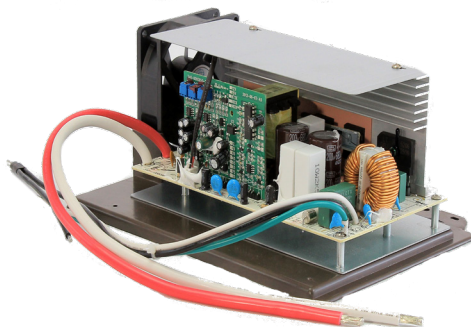

Easy Installation for Lithium-Ion Upgrades

With 40 years of power equipment experience, WFCO knows what is important to our customers. High on the list is easy, fast installation. Our WF-8950L2-MBA is a quick, easy replacement part for all WF-8900 Series power centers. It installs easily with only two screws, three AC wires, and two DC wires. With no need to re-wire, installation is only 10 minutes!

The WFCO WF-8950L2-MBA is an RV power converter replacement main board, optimized to safely charge deep-cycle lithium iron phosphate batteries, while powering the RV's lights and appliances. The multi-stage process ensures a safe operating voltage for all loads, replaces energy back into the lithium-ion battery, and assures the lithium cells inside the batteries remain balanced.



PRODUCT FEATURES

SPECIFICATIONS	WF-8950L2-MBA
Power Input	940W
Input Voltage	105 VAC - 130 VAC / 60 Hz
Output Current	50A
Converter Type	2 Stage Converter Charger
Voltage Output	13.6 - 14.6 VDC
Normal mode	13.6 VDC
Bulk charge mode	14.6 VDC
Outer Dimensions	7 1/16"W x 3 7/8"H x 9 1/2"D
Weight	5 lbs.



WFCO Electronics is the leader in manufacturing, distribution, and servicing of power conversion products in the RV industry, preferred more than 4-to-1 by RV manufacturers.

Certifications: UL[®] and cUL[®] listed and FCC Class B compliant. Specifications are subject to change without notice or obligation.

Standard Safety Features/Protections: Over Current, Over Temperature, Over Voltage, Reverse Polarity



THE HEARTBEAT OF TODAY'S RVs

2021 Aeroplex Drive North · Elkhart, IN 46514

P- 877.294.8997 · F- 574.294.8698

wfcoelectronics.com

AD-BSC-0014-0 © 2016 WFCO Electronics Printed in USA 07/16

The RV
Industry's
Electrical
Authority

Our Power Pros provide expert technical support for everything the RV industry needs. Visit wfcoelectronics.com/support.





This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.