


COAST EXCLUSIVE BRANDS: COLEMAN®-MACH®

Coleman-Mach

RV Products Air Conditioners and Heat Pumps



Coleman-Mach RV air conditioners have been made in Wichita, Kansas, for over 45 years, with nearly five million units produced during that time. A commitment to quality, outstanding selection of products and a warranty you can rely on—Coleman-Mach is the name in RV air conditioners that you can trust. Every time.

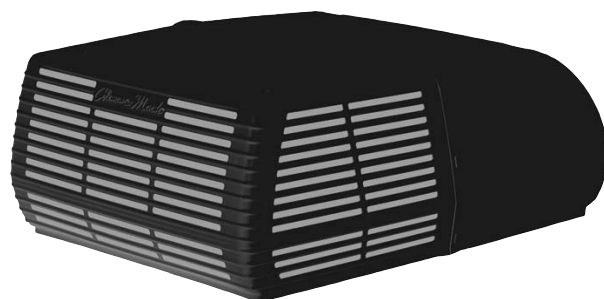

9000 SERIES CEILING ASSEMBLY ("Air Distribution Box (ADB)")

Order with most Coleman-Mach air conditioner upper units. The **61365** model is heat-ready; you can add an optional heat kit. Control knobs mounted on end for best visibility and ease of operation. Designed with a special contour to fit snugly against convex vehicle ceilings. Only two inches thick and weighs just over 6 pounds. Filter replacement is convenient and easy to perform.



POPULAR OPTION: SOLAR-PAL™ RV BATTERY REPLENISHER

ENERGIZED!

Prevents expensive auxiliary battery replacement. Converts solar energy into a continuously feeding source of fresh charge for your battery. Attaches easily to any full-sized Coleman-Mach® RV air conditioner. Reduces freeze damage. Self-regulating to prevent overcharging.



60403 Solar Pal Charger #7330A4101 1

GREAT SELECTION—Coleman-Mach rooftop RV air conditioners come in many styles to suit any use. Choose between the low-profile Polar Series and the traditional sized units, choose Black or Arctic White shrouds for most models, or for versatility look into a heat pump model. Going off-road? Coleman-Mach has the Roughneck model for you.

Heat and Cool

HEAT KIT—You can add an electric heat kit to any heat-ready Coleman-Mach air conditioner. The heat kit provides 5,600 BTU heating output to take away that morning chill without running your furnace.



CONDENSOR PUMP—Many Coleman-Mach air conditioner models come with a condensor pump that makes sure any water generated by the air conditioner's condensor will be whisked away instead of pooling on your rooftop.

COAST EXCLUSIVE BRANDS: COLEMAN®-MACH®

Coleman-Mach



RV Products Air Conditioners:

Coleman®-Mach® 480X4 AND 480X8 SERIES HEAT PUMP

MACH 15 HP2™ HIGH PERFORMANCE AND MACH POWER SAVER HEAT PUMP

Now charged with (ECO-Friendly) R-410A. Air conditions your RV with a whopping 15,000 nominal BTUH cooling capacity. Economically heats your RV also, with 12,700 BTUHs of available heat. A back-up electric heat strip provides additional heat for those extra chilly mornings. HP2 provides electric heat to use in moderate temperatures; lets you save your LP gas furnace for the really cold conditions. Copper tubing is rifled inside to create turbulence in the coolant, enhancing the system's ability to dissipate heat.



SPECIFICATIONS	HP2™ Heat Pump 480X4	MACH POWER SAVER HEAT PUMP
Cooling Capacity (Nominal BTUH)	15,000	13,500
Locked Rotor Cooling Amps	63.0	58.4
Running Watts/Cooling (1)	1,640	1,200
Running Watts/Cooling (2)	1,960	1,450
Running Watts/Heating (3)	1,800	1,750
Electrical Rating	115V 60HZ 1 Phase	
Delivered BTU Heating Output*	5,600	
Approximate Full-Load Amps: Cooling Heating	15.5	10.8
	15.4*	15.6*
Evaporator Air Delivery CFM	320 CFM-High Speed	
Unit Weight (lbs)**	89.0	
Dimensions (Exterior Shroud)	13.8" H x 26.1" W x 38" L	
* Optional Heater Assembly. **Installed weight will vary with Ceiling Package option. (1) Cooling A.R.I. Standard Conditioning 80° F. DB/67° F. WB Indoor, 95° F. DB Outdoor at 115VAC. (2) Cooling A.R.I. Standard Conditioning 95° F. DB/71° F. WB Indoor, 115° F. DB Outdoor at 103.5VAC. (3) 47° F. Outdoor Temperature (Optional Heat Strip Only).		

HEAT PUMP AIR CONDITIONER COMPONENTS

Order #	Mfr. #	Description
STEP 1: Choose one Upper Unit, required for all configurations		
63150	#48004-876	Upper Unit Only, Mach 15 Heat Pump, Arctic White ◆
61369	#48004-879	NEW! Upper Unit Only, Mach 15 Heat Pump, Black ◆
61743	#48058-876	NEW! Upper Unit Only, 13.5 Power Saver Heat Pump, Arctic White ◆
61386	#48058-879	NEW! Upper Unit Only, Power Saver Heat Pump, Black ◆
61384	#48068-879	NEW! Upper Unit Only, Power Saver Heat Pump Solar, Black ◆
STEP 2: One Air Distribution Box (ADB) required for NON-DUCTED ceiling configurations only		
61350	#9530G715	NEW! Heat-Ready Ceiling Assembly, Free Delivery, White
OR—STEP 2: Both required for LATERAL DUCTED configurations only		
61351	#8530D735	NEW! Heat Ready Ceiling Assembly, Lateral Ducted, White
65659	#8530A3451	Thermostat for Heat Pump (Refer to page 16 for more details)
STEP 3: Options for HP2 Heat Pump Air Conditioner		
67306	#9233A4551	Electric Heat Kit for Heat-Ready Ceiling Assemblies (Not for Mach 8)
60775	#8330B6301	Chillgrille Plenum, no control package, to duct supply air towards the front and rear of coach (See page 15)
60403	#7330A4101	Solar Pal Charger, 5 Watts (See page 1)
66567	#6703-3302	Replacement Filter for Non-Ducted 7330/8330 Series
60962	#6798A3761	Replacement Filter for Ducted Models
65490	#6798-3751	Replacement Filter, 16" x 16" (Ducted Ceiling used on most Fleetwood Units)

COAST EXCLUSIVE BRANDS: COLEMAN®-MACH®

Coleman-Mach®



Coleman®-Mach® 48203A8765 SERIES ROUGHNECK

ROUGHNECK — IT'S TOUGH!

Now charged with (ECO-Friendly) R-410A. Takes you where no road has gone before. Specially equipped to handle the jarring and vibrations that come with the territory, whether you're in construction, the oil field, or just taking the back roads to your favorite fishing hole. Tough enough to beat the heat, too, with a 13,500 BTUH nominal cooling capacity.



SPECIFICATIONS	ROUGHNECK 48203A8765
Cooling Capacity (Nominal BTUH)	13,500
Locked Rotor Cooling Amps	63.0
Running Watts/Cooling (1)	1,650
Running Watts/Cooling (2)	1,900
Running Watts/Heating (3)	1,800
Electrical Rating	115V 60HZ 1 Phase
Delivered BTU Heating Output*	5,600
Approximate Full-Load Amps:	
Cooling	15.3
Heating	16.0*
Evaporator Air Delivery CFM	320 CFM-High Speed
Unit Weight (lbs)**	85.5
Dimensions (Exterior Shroud)	13.8" H x 26.1" W x 38" L
* Optional Heater Assembly. ** Installed weight will vary with Ceiling Package option. (1) Cooling A.R.I. Standard Conditioning 80° F. DB/67° F. WB Indoor, 95° F. DB Outdoor at 115VAC. (2) Cooling A.R.I. Standard Conditioning 95° F. DB/71° F. WB Indoor, 115° F. DB Outdoor at 103.5VAC. (3) 47° F. Outdoor Temperature.	

ROUGHNECK AIR CONDITIONER COMPONENTS

Order #	Mfr. #	Description
STEP 1: Choose one Upper Unit, required for all configurations		
63146	#48203B9665	Heavy Duty Upper Unit Only, Arctic White ◆
STEP 2: One Air Distribution Box (ADB) required for NON-DUCTED ceiling configurations only		
61365	#9330F715	NEW! Cool/Heat-Ready Ceiling Assembly, Free Delivery, White
OR—STEP 2: One Air Distribution Box (ADB) for LATERAL DUCTED configurations only		
63130	#8330A733	Cool-Only Ceiling Assembly, Lateral Ducted, without Thermostat, White
61360	#8330D735	NEW! Heat Ready Ceiling Assembly, Lateral Ducted, without Thermostat, White
61357	#7330F3361	Thermostat, Analog, Cool-Only, 12 Volt Wall-Mount, White (Refer to page 16 for more details)
60277	#7330G3351	Thermostat, Analog, Heat/Cool, 12 Volt Wall-Mount, White (Refer to page 16 for more details)
64444	#8330-763	MCD (Manual Control Ducted) ADB, Cool-Only, White (no thermostat required)
OR—STEP 2: One Air Distribution Box (ADB) for DUCTED PARK MODELS only		
63126	#8330A743	Cool Only ADB, 24-V, w/o Thermostat
64680	#7330B3441	Thermostat, Standard 24-V
STEP 3: Options for Roughneck Air Conditioner		
67306	#9233A4551	Electric Heat Kit for Heat-Ready Ceiling Assemblies (Not for Mach 8)
60775	#8330B6301	Chillgrille Plenum, no control package, to duct supply air towards the front and rear of coach (See page 15)
60403	#7330A4101	Solar Pal Charger, 5 Watts (See page 1)
66567	#6703-3302	Replacement Filter for Non-Ducted 7330/8330 Series
60962	#6798A3761	Replacement Filter for Ducted Models
65490	#6798-3751	Replacement Filter, 16" x 16" (Ducted Ceiling used on most Fleetwood Units)

COAST EXCLUSIVE BRANDS: COLEMAN®-MACH®



Coleman®-Mach®

Coleman®-Mach® 48204 SERIES

MACH 15™ RV AIR CONDITIONER

DELIVERS THE HIGHEST AIRFLOW RATE AVAILABLE.

Now charged with (eco-friendly) R-410A. No matter what you're driving, we've got your air conditioner. Want to take cooling power to the max? The Mach 15™ is the world's most powerful RV air conditioner with the highest cooling output you can buy. With an airflow so strong, it's a sure bet for ducted systems. The Mach 15™ is equipped with a 1/3 hp fan motor, the largest used in an RV A/C, delivering cool air at an incredible 320 CFM (cubic feet per minute). And the Mach 15™ features the same streamlined shape that enhances the airflow and cooling efficiency of every model in the line of Coleman®-Mach® RV air conditioners. All-copper tubing & gas-flux brazed joints ensure long life product dependability. Large evaporator & condenser coils with raised lance fins enhance the system's ability to dissipate heat. A/C shroud includes condenser coil protection. Optional heater assembly can be added to provide 5,600 BTUH of heat.



SPECIFICATIONS	MACH 15 48204
Cooling Capacity (Nominal BTUH)	15,000
Locked Rotor Cooling Amps	63.0
Running Watts/Cooling (1)	1,650
Running Watts/Cooling (2)	1,900
Running Watts/Heating (3)	1,800
Electrical Rating	115V 60HZ 1 Phase
Delivered BTU Heating Output*	5,600
Approximate Full-Load Amps:	
Cooling	15.3
Heating	16.0*
Evaporator Air Delivery CFM	320 CFM-High Speed
Unit Weight (lbs)**	79.5
Dimensions (Exterior Shroud)	13.8" H x 26.1" W x 38" L

* Optional Heater Assembly. ** Installed weight will vary with Ceiling Package option. (1) Cooling A.R.I. Standard Conditioning 80° F. DB/67° F. WB Indoor, 95° F. DB Outdoor at 115VAC. (2) Cooling A.R.I. Standard Conditioning 95° F. DB/71° F. WB Indoor, 115° F. DB Outdoor at 103.5VAC. (3) 47° F. Outdoor Temperature.

MACH 15 AIR CONDITIONER COMPONENTS

Order #	Mfr. #	Description
STEP 1: Choose one Upper Unit, required for all configurations		
63140	#48204C966	Upper Unit Only, Arctic White
61372	#48254C969	NEW! Upper Unit Only, Black
STEP 2: One Air Distribution Box (ADB) required for NON-DUCTED ceiling configurations only		
61365	#9330F715	NEW! Cool/Heat-Ready, Free Delivery Ceiling Assembly, White
OR—STEP 2: for NON-DUCTED ceiling configuration with wall thermostat (plenum + thermostat + either control package required)		
61362	#9330F4552	NEW! Free Delivery Plenum for Wall Thermostat, White
61357	#7330F3361	Thermostat, Analog, Cool-Only, 12 Volt Wall-Mount, White (Refer to page 16 for more details)
60277	#7330G3351	Thermostat, Analog, Heat/Cool, 12 Volt Wall-Mount, White (Refer to page 16 for more details)
65346	#8330-752	Cool-Only Control Package
61359	#9330C755	NEW! Heat-Ready AC Control Kit
OR—STEP 2: One Air Distribution Box (ADB) for LATERAL DUCTED configurations only		
63130	#8330A733	Cool-Only Ceiling Assembly, Lateral Ducted, without Thermostat, White
61360	#8330D735	NEW! Heat Ready Ceiling Assembly, Lateral Ducted, without Thermostat, White
61357	#7330F3361	Thermostat, Analog, Cool-Only, 12 Volt Wall-Mount, White (Refer to page 16 for more details)
60277	#7330G3351	Thermostat, Analog, Heat/Cool, 12 Volt Wall-Mount, White (Refer to page 16 for more details)
64444	#8330-763	MCD (Manual Control Ducted) ADB, Cool-Only, White (no thermostat required)
61359	#9330C755	NEW! Heat-Ready AC Control Kit
OR—STEP 2: One Air Distribution Box (ADB) for DUCTED PARK MODELS only		
63126	#8330A743	Cool Only ADB, 24-V, w/o Thermostat
64680	#7330B3441	Thermostat, Standard 24-V
STEP 3: Options for Mach 15 Air Conditioner		
67306	#9233A4551	Electric Heat Kit for Heat-Ready Ceiling Assemblies (Not for Mach 8)
65348	#9330B6151	Add-On Heat Strip for Non-Ducted Cool only 9330X713 Series
60775	#8330B6301	Chillgrille Plenum, no control package, to duct supply air towards the front and rear of coach (See page 15)
60403	#7330A4101	Solar Pal Charger, 5 Watts (See page 1)
66567	#6703-3302	Replacement Filter for Non-Ducted 7330/8330 Series
65354	#9330-3151	Replacement Filter for Non-Ducted 9330Series
60962	#6798A3761	Replacement Filter for Ducted Models
65490	#6798-3751	Replacement Filter, 16" x 16" (Ducted Ceiling used on most Fleetwood Units)

COAST EXCLUSIVE BRANDS: COLEMAN®-MACH®



Coleman-Mach

Coleman®-Mach® 48203 SERIES

MACH 3 PLUS RV AIR CONDITIONER

Now charged with (eco-friendly) R-410A. America's over-the-road bestseller. As the second most powerful air conditioner in the Coleman-Mach line, the Mach 3 PLUS™ is one of the best RV air conditioning values available. The Mach 3 PLUS™ features a large evaporator and condenser coils with raised lance fins to help dissipate heat. 13,500 nominal BTUH cooling capacity; delivers 320 CFM (cubic feet per minute) airflow. Add the optional Heater Assembly and you'll have 5,600 BTUHs of heat for cooler outings. You can count on the Mach 3 PLUS™ for reliability too. All-copper tubing and gas-flux brazed joints ensure durability and long life for your RV air conditioner. A/C shroud includes condenser coil protection.



SPECIFICATIONS	MACH 3+ 48203
Cooling Capacity (Nominal BTUH)	13,500
Locked Rotor Cooling Amps	63.0
Running Watts/Cooling (1)	1,650
Running Watts/Cooling (2)	1,900
Running Watts/Heating (3)	1,800
Electrical Rating	115V 60HZ 1 Phase
Delivered BTU Heating Output*	5,600
Approximate Full-Load Amps:	
Cooling	15.3
Heating	16.0*
Evaporator Air Delivery CFM	320 CFM-High Speed
Unit Weight (lbs)**	79.5
Dimensions (Exterior Shroud)	13.8" H x 26.1" W x 38" L

* Optional Heater Assembly. ** Installed weight will vary with Ceiling Package option. (1) Cooling A.R.I. Standard Conditioning 80° F. DB/67° F. WB Indoor, 95° F. DB Outdoor at 115VAC. (2) Cooling A.R.I. Standard Conditioning 95° F. DB/71° F. WB Indoor, 115° F. DB Outdoor at 103.5VAC. (3) 47° F. Outdoor Temperature.

MACH 3+ AIR CONDITIONER COMPONENTS

Order #	Mfr. #	Description
STEP 1: Choose one Upper Unit, required for all configurations		
63134	#48203C966	Upper Unit Only, Arctic White
61370	#48203A879	NEW! Upper Unit Only, Black
STEP 2: One Air Distribution Box (ADB) required for NON-DUCTED ceiling configurations only		
61365	#9330F715	NEW! Cool/Heat-Ready, Free Delivery Ceiling Assembly, White
OR—STEP 2: for NON-DUCTED ceiling configuration with wall thermostat (plenum + thermostat + either control package required)		
61362	#9330F4552	NEW! Free Delivery Plenum for Wall Thermostat, White
61357	#7330F3361	Thermostat, Analog, Cool-Only, 12 Volt Wall-Mount, White (Refer to page 16 for more details)
60277	#7330G3351	Thermostat, Analog, Heat/Cool, 12 Volt Wall-Mount, White (Refer to page 16 for more details)
65346	#8330-752	Cool-Only Control Package
61359	#9330C755	NEW! Heat-Ready AC Control Kit
OR—STEP 2: One Air Distribution Box (ADB) for LATERAL DUCTED configurations only		
63130	#8330A733	Cool-Only Ceiling Assembly, Lateral Ducted, without Thermostat, White
61360	#8330D735	NEW! Heat Ready Ceiling Assembly, Lateral Ducted, without Thermostat, White
61357	#7330F3361	Thermostat, Analog, Cool-Only, 12 Volt Wall-Mount, White (Refer to page 16 for more details)
60277	#7330G3351	Thermostat, Analog, Heat/Cool, 12 Volt Wall-Mount, White (Refer to page 16 for more details)
64444	#8330-763	MCD (Manual Control Ducted) ADB, Cool-Only, White (no thermostat required)
61359	#9330C755	NEW! Heat-Ready AC Control Kit
OR—STEP 2: One Air Distribution Box (ADB) for DUCTED PARK MODELS only		
63126	#8330A743	Cool Only ADB, 24-V, w/o Thermostat
64680	#7330B3441	Thermostat, Standard 24-V
STEP 3: Options for Mach 3+ Air Conditioner		
67306	#9233A4551	Electric Heat Kit for Heat-Ready Ceiling Assemblies (Not for Mach 8)
65348	#9330B6151	Add-On Heat Strip for Non-Ducted Cool only 9330X713 Series
60775	#8330B6301	Chillgrille Plenum, no control package, to duct supply air towards the front and rear of coach (See page 15)
61388	#8330B633	Chillgrille Plenum, Cool Only, to duct supply air towards sides of coach (See page 15)
60403	#7330A4101	Solar Pal Charger, 5 Watts (See page 1)
66567	#6703-3302	Replacement Filter for Non-Ducted 7330/8330 Series
65354	#9330-3151	Replacement Filter for Non-Ducted 9330Series
60962	#6798A3761	Replacement Filter for Ducted Models
65490	#6798-3751	Replacement Filter, 16" x 16" (Ducted Ceiling used on most Fleetwood Units)

COAST EXCLUSIVE BRANDS: COLEMAN®-MACH®



Coleman-Mach

Coleman®-Mach® 48207 Series

MACH I POWER SAVER RV AIR CONDITIONER

Now charged with (eco-friendly) R-410A. If a little less power will do just fine, consider the Mach I Power Saver. With a compressor rating of 11,000 nominal BTUH, it works well with smaller generators because of its lower amp draw.



SPECIFICATIONS	MACH I POWER SAVER 48207
Cooling Capacity (Nominal BTUH)	11,000
Locked Rotor Cooling Amps	45.6
Running Watts/Cooling (1)	1,080
Running Watts/Cooling (2)	1,340
Running Watts/Heating (3)	1,750
Electrical Rating	115V 60HZ 1 Phase
Delivered BTU Heating Output*	5,600
Approximate Full-Load Amps:	
Cooling	9.9
Heating	15.6*
Evaporator Air Delivery CFM	320 CFM-High Speed
Unit Weight (lbs)**	83.5
Dimensions (Exterior Shroud)	13.8" H x 26.1" W x 38" L
* Optional Heater Assembly. **Installed weight will vary with Ceiling Package option. (1) Cooling A.R.I. Standard Conditioning 80° F. DB/67° F. WB Indoor, 95° F. DB Outdoor at 115VAC. (2) Cooling A.R.I. Desert Condition 100° F. DB/72° F. WB Indoor, 120° F. DB Outdoor at 103.5VAC. (3) 47° F. Outdoor Temperature.	

MACH 1 POWER SAVER AIR CONDITIONER COMPONENTS

Order #	Mfr. #	Description
STEP 1: Choose one Upper Unit, required for all configurations		
63151	#48207C876	Upper Unit Only, Arctic White
STEP 2: One Air Distribution Box (ADB) required for NON-DUCTED ceiling configurations only		
61365	#9330F715	NEW! Cool/Heat-Ready, Free Delivery Ceiling Assembly, White
OR—STEP 2: for NON-DUCTED ceiling configuration with wall thermostat (plenum + thermostat + either control package required)		
61362	#9330F4552	NEW! Free Delivery Plenum for Wall Thermostat, White
61357	#7330F3361	Thermostat, Analog, Cool-Only, 12 Volt Wall-Mount, White (Refer to page 16 for more details)
60277	#7330G3351	Thermostat, Analog, Heat/Cool, 12 Volt Wall-Mount, White (Refer to page 16 for more details)
65346	#8330-752	Cool-Only Control Package
61359	#9330C755	NEW! Heat-Ready AC Control Kit
OR—STEP 2: One Air Distribution Box (ADB) for LATERAL DUCTED configurations only		
63130	#8330A733	Cool-Only Ceiling Assembly, Lateral Ducted, without Thermostat, White
61360	#8330D735	NEW! Heat Ready Ceiling Assembly, Lateral Ducted, without Thermostat, White
61357	#7330F3361	Thermostat, Analog, Cool-Only, 12 Volt Wall-Mount, White (Refer to page 16 for more details)
60277	#7330G3351	Thermostat, Analog, Heat/Cool, 12 Volt Wall-Mount, White (Refer to page 16 for more details)
64444	#8330-763	MCD (Manual Control Ducted) ADB, Cool-Only, White (no thermostat required)
61359	#9330C755	NEW! Heat-Ready AC Control Kit
OR—STEP 2: One Air Distribution Box (ADB) for DUCTED PARK MODELS only		
63126	#8330A743	Cool Only ADB, 24-V, w/o Thermostat
64680	#7330B3441	Thermostat, Standard 24-V
STEP 3: Options for Mach 1 Power Saver Air Conditioner		
67306	#9233A4551	Electric Heat Kit for Heat-Ready Ceiling Assemblies (Not for Mach 8)
65348	#9330B6151	Add-On Heat Strip for Non-Ducted Cool only 9330X713 Series
60775	#8330B6301	Chillgrille Plenum, no control package, to duct supply air towards the front and rear of coach (See page 15)
61388	#8330B633	Chillgrille Plenum, Cool Only, to duct supply air towards sides of coach (See page 15)
60403	#7330A4101	Solar Pal Charger, 5 Watts (See page 1)
66567	#6703-3302	Replacement Filter for Non-Ducted 7330/8330 Series
65354	#9330-3151	Replacement Filter for Non-Ducted 9330Series
60962	#6798A3761	Replacement Filter for Ducted Models
65490	#6798-3751	Replacement Filter, 16" x 16" (Ducted Ceiling used on most Fleetwood Units)

COAST EXCLUSIVE BRANDS: COLEMAN®-MACH®



Coleman®-Mach®

Coleman®-Mach® 48208 Series

MACH III POWER SAVER

100% Cool—27% Less Power!

Now charged with (eco-friendly) R-410A. Uses less power, so there's more electricity for your other appliances. But here's the real shocker: it actually delivers more cooling than a standard 13,500 BTUH air conditioner. Even starts in severe desert conditions, when many other RV A/Cs won't.



SPECIFICATIONS	MACH III POWER SAVER 48208
Cooling Capacity (Nominal BTUH)	13,500
Locked Rotor Cooling Amps	58.4
Running Watts/Cooling (1)	1,190
Running Watts/Cooling (2)	1,440
Running Watts/Heating (3)	1,750
Electrical Rating	115V 60HZ 1 Phase
Delivered BTU Heating Output*	5,600
Approximate Full-Load Amps: Cooling	11.2
Heating	15.6*
Evaporator Air Delivery CFM	320 CFM-High Speed
Unit Weight (lbs)**	83.5
Dimensions (Exterior Shroud)	13.8" H x 26.1" W x 38" L

* Optional Heater Assembly. ** Installed weight will vary with Ceiling Package option. (1) Cooling A.R.I. Standard Conditioning 80° F. DB/67° F. WB Indoor; 95° F. DB Outdoor at 115VAC. (2) Cooling A.R.I. Standard Conditioning 95° F. DB/71° F. WB Indoor, 115° F. DB Outdoor at 103.5VAC. (3) 47° F. Outdoor Temperature.

MACH III POWER SAVER AIR CONDITIONER COMPONENTS

Order #	Mfr. #	Description
STEP 1: Choose one Upper Unit, required for all configurations		
63152	#48208C876	Upper Unit Only, Arctic White
61371	#48208C879	NEW! Upper Unit Only, Black
STEP 2: One Air Distribution Box (ADB) required for NON-DUCTED ceiling configurations only		
61365	#9330F715	NEW! Cool/Heat-Ready, Free Delivery Ceiling Assembly, White
OR—STEP 2: for NON-DUCTED ceiling configuration with wall thermostat (plenum + thermostat + either control package required)		
61362	#9330F4552	NEW! Free Delivery Plenum for Wall Thermostat, White
61357	#7330F3361	Thermostat, Analog, Cool-Only, 12 Volt Wall-Mount, White (Refer to page 16 for more details)
60277	#7330G3351	Thermostat, Analog, Heat/Cool, 12 Volt Wall-Mount, White (Refer to page 16 for more details)
65346	#8330-752	Cool-Only Control Package
61359	#9330C755	NEW! Heat-Ready AC Control Kit
OR—STEP 2: One Air Distribution Box (ADB) for LATERAL DUCTED configurations only		
63130	#8330A733	Cool-Only Ceiling Assembly, Lateral Ducted, without Thermostat, White
61360	#8330D735	NEW! Heat Ready Ceiling Assembly, Lateral Ducted, without Thermostat, White
61357	#7330F3361	Thermostat, Analog, Cool-Only, 12 Volt Wall-Mount, White (Refer to page 16 for more details)
60277	#7330G3351	Thermostat, Analog, Heat/Cool, 12 Volt Wall-Mount, White (Refer to page 16 for more details)
64444	#8330-763	MCD (Manual Control Ducted) ADB, Cool-Only, White (no thermostat required)
61359	#9330C755	NEW! Heat-Ready AC Control Kit
OR—STEP 2: One Air Distribution Box (ADB) for DUCTED PARK MODELS only		
63126	#8330A743	Cool Only ADB, 24-V, w/o Thermostat
64680	#7330B3441	Thermostat, Standard 24-V
STEP 3: Options for Mach III Power Saver Air Conditioner		
67306	#9233A4551	Electric Heat Kit for Heat-Ready Ceiling Assemblies (Not for Mach 8)
65348	#9330B6151	Add-On Heat Strip for Non-Ducted Cool only 9330X713 Series
60775	#8330B6301	Chillgrille Plenum, no control package, to duct supply air towards the front and rear of coach (See page 15)
61388	#8330B633	Chillgrille Plenum, Cool Only, to duct supply air towards sides of coach (See page 15)
60403	#7330A4101	Solar Pal Charger, 5 Watts (See page 1)
66567	#6703-3302	Replacement Filter for Non-Ducted 7330/8330 Series
65354	#9330-3151	Replacement Filter for Non-Ducted 9330Series
60962	#6798A3761	Replacement Filter for Ducted Models
65490	#6798-3751	Replacement Filter, 16" x 16" (Ducted Ceiling used on most Fleetwood Units)

COAST EXCLUSIVE BRANDS: COLEMAN®-MACH®



Coleman-Mach

Coleman®-Mach® POLAR MACH Series

HIGH PERFORMANCE, LOW PROFILE POLAR MACH RV AIR CONDITIONER

Now charged with (eco-friendly) R-410A. The low profile air conditioner series that utilizes the latest air conditioning technology. Environmental chamber testing has documented the Polar Series offers the best cooling capacity versus power consumption performance ever supplied to the RV industry. Aerodynamically styled air conditioner shrouds include weather resistant condenser coil protection. Heat transfer to the vehicle exterior has been dramatically accelerated by the vertically mounted motor and 17" oversized fan blade. **More Cooling—Less Power!** The quiet horizontal rotary compressor is the heart of the Polar's refrigeration system. Refrigeration circuit tubing has been rifled and cross-hatched internally to create turbulence in the refrigerant, improving the system's ability to dissipate heat. Electrical compressor starting components are standard equipment. At 1/3 hp, the motor is the most powerful in the RV industry and features a fan canopy to protect against damage from the elements. High-density polyethylene condensate water collection pan prevents corrosion problems. Durable molded polycarbonate fan guard has been impact tested to 40° below zero for reliability.

A—Large 17" fan moves more air over the oversized coil. **B**—Hail guard shroud protects the coil. **C**—Low profile for better aerodynamics.



SPECIFICATIONS	13.5K units	15K units
Cooling Capacity (Nominal BTUH)	13,500	15,000
Locked Rotor Cooling Amps	63	
Running Watts/Cooling (1)	1,650	1,650
Running Watts/Cooling (2)	1,960	2,050
Running Watts/Heating (3)	1,800	
Electrical Rating	115V 60HZ 1 Phase	
Delivered BTU Heating Output*	5,600	
Approximate Full-Load Amps: Cooling Heating	15.5	15.9
	16.0	16.4
Evaporator Air Delivery CFM	320 CFM	310 CFM
Unit Weight (lbs)**	95.0	
Dimensions (Exterior Shroud)	10.63" H x 30.25" W x 44" L	

* Optional Heater Assembly. ** Installed weight will vary with Ceiling Package option. (1) Cooling A.R.I. Standard Conditioning 80° F. DB/67° F. WB Indoor, 95° F. DB Outdoor at 115VAC. (2) Cooling A.R.I. Standard Conditioning 95° F. DB/71° F. WB Indoor, 115° F. DB Outdoor at 103.5VAC. (3) 47° F. Outdoor Temperature.

POLAR MACH AIR CONDITIONER COMPONENTS

Order #	Mfr. #	Description
STEP 1: Choose one Upper Unit, required for all configurations		
65379	#49203A876	13,500 BTUH Upper Unit Only, Arctic White
61380	#49203A879	NEW! 13,500 BTUH Upper Unit Only, Black
61382	#49223A879	NEW! 13,500 BTUH Upper Unit Only, Condensor Pump, Black
60087	#49204A876	15,000 BTUH Upper Unit Only, White
61381	#49204A879	NEW! 15,000 BTUH Upper Unit Only, Black
61383	#49224A879	NEW! 15,000 BTUH Upper Unit Only, Condensor Pump, Black
STEP 2: One Air Distribution Box (ADB) required for NON-DUCTED ceiling configurations only		
61365	#9330F715	NEW! Cool/Heat-Ready, Free Delivery Ceiling Assembly, White
OR—STEP 2: for NON-DUCTED ceiling configuration with wall thermostat (plenum + thermostat + either control package required)		
61362	#9330F4552	NEW! Free Delivery Plenum for Wall Thermostat, White
61357	#7330F3361	Thermostat, Analog, Cool-Only, 12 Volt Wall-Mount, White (Refer to page 16 for more details)
60277	#7330G3351	Thermostat, Analog, Heat/Cool, 12 Volt Wall-Mount, White (Refer to page 16 for more details)
65346	#8330-752	Cool-Only Control Package
61359	#9330C755	NEW! Heat-Ready AC Control Kit
OR—STEP 2: One Air Distribution Box (ADB) for LATERAL DUCTED configurations only		
63130	#8330A733	Cool-Only Ceiling Assembly, Lateral Ducted, without Thermostat, White
61360	#8330D735	NEW! Heat Ready Ceiling Assembly, Lateral Ducted, without Thermostat, White
61357	#7330F3361	Thermostat, Analog, Cool-Only, 12 Volt Wall-Mount, White (Refer to page 16 for more details)
60277	#7330G3351	Thermostat, Analog, Heat/Cool, 12 Volt Wall-Mount, White (Refer to page 16 for more details)
64444	#8330-763	MCD (Manual Control Ducted) ADB, Cool-Only, White (no thermostat required)
61359	#9330C755	NEW! Heat-Ready AC Control Kit
OR—STEP 2: One Air Distribution Box (ADB) for DUCTED PARK MODELS only		
63126	#8330A743	Cool Only ADB, 24-V, w/o Thermostat
64680	#7330B3441	Thermostat, Standard 24-V
STEP 3: Options for Polar Mach Air Conditioner		
67306	#9233A4551	Electric Heat Kit for Heat-Ready Ceiling Assemblies (Not for Mach 8)
65348	#9330B6151	Add-On Heat Strip for Non-Ducted Cool only 9330X713 Series
60774	#9203-5291	Shroud for C/D Models, Black
69235	#9203-5261	Replacement Shroud for C/D Models, White
60775	#8330B6301	Chillgrille Plenum, no control package, to duct supply air towards the front and rear of coach (See page 15)
61388	#8330B633	Chillgrille Plenum, Cool Only, to duct supply air towards sides of coach (See page 15)
65354	#9330-3151	Replacement Filter for Non-Ducted 9330Series
60962	#6798A3761	Replacement Filter for Ducted Models

COAST EXCLUSIVE BRANDS: COLEMAN®-MACH®



Coleman®-Mach®

Coleman®-Mach® Polar Mach 49201 Series

LOW PROFILE POLAR CUB RV AIR CONDITIONER

Now charged with (eco-friendly) R-410A. The low profile air conditioner series that utilizes the latest air conditioning technology. Environmental chamber testing has documented the Polar Series offers the best cooling capacity versus power consumption performance ever supplied to the RV industry. Aerodynamically styled air conditioner shrouds include weather resistant condenser coil protection. Heat transfer to the vehicle exterior has been dramatically accelerated by the vertically mounted motor and 17" oversized fan blade. **More Cooling—Less Power!** The quiet horizontal rotary compressor is the heart of the Polar's refrigeration system. Refrigeration circuit tubing has been rifled and cross-hatched internally to create turbulence in the refrigerant, improving the system's ability to dissipate heat. Electrical compressor starting components are standard equipment. At 1/3 hp, the motor is the most powerful in the RV industry and features a fan canopy to protect against damage from the elements. High-density polyethylene condensate water collection pan prevents corrosion problems. Durable molded polycarbonate fan guard has been impact tested to 40° below zero for reliability.

A—Large 17" fan moves more air over the oversized coil. **B**—Hail guard shroud protects the coil. **C**—Low profile for better aerodynamics.



SPECIFICATIONS	POLAR CUB 49201
Cooling Capacity (Nominal BTUH)	9,200
Locked Rotor Cooling Amps	58.4
Running Watts/Cooling (1)	1,225
Running Watts/Cooling (2)	1,450
Running Watts/Heating (3)	1,750
Electrical Rating	115V 60HZ 1 Phase
Delivered BTU Heating Output*	5,600
Approximate Full-Load Amps: Cooling	11.5
Heating	13.75*
Evaporator Air Delivery CFM	200 CFM-High Speed
Unit Weight (lbs)**	89.5
Dimensions (Exterior Shroud)	10.63" x 30.25" x 44"

* Optional Heater Assembly. ** Installed weight will vary with Ceiling Package option. (1) Cooling A.R.I. Standard Conditioning 80° F. DB/67° F. WB Indoor, 95° F. DB Outdoor at 115VAC. (2) Cooling A.R.I. Standard Conditioning 95° F. DB/71° F. WB Indoor, 115° F. DB Outdoor at 103.5VAC. (3) 47° F. Outdoor Temperature.

POLAR CUB AIR CONDITIONER COMPONENTS

Order #	Mfr. #	Description
STEP 1: Choose one Upper Unit, required for all configurations		
65381	#49201A876	9,200 BTUH Upper Unit Only, Arctic White
STEP 2: One Air Distribution Box (ADB) required for NON-DUCTED ceiling configurations only		
61365	#9330F715	NEW! Cool/Heat-Ready, Free Delivery Ceiling Assembly, White
OR—STEP 2: for NON-DUCTED ceiling configuration with wall thermostat (plenum + thermostat + either control package required)		
61362	#9330F4552	NEW! Free Delivery Plenum for Wall Thermostat, White
61357	#7330F3361	Thermostat, Analog, Cool-Only, 12 Volt Wall-Mount, White (Refer to page 16 for more details)
60277	#7330G3351	Thermostat, Analog, Heat/Cool, 12 Volt Wall-Mount, White (Refer to page 16 for more details)
65346	#8330-752	Cool-Only Control Package
61359	#9330C755	NEW! Heat-Ready AC Control Kit
OR—STEP 2: One Air Distribution Box (ADB) for LATERAL DUCTED configurations only		
63130	#8330A733	Cool-Only Ceiling Assembly, Lateral Ducted, without Thermostat, White
61360	#8330D735	NEW! Heat Ready Ceiling Assembly, Lateral Ducted, without Thermostat, White
61357	#7330F3361	Thermostat, Analog, Cool-Only, 12 Volt Wall-Mount, White (Refer to page 16 for more details)
60277	#7330G3351	Thermostat, Analog, Heat/Cool, 12 Volt Wall-Mount, White (Refer to page 16 for more details)
64444	#8330-763	MCD (Manual Control Ducted) ADB, Cool-Only, White (no thermostat required)
61359	#9330C755	NEW! Heat-Ready AC Control Kit
OR—STEP 2: One Air Distribution Box (ADB) for DUCTED PARK MODELS only		
63126	#8330A743	Cool Only ADB, 24-V, w/o Thermostat
64680	#7330B3441	Thermostat, Standard 24-V
STEP 3: Options for Mach III Power Saver Air Conditioner		
67306	#9233A4551	Electric Heat Kit for Heat-Ready Ceiling Assemblies (Not for Mach 8)
65348	#9330B6151	Add-On Heat Strip for Non-Ducted Cool only 9330X713 Series
60774	#9203-5291	Shroud for C/D Models, Black
69235	#9203-5261	Replacement Shroud for C/D Models, White
60775	#8330B6301	Chillgrille Plenum, no control package, to duct supply air towards the front and rear of coach (See page 15)
61388	#8330B633	Chillgrille Plenum, Cool Only, to duct supply air towards sides of coach (See page 15)
65354	#9330-3151	Replacement Filter for Non-Ducted 9330Series
60962	#6798A3761	Replacement Filter for Ducted Models

COAST EXCLUSIVE BRANDS: COLEMAN®-MACH®



Coleman®-Mach®

Coleman®-Mach®49004 Series

HIGH PERFORMANCE, LOW PROFILE POLAR MACH HEAT PUMP RV AIR CONDITIONER

Now charged with (eco-friendly) R-410A. With the Coleman®-Mach® Polar Mach™ RV Heat Pump, you get a high-performance air conditioner and an economical, electric source of heat in one sleek package. When it cools, the Polar Series offers the best cooling capacity versus power consumption we have ever supplied to the recreation vehicle industry, according to environmental chamber testing. Heat transfer to the vehicle exterior has been dramatically accelerated by our vertically mounted motor and 17" oversized fan blade, while an optional condensate pump will remove 100% of the condensation in the cool mode operation. When a chill is in the air, a special reversing valve enables the cooling system to convert to a heating system. In fact, the Polar Mach™ heat pump provides 30% more heating capacity—at half the power consumption—compared to a conventional electric heat element-only system.

A—Large 17" fan moves more air over the oversized coil. **B**—Hail guard shroud protects the coil. **C**—Low profile for better aerodynamics.



SPECIFICATIONS	POLAR MACH™ 15K Heat Pump	POLAR MACH™ 13.5K Heat Pump
Cooling Capacity (Nominal BTUH)	15,000	13,500
Locked Rotor Cooling Amps	63	63
Running Watts/Cooling (1)	1,650	1,660
Running Watts/Cooling (2)	1,950	1,900
Running Watts/Heating (3)	1,800	1,800
Electrical Rating	115V 60HZ 1 Phase	
Delivered BTU Heating Output*	5,600	
Approximate Full-Load Amps: Cooling Heating*	15.9	15.6
	16.4	16.4
Evaporator Air Delivery CFM	310 CFM-High Speed	
Unit Weight (lbs)**	100	99
Dimensions (Exterior Shroud)	10.63" H x 30.25" W x 44" L	
* Optional Heater Assembly. **Installed weight will vary with Ceiling Package option (from 3.5 to 12.5 lbs). (1) Cooling A.R.I. Standard Conditioning 80° F. DB/67° F. WB Indoor, 95° F. DB Outdoor at 115VAC. (2) Cooling A.R.I. Standard Conditioning 100° F. DB/72° F. WB Indoor, 120° F. DB Outdoor at 103.5VAC. (3) In Heating Element mode of operation		

POLAR MACH HEAT PUMP AIR CONDITIONER COMPONENTS

Order #	Mfr. #	Description
STEP 1: Choose one Upper Unit, required for all configurations		
61376	#49003A879	13,500 BTUH Upper Unit Only, Black ◆
61378	#49023A879	NEW! 13,500 BTUH Upper Unit Only, Condensor Pump, Black ◆
61377	#49004A879	15,000 BTUH Upper Unit Only, Black ◆
69249	#49024A876	15,000 BTUH Upper Unit Only, Condensor Pump, Arctic White ◆
61379	#49024A879	15,000 BTUH Upper Unit Only, Condensor Pump, Black ◆
STEP 2: One Air Distribution Box (ADB) required for NON-DUCTED ceiling configurations only		
61350	#9530G715	NEW! Heat-Ready Ceiling Assembly, Free Delivery, White
OR—STEP 2: Both required for LATERAL DUCTED configurations only		
61351	#8530D735	NEW! Heat Ready Ceiling Assembly, Lateral Ducted, White
65659	#8530A3451	Thermostat for Heat Pump (Refer to page 16 for more details)
STEP 3: Options for Mach III Power Saver Air Conditioner		
67306	#9233A4551	Electric Heat Kit for Heat-Ready Ceiling Assemblies (Not for Mach 8)
60774	#9203-5291	Shroud for C/D Models, Black
69235	#9203-5261	Replacement Shroud for C/D Models, White
60775	#8330B6301	Chillgrille Plenum, no control package, to duct supply air towards the front and rear of coach (See page 15)
65354	#9330-3151	Replacement Filter for Non-Ducted 9330Series
60962	#6798A3761	Replacement Filter for Ducted Models

Coleman®-Mach®

Rooftop Heat Pumps



INTRODUCING *the* **MACH8**

- **LOWEST** profile in the Industry... standing short at 8 inches tall. Lower profile means LESS DRAG and improved fuel efficiency.
- **Two motors means The MACH 8 DELIVERS** the same high BTUs of cooling on both high and low speed operation
- **HIGHEST** air flow delivery on high speed, and ULTRA QUIET on low speed for night time cooling.
- **Industry EXCLUSIVE** - molded one piece fiberglass base pan provides excellent durability with reduced weight



- Weighing in at 90 lbs, the MACH 8 is the **LIGHTEST** low profile unit made



FOR MORE INFORMATION,
please visit RVComfort.com

- Backward compatible with any Coleman Mach air conditioner, and installs easily from the roof for ducted top down mounted systems
- Operates even at desert conditions of 125° F
- Has the **LARGEST** BTU resistance heater of any RV air conditioner
- Another Quality Coleman Mach air conditioner - 5,000,000 units and counting. All built in our Wichita, KS factory.



Manufacturer of
Coleman-Mach
RV Air Conditioners

COAST EXCLUSIVE BRANDS: COLEMAN®-MACH®

Coleman-Mach

MACH 8 RV ROOFTOP AIR CONDITIONERS

- **LOWEST PROFILE** in the industry, standing short at 8 inches tall. Lower profile means less drag, improved fuel efficiency.
- **TWO MOTORS** means the Mach 8 delivers the same high BTUs of cooling on both high and low speed operation.
- **HIGHEST AIR FLOW** delivery on high speed, and ultra quiet on low speed for night time cooling.
- Industry **EXCLUSIVE** molded one-piece fiberglass base pan provides excellent durability with reduced weight.
- Weighing in at 90 lbs., the Mach 8 is the **LIGHTEST** low profile unit made.
- Backward compatible with any Coleman Mach air conditioner, and installs easily from the roof for ducted top down mounted systems.
- Operates even at desert conditions of 125 degrees F.
- Has the **LARGEST** BTU resistance heater of any RV air conditioner.

MACH 8 Specifications	13,500 BTU A/C	15,000 BTU A/C
Cooling/Heating Capacity	13,500 BTU	15,000 BTU
Electric Heat Strip Capacity	6,000 BTU	6,000 BTU
Electrical Rating	115 VAC, 60 HZ, 1 Phase	115 VAC, 60 HZ, 1 Phase
Cooling AMPs:		
Compressor	12.1	12.7
Indoor Motor High / Low	1.3 / 0.7	1.3 / 0.7
Outdoor Motor	1.9	1.9
Total @ High / Low Speed	15.3 / 14.7	15.9 / 15.3
Running Watts @ A.R.I. Standard	1599	1483
Running Watts @ Desert Condition	1913	1811
Running Watts-Electric Heat Strip	1748	1748
Compressor Locked Rotor Amps	63	63
Refrigerant Charge - R-410A	14.0 oz.	20.0 oz.
Evaporator Air Delivery (CFM)	300 - High Speed	
Weight	90 lbs.	92 lbs.
Dimensions, Exterior Shroud: 8.25" H x 28.40" W x 41.10" L; Interior Shroud: 2.2" D x 19.9" W x 20.1" L.		



Another Quality Coleman Mach air conditioner; **5,000,000** units and counting, all built in Wichita, KS.

MACH 8 COMPONENTS

Order #	Mfr. #	Description
STEP 1: Choose one Upper Unit, required for all configurations		
62592	#47203-876	NEW! 13,500 Mach 8 White ◆
62595	#47203-879	NEW! 13,500 Mach 8 Black ◆
62596	#47204-876	NEW! 15,000 Mach 8 White ◆
62613	#47204-879	NEW! 15,000 Mach 8 Black ◆
62614	#47223-879	NEW! 13,500 Mach 8, Condensor Pump, Black ◆
62615	#47224-879	NEW! 15,000 Mach 8, Condensor Pump, Black ◆
STEP 2: One Air Distribution Box (ADB) required for NON-DUCTED ceiling configurations only		
61365	#9330F715	NEW! Cool/Heat-Ready, Free Delivery Ceiling Assembly, White
OR—STEP 2: for NON-DUCTED ceiling configuration with wall thermostat (plenum + thermostat + either control package required)		
61362	#9330F4552	NEW! Free Delivery Plenum for Wall Thermostat, White
61357	#7330F3361	Thermostat, Analog, Cool-Only, 12 Volt Wall-Mount, White (Refer to page 16 for more details)
60277	#7330G3351	Thermostat, Analog, Heat/Cool, 12 Volt Wall-Mount, White (Refer to page 16 for more details)
65346	#8330-752	Cool-Only Control Package
61359	#9330C755	NEW! Heat-Ready AC Control Kit
OR—STEP 2: One Air Distribution Box (ADB) for LATERAL DUCTED configurations only		
63130	#8330A733	Cool-Only Ceiling Assembly, Lateral Ducted, without Thermostat, White
61360	#8330D735	NEW! Heat Ready Ceiling Assembly, Lateral Ducted, without Thermostat, White
61357	#7330F3361	Thermostat, Analog, Cool-Only, 12 Volt Wall-Mount, White (Refer to page 16 for more details)
60277	#7330G3351	Thermostat, Analog, Heat/Cool, 12 Volt Wall-Mount, White (Refer to page 16 for more details)
64444	#8330-763	MCD (Manual Control Ducted) ADB, Cool-Only, White (no thermostat required)
61359	#9330C755	NEW! Heat-Ready AC Control Kit
OR—STEP 2: One Air Distribution Box (ADB) for DUCTED PARK MODELS only		
63126	#8330A743	Cool Only ADB, 24-V, w/o Thermostat
64680	#7330B3441	Thermostat, Standard 24-V
STEP 3: Options for Mach 8 Air Conditioner		
62763	#47233-4551	NEW! Electric Heat Kit for Mach 8 Heat-Ready Ceiling Assemblies
63220	#47233-3291	NEW! Replacement Shroud, Black
63206	#47233-3261	NEW! Replacement Shroud, White
60775	#8330B6301	Chillgrille Plenum, no control pkg.; ducts supply air towards front and rear of coach (See page 15)
61388	#8330B633	Chillgrille Plenum, Cool Only, to duct supply air towards sides of coach (See page 15)
60559	#8330A5221	Carrier A/C Control Conv Kit
60560	#8330-5221	Carrier HP Control Conv Kit
65354	#9330-3151	Replacement Filter for Non-Ducted 9330Series
60962	#6798A3761	Replacement Filter for Ducted Models

COAST EXCLUSIVE BRANDS: COLEMAN®-MACH®

Coleman-Mach

MACH 8 HEAT PUMP RV ROOFTOP AIR CONDITIONERS

HEAT PUMP EFFICIENCY!

- **LOWEST PROFILE** in the industry, standing short at 8 inches tall. Lower profile means less drag, improved fuel efficiency.
- **TWO MOTORS** means the Mach 8 delivers the same high BTUs of cooling on both high and low speed operation.
- **HIGHEST AIR FLOW** delivery on high speed, and ultra quiet on low speed for night time cooling.
- Industry **EXCLUSIVE** molded one-piece fiberglass base pan provides excellent durability with reduced weight.
- Weighing in at 93 lbs., the Mach 8 HP is the **LIGHTEST** low profile heat pump unit made.
- Backward compatible with any Coleman Mach air conditioner, and installs easily from the roof for ducted top down mounted systems.
- Operates even at desert conditions of 125 degrees F.
- Has the **LARGEST** BTU resistance heater of any RV air conditioner.

MACH 8 Specifications	13,500 BTU Heat Pump	15,000 BTU Heat Pump
Cooling/Heating Capacity	13,500 BTU	15,000 BTU
Electric Heat Strip Capacity	6,000 BTU	6,000 BTU
Electrical Rating	115 VAC, 60 HZ, 1 Phase	
Cooling AMPs:		
Compressor	12.5	12.7
Indoor Motor High / Low	1.3 / 0.7	1.3 / 0.7
Outdoor Motor	1.9	1.9
Total @ High / Low Speed	15.7 / 15.1	15.9 / 15.3
Running Watts @ A.R.I. Standard	1647	1471
Running Watts @ Desert Condition	1946	1832
Running Watts-Electric Heat Strip	1748	1748
Compressor Locked Rotor Amps	63	63
Refrigerant Charge - R-410A	18.25 oz.	21.0 oz.
Evaporator Air Delivery (CFM)	300 - High Speed	
Weight	93 lbs.	94 lbs.
Dimensions, Exterior Shroud: 8.25" H x 28.40" W x 41.10" L; Interior Shroud: 2.2" D x 19.9" W x 20.1" L.		

Another Quality Coleman Mach air conditioner;
5,000,000 units and counting, all built in Wichita, KS.



MACH 8 HEAT PUMP COMPONENTS


Order #	Mfr. #	Description
STEP 1: Choose one Upper Unit, required for all configurations		
62645	#47003-876	NEW! 13,500 Mach 8 Heat Pump, White ◆
62623	#47003-879	NEW! 13,500 Mach 8 Heat Pump, Black ◆
62628	#47004-879	NEW! 15,000 Mach 8 Heat Pump, Black ◆
62642	#47023-879	Coming Soon! 13,500 Mach 8 Heat Pump with Condensor Pump, Black ◆
62643	#47024-876	NEW! 15,000 Mach 8 Heat Pump with Condensor Pump, White ◆
62644	#47024-879	NEW! 15,000 Mach 8 Heat Pump with Condensor Pump, Black ◆
STEP 2: One Air Distribution Box (ADB) required for NON-DUCTED ceiling configurations only		
61350	#9530G715	NEW! Heat-Ready Ceiling Assembly, Free Delivery, White
OR—STEP 2: Both required for LATERAL DUCTED configurations only		
61351	#8530D735	NEW! Heat Ready Ceiling Assembly, Lateral Ducted, White
65659	#8530A3451	Thermostat for Heat Pump (Refer to page 16 for more details)
STEP 3: Options for Mach 8 Heat Pump Air Conditioner		
62763	#47233-4551	NEW! Electric Heat Kit for Mach 8 Heat-Ready Ceiling Assemblies
63220	#47233-3291	NEW! Replacement Shroud, Black
63206	#47233-3261	NEW! Replacement Shroud, White
60775	#8330B6301	Chillgrille Plenum, no control pkg.; ducts supply air towards front and rear of coach (See pg. 347)
65354	#9330-3151	Replacement Filter for Non-Ducted 9330Series
60962	#6798A3761	Replacement Filter for Ducted Models

COAST EXCLUSIVE BRANDS: COLEMAN®-MACH®



Coleman-Mach

COLEMAN®-MACH® PARK PAC AIR CONDITIONER



CARRIER TO COLEMAN-MACH ROOF TOP UNIT ADAPTER KIT

This adapter kit lets you replace a Carrier air conditioner with a Coleman-Mach air conditioner. It is required because the inside grills on the Carrier units were not designed to work with the Coleman unit; these are conversion kits to allow them to work with Coleman.

Cool down with the most powerful air conditioner for recreational park trailers

You'll be amazed by the powerful cooling performance of the Park PAC, with the highest cooling capacity and airflow in the industry. The Park PAC utilizes oversized coils and dual fan motors for quiet and very efficient operation. Installation and service of the Park PAC are a breeze, also. The unit can be coupled directly to the floor ducts, or located on the ground anywhere under or around the trailer. There's even a built-in mounting pad for added convenience. Service panels are conveniently located, for easy access to all components. The Park PAC is designed to meet the needs of today's recreational park trailer industry with:

- Strong 535 CFM airflow, which will be more than adequate, even in demanding applications.
- 13,700 BTUH capacity (delivered).
- Oversized coils for higher efficiency and superior performance in high ambient temperatures.
- An energy Efficient Rating (EER) of 9+ ensures cost-efficient cooling.
- Dual fan motors for quiet, efficient operation.
- Flexible cold air discharge which can be directed in an upward or outward direction.
- Easy installation on built-in mounting pad.

- 115V AC, 60 Hz, 1 phase.
- Cooling full load amps at A.R.I. standard condition: 10.4 amps compressor; 1.9 amps outdoor fan motor, 1.8 amps indoor fan motor, 14.1 amps total.
- 1,540 running watts (standard), 2050 (max.).
- 67.0 compressor locked rotor amps.
- Easy access to internal components and electrical connections.
- 36" L x 21" W x 16-1/8" H; 116 lbs. unit weight.

64678 Park PAC #46413-812 **◆1**

Park PAC Air Conditioner Accessories:

64679 Ducting Connector Kit #6633-6151 **1**

24 Volt Thermostat:

64680 Standard #7330B3441 **1**

64681 Digital #8330A3241 **1**

Coleman-Mach

COLEMAN®-MACH® TWO TON PLUS CENTRAL AIR CONDITIONER

This powerful air conditioner is out of sight!

The Two Ton PLUS™ Central Air Conditioner. You won't see it on your RV, because this alternative to rooftop air conditioners installs completely out of sight on or underneath the floor of your RV.

You can customize the installation to locate the unit where it works best in your particular RV application, and can also tailor the air distribution system to fit your design requirements. It also contributes to a lower center of gravity, enhancing the overall stability of the vehicle.

The Two Ton PLUS. is unique because it utilizes two compressors in a single, self-contained package. When cooling requirements are moderate, it uses only one compressor. When additional cooling is needed, you get the additional benefit of a second compressor.



69556



Central Heat Pump

Flexible installation lets you put your unit where you want it!

The Two Ton PLUS™ is unique because it features two 13,500-BTU compressors in a single packaged unit. It automatically cycles on one or both compressors, as required, to meet your air conditioning or heating needs. In the heating mode, the Two Ton PLUS™ uses electricity to provide heat when temperatures are moderate.

69859 Two Tons PLUS, Central Air Conditioner, With Heat Pump #46515-811 **◆1**

69556 NEW! Wall-Mounted Thermostat, Two Stage HP, Digital, Black #6535-3442 **1**

69861 Lifeline Wiring Harness #6795C4351 **1**

Model #	Part #	Color
IF REPLACING A CARRIER ROOF TOP AIR CONDITIONER		
Carrier Roof Top Air Conditioner Cool-Only Ducted		
Standard A/C		
68RV14102A	99-00468-00	White
68RV14102A	99-00468-20	Black
High Capacity A/C		
68RV15102A	99-00468-08	White
68RV15102A	99-00468-28	Black
Lo-Profile High Capacity A/C		
68RV15103A	99-00468-10	White
68RV15103A	99-00468-32	Black
Lo-Profile Standard A/C		
68RV14103A	99-00468-12	White
68RV14103A	99-00468-30	Black
Carrier Ceiling Unit Cool-Only Ducted		
Remote Cool Only Ducted		
68RV0010KA	99-00469-06	White
Remote Cool Only Ducted Thick		
68RV0010KS	99-00469-35	White
USE THIS COLEMAN ADAPTER FOR USE WITH ANY COLEMAN-MACH ROOF TOP AIR CONDITIONER		
60559	8330-5221	
IF REPLACING A CARRIER ROOF TOP HEAT PUMP		
Carrier Roof Top Heat Pump Ducted		
Standard H/P Ducted		
68RV11112A	99-00468-06	White
68RV11112A	99-00468-26	Black
Lo-Profile H/P Ducted		
68RV14113A	99-00468-13	White
68RV14113A	99-00468-33	Black
Carrier Ceiling Unit Heat Pump Ducted		
Remote H/P Ducted		
68RV0011LA	99-00469-13	White
Remote H/P Ducted Thick		
68RV0011KS	99-00469-36	White
USE THIS COLEMAN ADAPTER FOR USE WITH ANY COLEMAN-MACH ROOF TOP HEAT PUMP		
60560	8530-5221	

COAST EXCLUSIVE BRANDS: COLEMAN®-MACH®



Coleman-Mach



Cool off your RV fast with CHILLGRILLE REPLACEMENT CEILING ASSEMBLY for Ducted Air Conditioners


Exclusive Direct-Flow Louver System provides cool air where you need it for personalized comfort in any RV!

- **OPEN** the specially designed louvers to channel cool air straight down into the cabin.
- **CLOSE** the louvers to divert cool air through your existing duct system.
- Exclusive **EZReach Filter System** provides quick access to the washable air filter. Simply loosen the fastener and swing out the grille to remove the filter.
- Easy installation with fully illustrated instructions.
- Slender profile provides plenty of overhead clearance.

• **Model 8330** is for use with all 8000 and 9000 Series Coleman®-Mach® air conditioners with lateral duct and straight through duct systems. To determine if this Chillgrille™ fits your unit, simply remove the existing plastic ceiling assembly inside your RV. If your unit looks like either of the pictures shown, you can use one of the Model 8330 units shown below.



Picture 1



Picture 2

Model 8330 Series Chillgrille:

64955 Chillgrille for 8000 and 9000 Series Coleman Mach ducted air conditioners #8330A6331 1

60775 Chillgrille without Control Package, for ducted straight-thru systems, to duct supply air towards the front and rear of the coach #8330B6301 1

61388 *NEW!* Chillgrille Ceiling Assembly, Cool Only, for lateral ducting systems to duct supply air towards the sides of the coach #8330B633 1

RVP REPLACEMENT SHROUDS FOR COLEMAN®-MACH® AIR CONDITIONERS

"D" SERIES SHROUD

Fits the "D" Series of A/Cs. Horizontal vents and no decals or embossing. Works on all 8000 model series A/Cs as well as all 7000 models. Co-polymer polypropylene material is paintable. Better UV protection. As good or better impact resistant. Strong 2-piece inter-lock construction. Smaller footprint on roof.

D-Series Shroud, 13.5" x 26" x 37":

66578 Arctic White #8335A5261 12

60773 Black #8335A5291 1

MINI-MACH SHROUD

Coleman-Mach Shroud for Mini-Mach:

60827 Arctic White #6727-3761 ♦ 1

*D-Series
66578*



*D-Series
60773*



Coleman-Mach

COAST EXCLUSIVE BRANDS: COLEMAN®-MACH®



61962



64680

Coleman-Mach



61148

One thermostat for all your heating and cooling needs!

RVP COLEMAN®-MACH® RV COMFORT.ZC™

ZONE CONTROL THERMOSTAT

With the RVComfort.ZC™ zone control thermostat, you can control up to four rooftop air conditioners or heat pumps, plus four zones of gas, hydronic or electric strip heaters and fans all from one location! The system utilizes a series of advanced heat sensing devices which track temperatures in each of the four zones and activate heating or cooling as needed to maintain the selected temperatures. Zones can be turned on or off individually to save propane, electricity and money, so if you're spending more time in the front of your RV on a hot summer day, you can maintain a more comfortable temperature there and leave it warmer in unused areas.

With an attractive, Euro-style case and simple, user-friendly controls, the RVComfort.ZC™ is the easy way to stay comfortable all year long.

61148 Digital Zoned T-Stat, White
#8330D3351 1

61145 *LS US only* Zone Control Kit (Heat/Cool)
#8330C755 1

61361 *NEW!* Zone Control (Heat Ready)
#8330D755 1

62233 *NEW!* Zone Control (Cool Only)
#8330B751 1

61152 Room Sensor F/Zoned T-Stat, White
#8330-5191 1



64681




60277



69845



65659

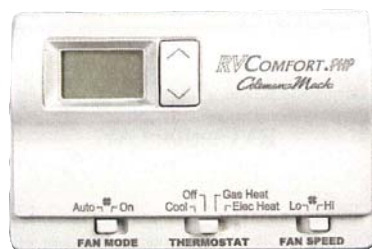

66394



61357

RVP COLEMAN-MACH A/C THERMOSTAT INFORMATION

Wall thermostat reference guide. White.

- 64680** A-1, 24 VAC, Heat/Cool, no display #7330B3441 1
- 61962** A-1, 2-stage, Heat/Cool, with display #6636-3441 1
- 60277** A-1, Single Stage, Heat/Cool, no display, no plugs #7330G3351 1
- 61357** *NEW!* A-1, Single Stage, Cool ONLY, no display, no plugs #7330F3361 1
- 64681** ICM, 24 VAC, Heat/Cool, with display #8330A3241 1
- 65659** ICM, Single Stage, for Heat Pump, with Display, no plugs #8530A3451 1
- 69845** ICM, Single Stage, Heat/Cool, with display, no plugs #8330-3362 1
- 66394** ICM, 2-Stage, Heat Pump #6536A3351 1





This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.