





EZ LATCH COUPLER OPERATION 2" & 2 5/16" COUPLERS

(4) 5/8" Grade 5 Bolts are required with channel mounted 2" & 2 5/16" couplers

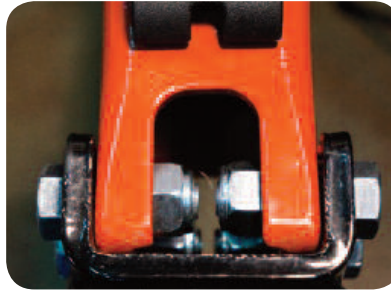

Step 1

(1) EZ Latch couplers do not require users to lift the handle for the coupler to engage the ball. Position the ball in the center of the ball socket or slightly forward, then begin to lower the coupler with the jack on the trailer.

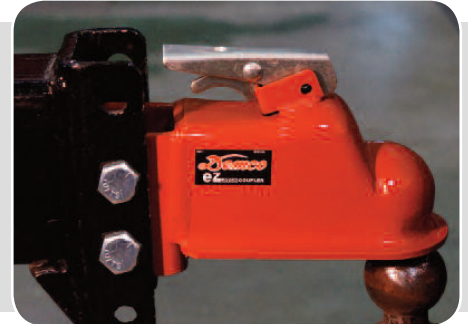

Step 2

(2) At the mid-way point when lowering the trailer, the stem on the handle will begin to rise up allowing the ball to enter the ball socket.



Step 3

(3) Once the ball has fully engaged the socket the ball keeper will snap back into place securing the coupler to the ball.



All Demco EZ Latch couplers are tested and rated without the use of a safety pin and are not required for the couplers to be used in safe operation. A security hole is available on all the EZ Latch couplers to be used in correlation with a lock for theft deterrence.

Doing Our Best to Provide You the Best
www.demco-products.com • 1.800.543.3626



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.