

13.5K BTU


Low Profile

Rooftop Unit for

the US Market



Rooftop unit works with



ADB Mounting frame to connect with low profile AC unit* (#2022120382 / C-FACR12SA-A01)






OR



ADB for Electronic Thermostat* (#2022007391 / FACT12CA-PS-OEM)

ADB with Manual Control* (#2022007394 / FACT11CA-PS-OEM)

*Sold separately

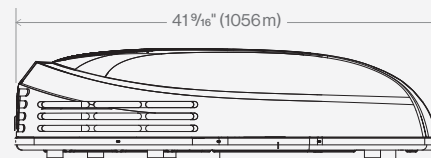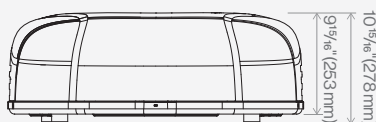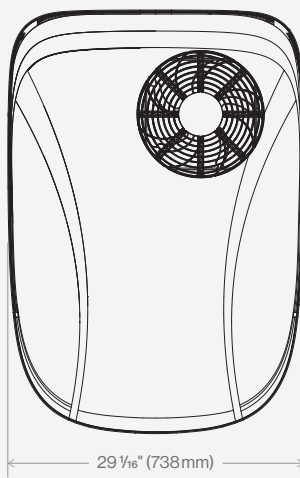

Product Information

Dimensions and Weight

Product Size (W x H x D)

29 1/16" x 10 5/16" x 41 1/16" (738 x 278 x 1056mm)

Packaging Dimensions (L x W x H)

43 5/8" x 29 13/16" x 12 1/8" (1108 x 758 x 308 mm)

Net Weight (kg/lbs)

45.0 / 99.2

Gross Weight (kg/lbs)

50.0 / 110.2

Product Features

- Eco-friendly refrigerant
- Smart control
- 2 fan speeds with FACC10ESSA-BL; 3 fan speeds with FACC12ESZA-BL controller
- Dual fan motors
- Overload protection
- Vibrationsmart™ & Climatesmart™

Product Specifications

Performance

Cooling capacity	13500 BTU
EER (BTU/W)	7.1 (Cooling)
Refrigerant	R410a
IP Class	IP24
Outdoor sound pressure level	≤61dBA
Certification	

Electrical

Volts/Frequency	115V/60Hz
Power consumption (Cooling)	1375W
Cooling amps	12.4A



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.