


FURRION

FWH09AFA-AM

144GPH / 2.4GPM Tankless Gas Water Heater with Antifreeze Protection

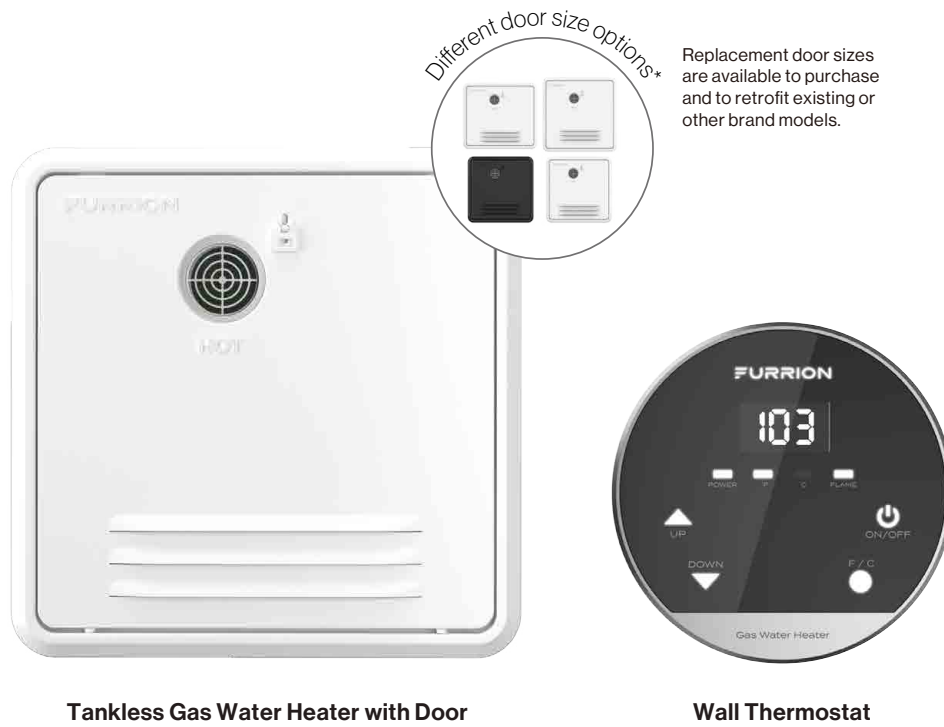

Tankless Gas Water Heater with Door

Wall Thermostat

***Built for the road to feel
like home***

You don't have to sacrifice the amenities of home while traveling in your RV with the Furrion tankless water heater. Our RV water heater handles the demands of running hot water in all faucets, maintaining water pressure and consistent temperatures.



**Output capacity of
2.4 gallons per minute
to maintain constant
water temperature**



**Vortex technology
keeps temperatures
steady to reduce cold
spots and scalding**




**Included sleek wall
thermostat provides easy
operation to set desired
water temperature**

Features


- Designed to retrofit existing water heaters of various sizes
- 60,000 BTU heat output to make your RV water supply feel like home
- Propane gas-powered technology with electric ignition is perfect for RV use
- Consistently delivers hot water to any faucet in your RV for convenience
- Safety features such as auto shut off and pressure relief valve to ensure safe operation
- Vibrationsmart™ technology to withstand shock and vibration while traveling

144GPH / 2.4GPM Tankless Gas Water Heater with Antifreeze Protection (FWH09AFA-AM)


Main Unit

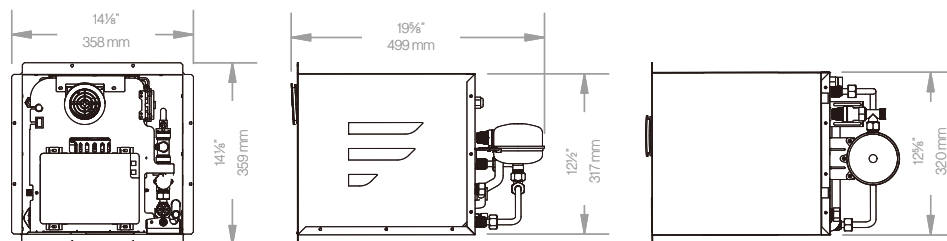

Thermostat



Door (Sold Separately)

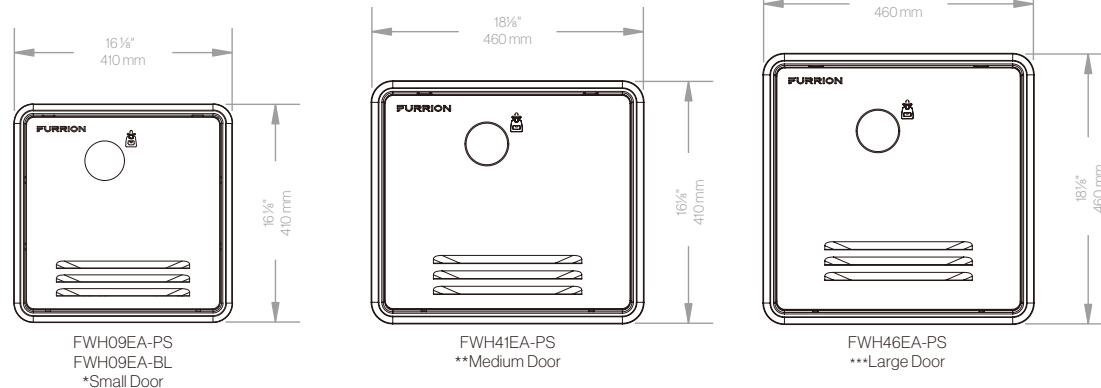

Specifications

Temperature Setting Range	95 - 124°F (35 - 51°C)
Default Setting Temperature	115°F (46°C)
Temperature Stability	Temperature Stabilizer Technology ±1.8-2.6°F (1-2°C)
Low Water Flow Protection	Auto Cut-off <0.32GAL (1.2L)/min
Over Current Protection	10amp Fuse
High Water Pressure Protection	≥87psi (6bar) Auto Release Pressure Valve
Over Temperature Protection	Software Protection: 136°F, ±1.8°F (76°C, ±1°C) Thermal Sensor: 135°F, ±14.4°F (75°C, ±8°C)
Input BTU	13,000 - 60,000BTU

Specifications

Gas Supply	LP (Propane) Only
Gas Inlet Pressure	11" - 14" inch WC
Electric Power Supply	DC 12V 3A
Working Pressure (Water Inlet)	10 - 65 PSI (0.68 - 4.5bar)
Water Flow	0.32GAL (1.2L)/min - 2.4 GAL (9L)/min
Thermal Efficiency	≥81%
Gas Line Connector	UNF 5/8" - 18
Water Inlet Connector	1/2" NPT
Water Outlet Connector	1/2" NPT
Operating Noise	≤65dB
Automatic Ignition	✓
Exhaust Blocking Protection	✓
Antifreeze Protection	✓

Dimensions & Weight	Main Unit	*Small Door	**Medium Door	***Large Door
Product Dimension (W x H x D)	12 3/4 x 12 x 20 3/4" 324 x 320 x 527mm	16 1/8 x 16 1/8 x 1 1/4" 410 x 410 x 33mm	18 1/8 x 16 1/8 x 1 1/4" 460 x 410 x 33mm	18 1/8 x 18 1/8 x 1 1/4" 460 x 460 x 33mm
Packaging Dimension (W x H x D)	22 3/4 x 16 x 16 1/8" 577 x 407 x 410mm	18 1/4 x 19 5/8 x 3 1/8" 465 x 498 x 78mm	20 1/4 x 19 5/8 x 3 1/8" 515 x 498 x 78mm	20 1/4 x 21 1/8 x 3 1/8" 515 x 548 x 78mm
Net Weight (lbs/kg)	27.6lbs / 12.5kg	3.7lbs / 1.7kg	4.6lbs / 2.1kg	5.3lbs / 2.4kg
Gross Weight (lbs/kg)	36.3lbs / 16.5kg	5.5lbs / 2.5kg	6.4lbs / 2.9kg	7.1lbs / 3.2kg

* Retrofit door for Suburban™ 4/6 gallon water heater model.

** Retrofit door for Atwood™ 6 gallon water heater model.

*** Retrofit door for Suburban™ and Atwood™ 10 gallon water heater model.

FWH09AFA-AM_V2.0



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.