

25A Wall Mount MPPT Solar Charge Controller With Mounting Bracket



Main Features



HIGH TRACKING
EFFICIENCY



COMPATIBLE
BATTERY SYSTEM



WORKS WITH FURRION
LIFEPO4 BATTERY



QUIET
COOLING FAN




AUTOMATIC
TEMPERATURE
COMPENSATION




MOUNTING BRACKET
INCLUDED
(FSCC60PWM-BL)

25A Wall Mount MPPT Solar Charge Controller (FSCC30PW-BL)

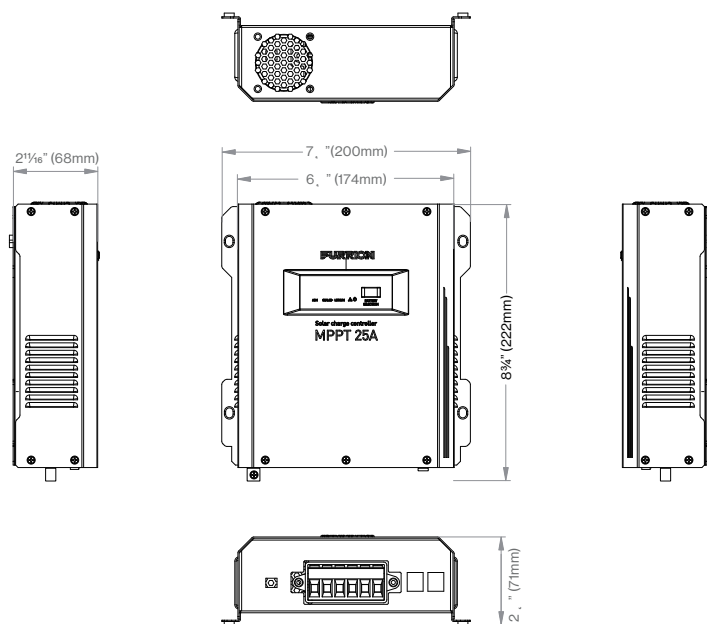

MPPT Controller Mounting Bracket (FSCC60PWM-BL)

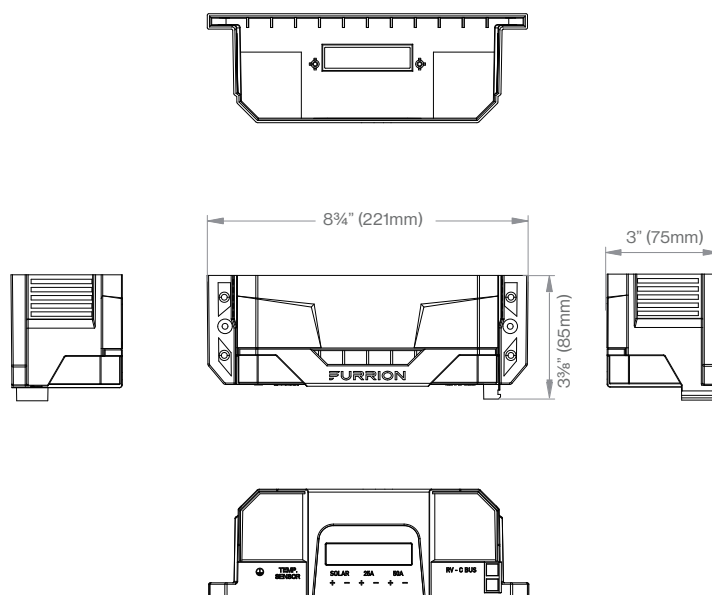

Specifications

Nominal System Voltage	12V/24V
Max. PV Power (Pmax)	300W
Max. PV Open Circuit Voltage (VOC)	70V
MPPT Tracking Efficiency	≥99%
ECO Mode Current Consumption	<1mA
Min. Battery Voltage for Charging	0Vdc
Max. Charging Current	25A
Charging Mode (three charging stage)	Bulk charging, absorption charging, float charging
Dierent Battery Mode Option	AGM, LiFePO4, Sealed lead acid
LED Indicator	✓
Maximum Charging Efficiency	≥90%
Automatic Detection for 12V/24V Battery	✓
Automatic Temperature Compensation	✓
Battery Over Charging Protection	✓
PV Reverse Protection	✓
Battery Reverse Protection	✓
Over Temperature Protection	✓
Grounding	Common Negative
Communication Port	RV-C BUS
Operating Temperature Range	-4°F to 122°F (-20°C to 50°C)
Storage Temperature Range	-22°F to 158°F (-30°C to 70°C) 10 to 95% RH
Certificate: CSA , FCC, IC	✓

Dimensions and Weight

25A Wall Mount MPPT Solar Charge Controller

Product Dimension (W x H x D)	8 3/4 x 8 1/2 x 2 1/8" (222 x 214 x 71mm)
Individual Packaging Dimension (W x H x D)	14 1/8 x 4 3/8 x 9 1/2" (360 x 111 x 243mm)
Master Carton Dimension (W x H x D)	19 7/8 x 9 1/2 x 14 7/8" (506 x 242 x 377mm)
Net Weight (x4 pcs in each package) (lbs/kg)	14.11lbs / 6.4kg
Gross Weight (x4 pcs in each package) (lbs/kg)	18.52lbs / 8.4kg

MPPT Controller Mounting Bracket

Product Dimension (W x H x D)	8 3/4 x 3 3/8 x 3" (221 x 85 x 75mm)
Individual Packaging Dimension (W x H x D)	8 7/8 x 3 1/4 x 3 1/2" (226 x 83 x 90mm)
Master Carton Dimension (W x H x D)	18 1/2 x 10 5/8 x 14 7/8" (470 x 270 x 380mm)
Net Weight (x24 pcs in each package) (lbs/kg)	11.9lbs / 5.4kg
Gross Weight (x24 pcs in each package) (lbs/kg)	17.4lbs / 7.9kg

FSCC30PWB-BL V2.0

FSCC60PWB-BL

50A Wall Mount MPPT Solar Charge Controller With Mounting Bracket



Main Features



HIGH TRACKING
EFFICIENCY



COMPATIBLE
BATTERY SYSTEM



WORKS WITH FURRION
LIFEPO BATTERY



QUIET
COOLING FAN




AUTOMATIC
TEMPERATURE
COMPENSATION




MOUNTING BRACKET
INCLUDED
(FSCC60PWM-BL)

FURRION®

50A Wall Mount MPPT Solar Charge Controller (FSCC60PW-BL)

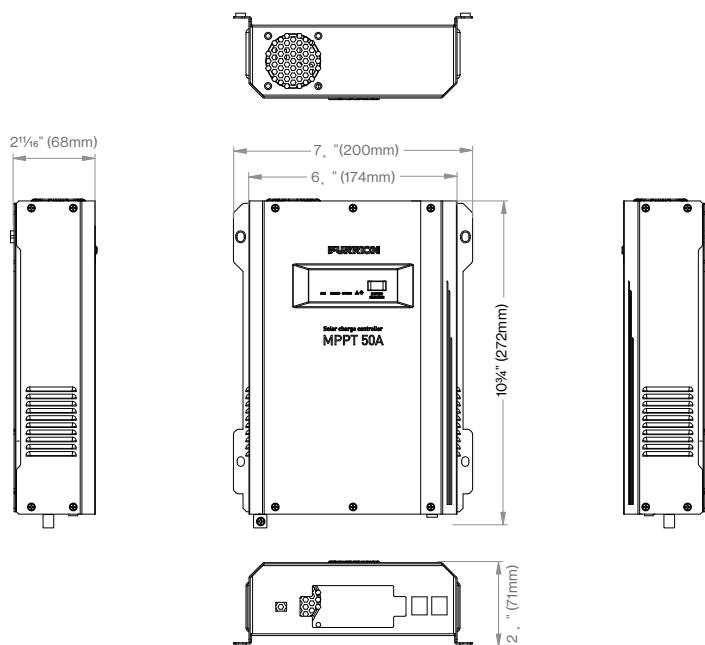

MPPT Controller Mounting Bracket (FSCC60PWM-BL)

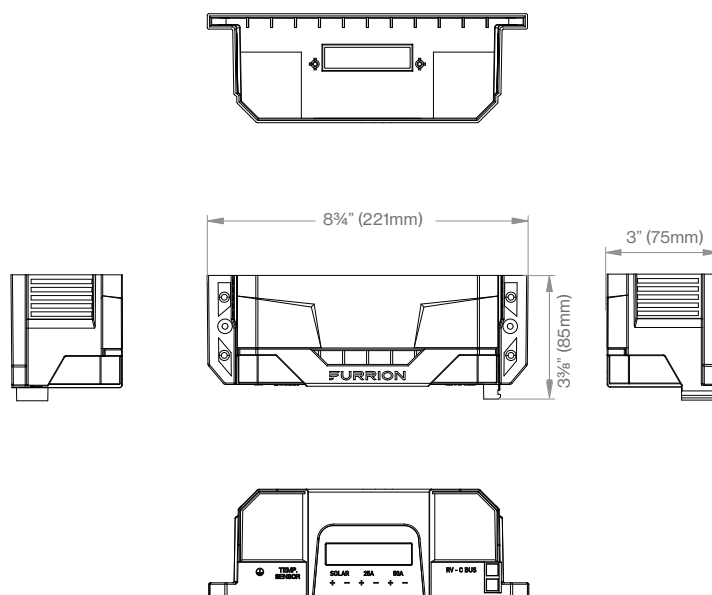

Specifications

Nominal System Voltage	12V/24V
Max. PV Power (Pmax)	600W
Max. PV Open Circuit Voltage (VOC)	135V
MPPT Tracking Efficiency	≥99%
ECO Mode Current Consumption	<1mA
Min. Battery Voltage for Charging	0Vdc
Max. Charging Current	50A
Charging Mode (three charging stage)	Bulk charging, absorption charging, float charging
Dierent Battery Mode Option	AGM, LiFePO4, Sealed lead acid
LED Indicator	√
Maximum Charging Efficiency	≥90%
Automatic Detection for 12V/24V Battery	√
Automatic Temperature Compensation	√
Battery Over Charging Protection	√
PV Reverse Protection	√
Battery Reverse Protection	√
Over Temperature Protection	√
Grounding	Common Negative
Communication Port	RV-C BUS
Operating Temperature Range	-4°F to 122°F (-20°C to 50°C)
Storage Temperature Range	-22°F to 158°F (-30°C to 70°C) 10 to 95% RH
Certificate: CSA , FCC, IC	√

Dimensions and Weight

50A Wall Mount MPPT Solar Charge Controller

Product Dimension (W x H x D)	7 7/8 x 10 3/4 x 2 7/8" (200 x 272 x 71mm)
Individual Packaging Dimension (W x H x D)	16 1/8 x 4 3/8 x 9 1/2" (409 x 111 x 243mm)
Master Carton Dimension (W x H x D)	19 7/8 x 9 1/2 x 11 1/8" (506 x 242 x 335mm)
Net Weight (x4 pcs in each package) (lbs/kg)	9.2lbs / 4.2kg
Gross Weight (x4 pcs in each package) (lbs/kg)	11.3lbs / 5.1kg

MPPT Controller Mounting Bracket

Product Dimension (W x H x D)	8 3/4 x 3 3/8 x 3" (221 x 85 x 75mm)
Individual Packaging Dimension (W x H x D)	8 7/8 x 3 1/4 x 3 1/2" (226 x 83 x 90mm)
Master Carton Dimension (W x H x D)	18 1/2 x 10 5/8 x 14 7/8" (470 x 270 x 380mm)
Net Weight (x24 pcs in each package) (lbs/kg)	11.9lbs / 5.4kg
Gross Weight (x24 pcs in each package) (lbs/kg)	17.4lbs/7.9kg

FSCC60PWB-BL V2.0



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.