

FURRION®

30" BUILT-IN ELECTRIC FIREPLACE

FF30SW15A




FF30SW15A-BL



FF30SW15A-SS



WORKS WITH
UNIMOTE



VIBRATIONSMART™



CLIMATESMART™



OVERHEATING
SAFETY CUT-OFF



SLIDE-OUT
SAFETY CUT-OFF



TEMPERATURE
CONTROL SETTINGS



HEAT UP
TO 500sq.ft



SIMULATED WOOD
WITH 4-LEVEL LED
FLAME TECHNOLOGY







TIMER

- Flame effect technology: traditional flame
- 4 flame brightness settings
- Black tempered glass front panel
- LED control board
- Temperature control
- Slide-out safety cut-off: close proximity sensor switches power off automatically
- Adjustable temperature settings from 65°F to 95°F
- Timer setting up to 5 hours
- Remote control included



FF30SW15A | 30" BUILT-IN ELECTRIC FIREPLACE

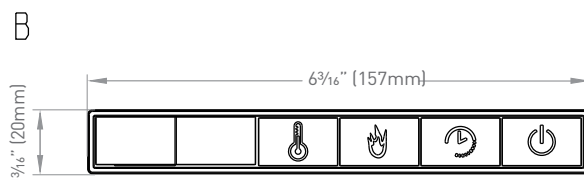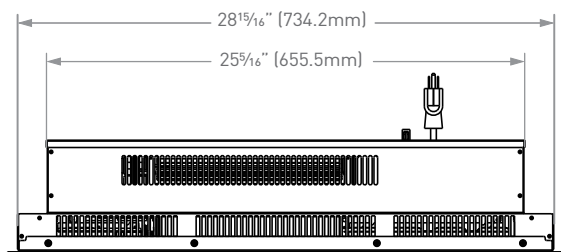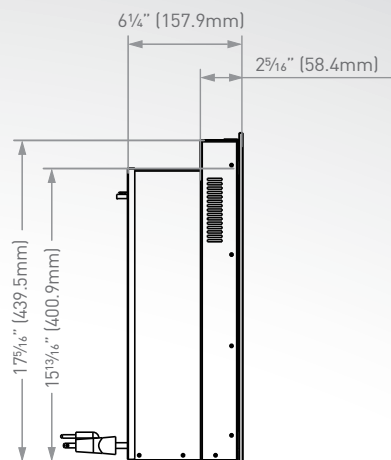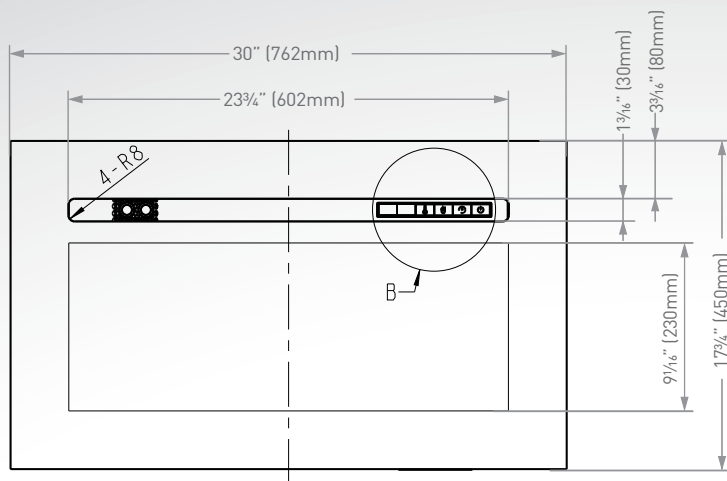

Specifications

Rated Voltage	AC 120V/60Hz
Heating Output	750W/1500W
LED Control Board	✓
Timer	✓
Log Fuel Effect	✓
Remote Type	IR

Dimensions

Product Size (W x H x D)	29 15/16" x 17 3/4" x 6 1/4" (760 x 450 x 158mm)
--------------------------	---

Packaging Information

Packaging Type	Brown Carton Box
Quantity Per Box (pcs)	1
Individual Packaging Dimensions (W x H x D)	31 3/4" x 19 1/2" x 8" (805 x 495 x 202mm)
Individual Packaging Gross Weight (kg/lbs)	16.8/37
Individual Packaging Net Weight (kg/lbs)	14.5/32

Box Container Qty

20' - Box Container Qty	344
40' - Box Container Qty	688
40'H - Box Container Qty	790

FURRION®

34" BUILT-IN ELECTRIC FIREPLACE FF34SW15A




FF34SW15A-BL



FF34SW15A-SS



WORKS WITH
UNIMOTE



VIBRATIONSMART™



CLIMATESMART™



OVERHEATING
SAFETY CUT-OFF



SLIDE-OUT
SAFETY CUT-OFF



TEMPERATURE
CONTROL SETTINGS



HEAT UP
TO 500sq.ft



SIMULATED WOOD
WITH 4-LEVEL LED
FLAME TECHNOLOGY




TIMER

- Flame effect technology: traditional flame
- 4 flame brightness settings
- Black tempered glass front panel
- LED control board
- Temperature control
- Slide-out safety cut-off: close proximity sensor switches power off automatically
- Adjustable temperature settings from 65°F to 95°F
- Timer setting up to 5 hours
- Remote control included



FF34SW15A | 34" BUILT-IN ELECTRIC FIREPLACE

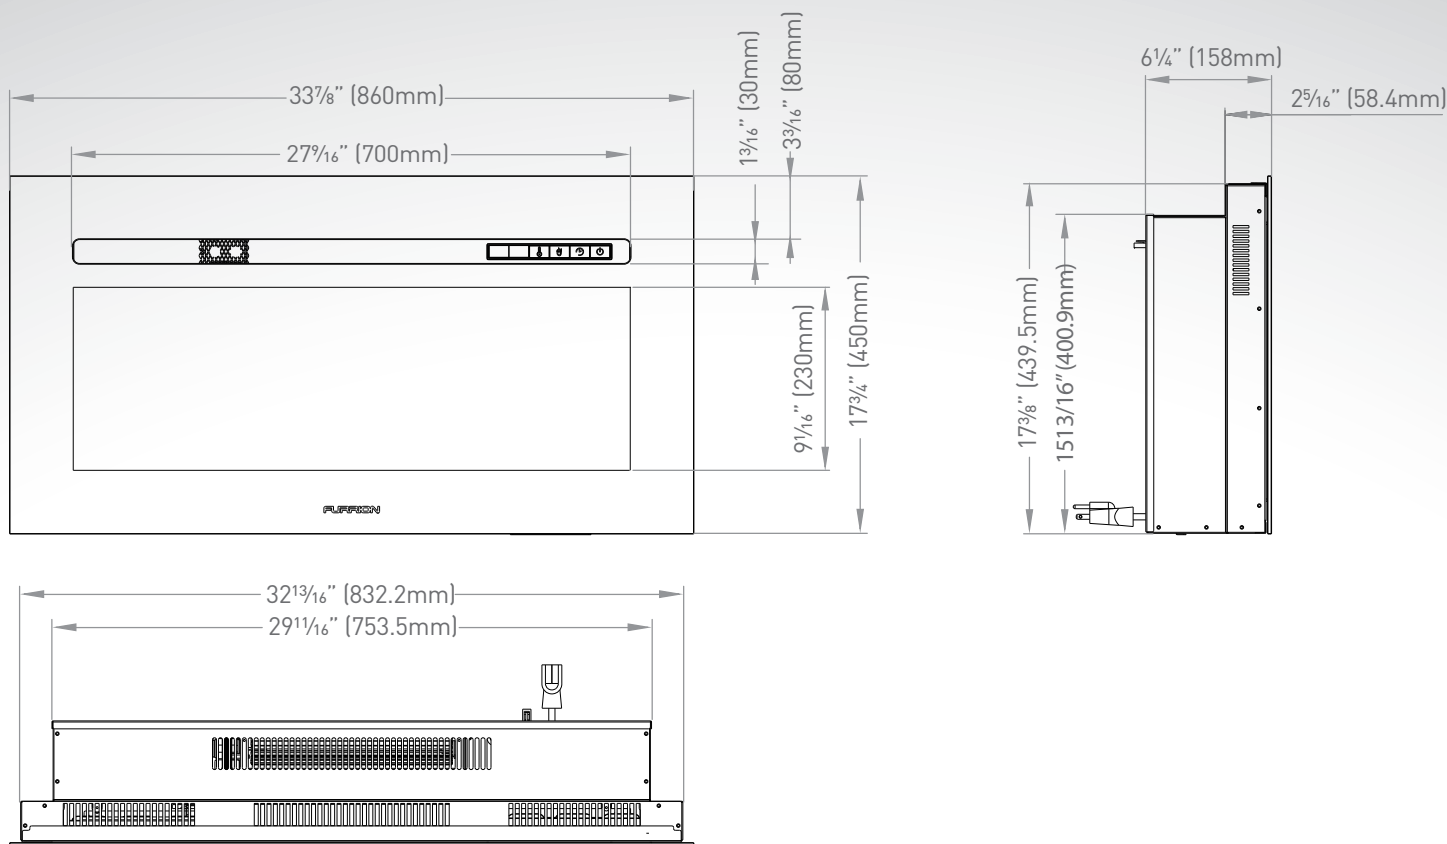

Specifications

Rated Voltage	AC 120V/60Hz
Heating Output	750W/1500W
LED Control Board	✓
Timer	✓
Log Fuel Effect	✓
Remote Type	IR

Dimensions

Product Size (W x H x D)	33 ⁷ / ₈ " x 17 ³ / ₄ " x 6 ¹ / ₄ " (860 x 450 x 158mm)
--------------------------	--

Packaging Information

Packaging Type	Brown Carton Box
Quantity Per Box (pcs)	1
Individual Packaging Dimensions (W x H x D)	35 ¹ / ₁₆ " x 19 ¹ / ₂ " x 8" (905 x 495 x 202mm)
Individual Packaging Gross Weight (kg/lbs)	20/44.1
Individual Packaging Net Weight (kg/lbs)	17/37.5

Box Container Qty


20' - Box Container Qty	300
40' - Box Container Qty	600
40'H - Box Container Qty	680

FURRION®

40" BUILT-IN ELECTRIC FIREPLACE FF40SW15A-BL



WORKS WITH
UNIMOTE



VIBRATIONSMART™



CLIMATESMART™



OVERHEATING
SAFETY CUT-OFF



SLIDE-OUT
SAFETY CUT-OFF



TEMPERATURE
CONTROL SETTINGS



HEAT UP
TO 500sq.ft



SIMULATED WOOD
WITH 4-LEVEL LED
FLAME TECHNOLOGY




TIMER

- Flame effect technology: traditional flame
- 4 flame brightness settings
- Black tempered glass front panel
- LED control board
- Temperature control
- Slide-out safety cut-off: close proximity sensor switches power off automatically
- Adjustable temperature settings from 65°F to 95°F
- Timer setting up to 5 hours
- Remote control included



FF40SW15A-BL | 40" BUILT-IN ELECTRIC FIREPLACE

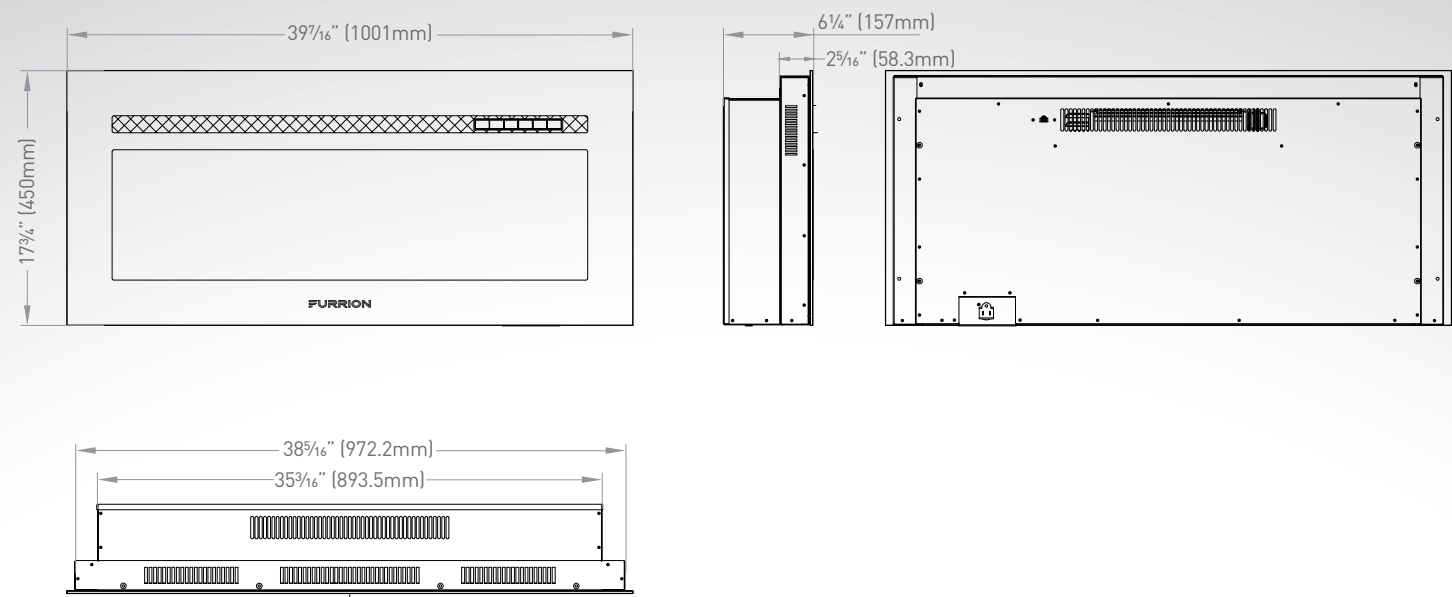

Specifications	
Rated Voltage	AC 120V/60Hz
Heating Output	750W/1500W
LED Control Board	✓
Timer	✓
Log Fuel Effect	✓
Remote Type	IR

Dimensions	
Product Size (W x H x D)	39 7/16" x 17 3/4" x 6 1/4" (1001 x 450 x 157.5mm)

Packaging Information	
Packaging Type	Brown Box
Quantity Per Box (pcs)	1
Individual Packaging Dimensions (W x H x D)	49 13/16" x 19 1/2" x 8" (1045 x 495 x 202 mm)
Individual Packaging Gross Weight (kg/lbs)	22 / 48.5
Individual Packaging Net Weight (kg/lbs)	20 / 44.1

Container Load Information	
40'HQ Container Load (pcs)	615

FURRION®

60" BUILT-IN ELECTRIC FIREPLACE FF60SW15A




FF60SW15A-BL



FF60SW15A-SS



WORKS WITH
UNIMOTE



VIBRATIONSMART™



CLIMATESMART™



OVERHEATING
SAFETY CUT-OFF



SLIDE-OUT
SAFETY CUT-OFF



TEMPERATURE
CONTROL SETTINGS



HEAT UP
TO 500sq.ft



SIMULATED WOOD
WITH 4-LEVEL LED
FLAME TECHNOLOGY




TIMER

- Flame effect technology: traditional flame
- 4 flame brightness settings
- Black tempered glass front panel
- LED control board
- Temperature control
- Slide-out safety cut-off: close proximity sensor switches power off automatically
- Adjustable temperature settings from 65°F to 95°F
- Timer setting up to 5 hours
- Remote control included



FF60SW15A | 60" BUILT-IN ELECTRIC FIREPLACE

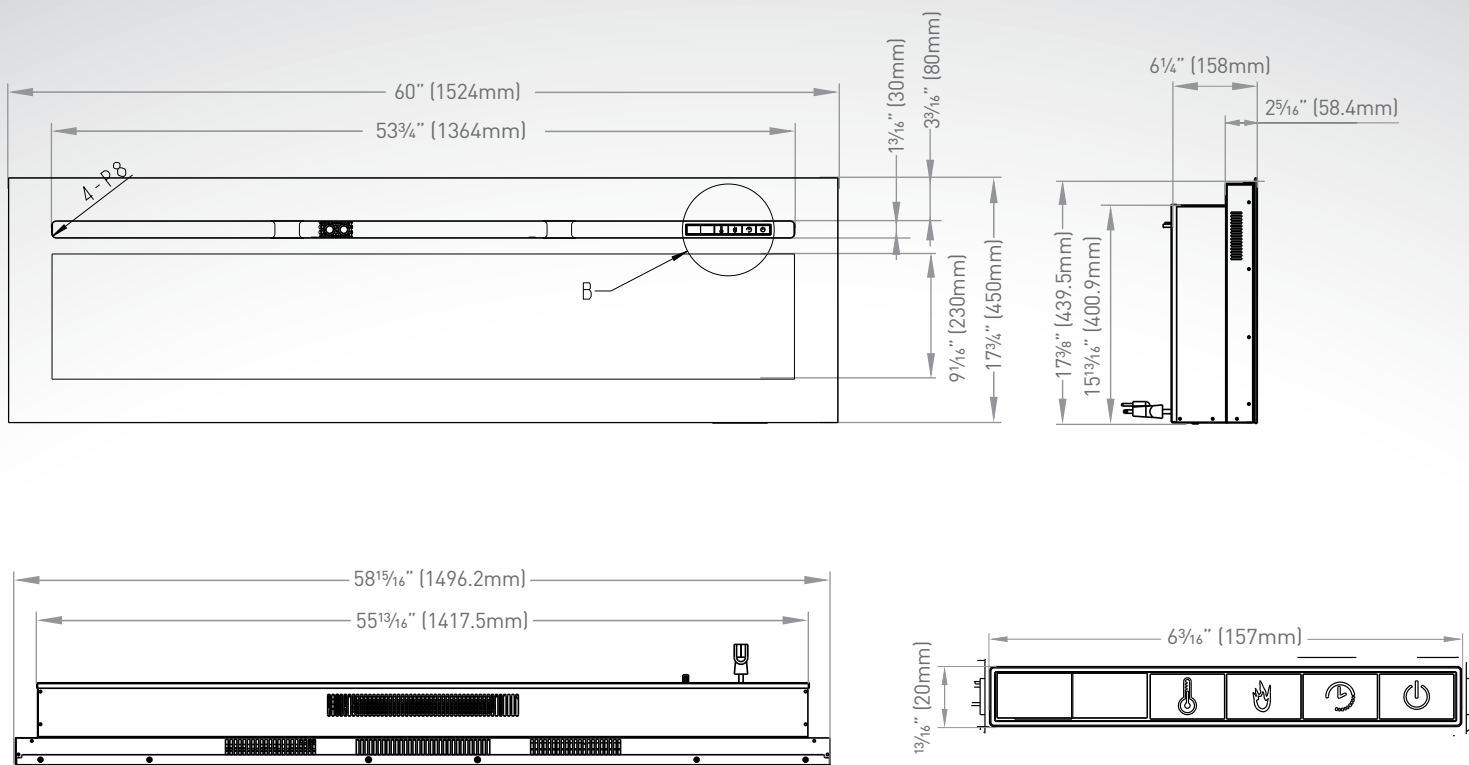

Specifications

Rated Voltage	AC 120V/60Hz
Heating Output	750W/1500W
LED Control Board	✓
Timer	✓
Log Fuel Effect	✓
Remote Type	IR

Dimensions

Product Size (W x H x D)	60" x 17 3/4" x 6 1/4"
	(1524 x 450 x 158mm)

Packaging Information

Packaging Type	Brown Carton Box
Quantity Per Box (pcs)	1
Individual Packaging Dimensions (W x H x D)	62 3/8" x 22 13/16" x 8"
	(1583 x 577 x 202mm)
Individual Packaging Gross Weight (kg/lbs)	29/64
Individual Packaging Net Weight (kg/lbs)	27/59.6

Container Load Information

45' HQ Container Load (pcs)	460
-----------------------------	-----

* Note: "✓"=Equipped



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.