

FURRION


SOUNDBAR

FSB24SA2C-BL





FSB24SA2C-BL | SOUNDBAR

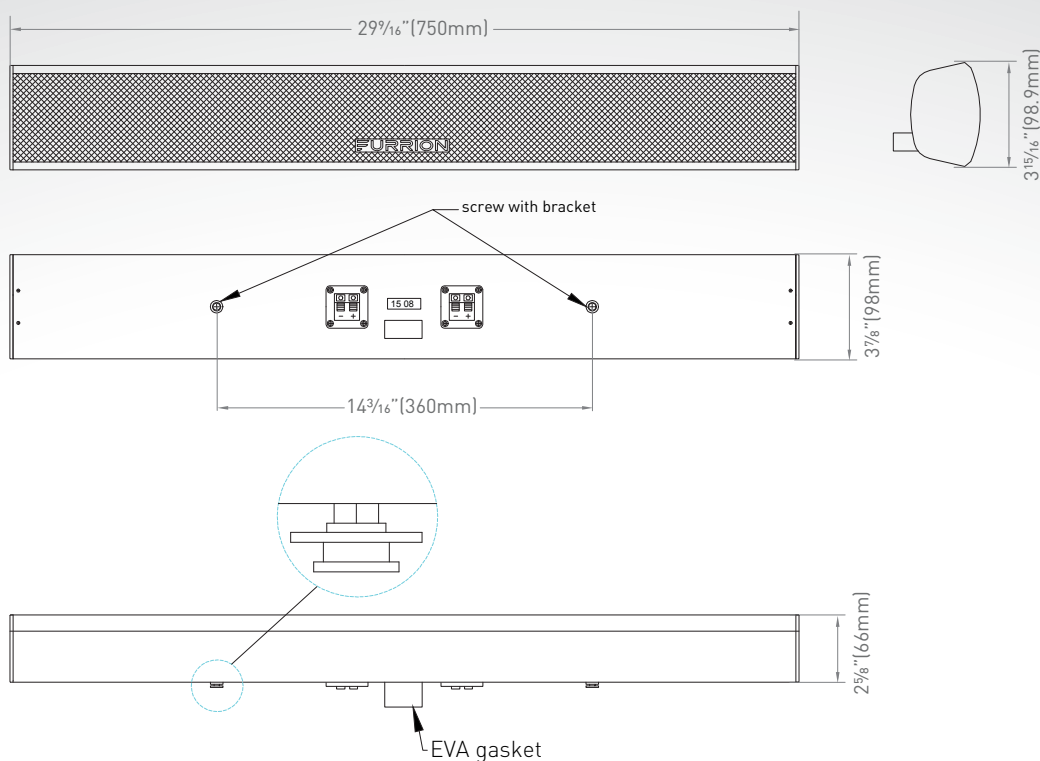

Specifications

Voice Coil DC Resistance (speaker driver)	3.2 ± 7% Ω
Voice Coil Electro Impedance (speaker driver)	4Ω@1kHz 1V
Resonance Frequency	150±20% Hz (Free space without baffle)
Output Sound Pressure Level	89±3dB @1W/m
Charateristic Sensitivity	89±3dB
Effective Frequency Band	Fo~20kHz
Power Usage	Left "+", Right "-"
Max Power	40W

Packaging Information

Packaging Type	Brown Box
Quantity Per Box (pcs)	1
Individual Packaging Dimensions (L x H x W)	30 15/16" x 5 1/8" x 3 5/8" (785 x 130 x 92mm)
Individual Packaging Gross Weight (kg/lbs)	2.0/4.4
Individual Packaging Net Weight (kg/lbs)	1.6/3.5

Master Carton

Packaging Type	Master Carton Box
Quantity Per Box (pcs)	4
Master Carton Dimensions (L x H x W)	31 1/2" x 11 1/16" x 7 7/8" (800 x 280 x 200mm)
Master Carton Gross Weight (kg/lbs)	9.0/19.8
Master Carton Net Weight (kg/lbs)	8.0/17.6



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.