

Vehicle Observation System

5" Furrion Vision S+® 3-Camera System with LED Marker Lights




Safety and Security on and off the Road

Safely back into parking spaces while having a 3-angled-view of your surroundings with the Furrion vehicle observation system. This configurable system acts as a security camera as well giving you peace of mind while on and off the road.



High-res 1080p camera leads to clear, sharp viewing in day or night



Ultra-wide angle and four views at once means a safer driving and camping experience




Easy, one-touch control to switch between camera views and adjust position

Features


- More compact monitor and slim design takes up less room for better windshield viewing
- Records video on SD card so you have a record of the most recent videos as needed
- Firmware upgrades via SD card so you always have the latest product improvements
- 5" monitor and up to four cameras for a customizable system
- Digital long-range wireless ensures your cameras maintain connection
- Microphone for added safety during backing up

Vehicle Observation System 5" Furrion Vision S+® 3-Camera System with LED Marker Lights (FOS5HTAEN)


5" Monitor

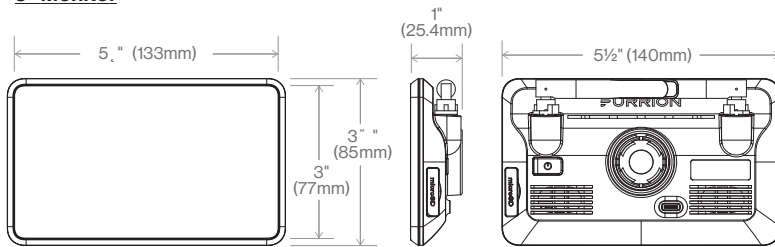

Windshield Mount

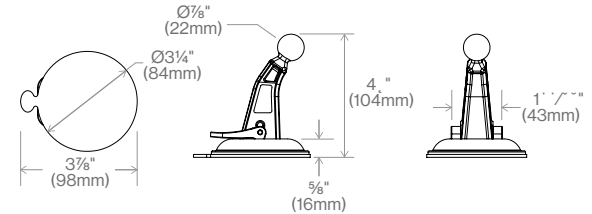

Doorway Security Camera

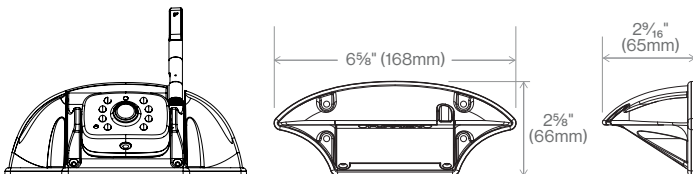

Side Camera with LED Marker Light


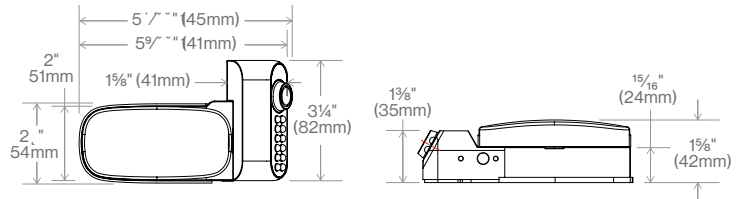


Table Stand

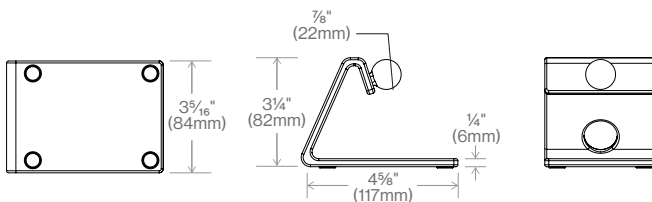

Specifications

Camera

Camera Pixel	1920 x 1080
View Angle	65°-140°
Night Vision Distance	<16ft (5m)
Waterproof	IP65
Optical Lens	Side: F1.8 Doorway Security: F2.6
CMOS Size	1/3"
IR Cut Filter	850nm Automatic
Supply Voltage	8-30VDC
Working Current (IR On)	<350mA @12VDC
Working Current (IR O°)	<200mA@12VDC

Monitor

Display Size	5"
Resolution	854 X 480
Brightness	350 cd/m ²
Contrast	CR:800
Viewing Angle	Left / Right 85°, Up 85°, Down 85°
Aspect Ratio	16:9
Memory Card Slot	Micro SD up to 128G (at least Class 10)

Recording Format	AVI, H.265
Supply Voltage	5± 0.3VDC
Working Current (Backlight On)	1000mA@5VDC
Working Current (Backlight O°)	500mA@5VDC

Camera/Monitor

Wireless Frequency	2.4GHz
Wireless Range	<492 ft (150m) (open area)
Delaying Time	<250ms
Type Approval	FCC, IC, ROHS

Dimensions and Weight

Product Dimensions (W x H x D)	See the 2D drawings for individual product dimensions
--------------------------------	---

Packaging Dimension (L x W x H)	10 x 3.3/4 x 11.1/8" (255 x 96 x 283mm)
---------------------------------	--

Gross Weight (lbs / kg)	3.4 / 1.6
Net Weight (lbs / kg)	2.4 / 1.1



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.