


GIRARD SYSTEMS AWNING
Part # GC136-CR wiring

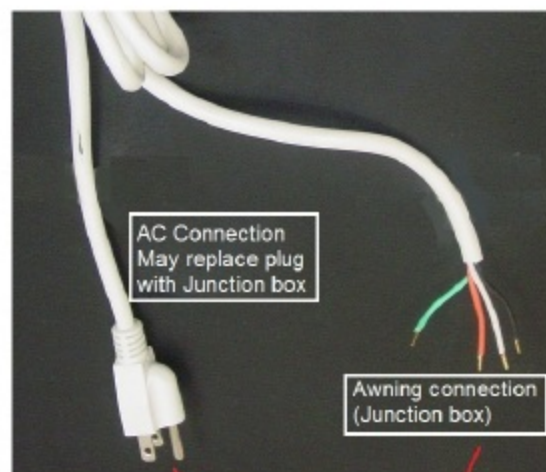

Controller connections:

Extend	Black
Retract	Red
Stop	Green (optional)
Ground	White

NOTE: These is for both Left and Right hand awnings:
For proper operation verify the position of the
"Reverse" button on the controller.
For LEFT motor mount must be to the right
For RIGHT motor mount must be to the left

Anemometer Power:
Connect to 12VDC
(Please note polarity
on label)


FROM ANEMOMETER SPITTER
ABOVE REFER

RED 18 FROM TERM 4 J1

BLK 18 FROM TERM 3 J1

@L3

PN104595



65 YEL 16

PB RED 18

GND BLK 18

BFL BLK 18

WHT 18

@K/L



TO
AWNING
SWITCH
GROUP

AWK PN104117

ROMEX 132-2A-14/2-G

AWK 18-4 SO

AWK PN104125

DRAIN

PN162426

AWK 18-4 SO

TO D/S FORWARD AWNING MOTOR

@K4 ROOF

PN104574
WATER TIGHT
MAKE-UP
BOX

TO SMU / SOMFY MOTOR

LTC

AWNING



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.