

Command Center

Part number: 00-01107-000



Description:

The Command Center from Intellitec is the most advanced and economical electronic control panel available to the RV OEM today. Designed with both style and economics in mind the Command Center provides the OEM with a lower cost alternative to a LCD touch screen and a step above the traditional convenience panels used today.



Used in conjunction with the Intellitec 00-01116-000, the Command Center can control up to six slide outs / awnings, five accessory items including lights, heaters and pump, start and stop the generator and monitor four tanks and two batteries. Two OLED graphical displays show tank and battery read outs in both text and visual formats, indicated which slide out is being controlled and whether or not the panel is locked out.

The Command Center is a sleek one piece design; it is splash resistant and is simply mounted to the wall with 4 screws. Brilliant LED backlight can be custom ordered in several colors, and our built-in ambient light sensor dims the brightness in low light conditions.

Product Features:

- Sleek, flush mount, touch sensitive panel
- Integral battery and tank monitor functions
- Up to 6x 30A Slide-Out outputs
- 3 x 5A SPDT relay outputs
- 2 x 5A SPST relay outputs
- 1 x 5A Generator Start output
- 1 x 5A Generator Stop output
- 4 x 4-level resistive tank level sensor inputs.
- 1 x 0-90Ω or 240-33Ω tank level sensor input (Configurable)
- 1 x remote battery level input
- 4 x configurable switch inputs



Environmental:

Operating temp: -40/50 deg C (-40/122 deg F)

Storage temp: -40/105 deg C (-40/221 deg F)

Intrusion: Front: Splash proof

Rear: None

Agency approvals: None

<u>Electrical Specifications</u>	<u>Unit</u>	<u>Min</u>	<u>Typ</u>	<u>Max</u>
----------------------------------	-------------	------------	------------	------------

Panel Supply

Operating supply voltage	V	5	12	16
--------------------------	---	---	----	----

Overvoltage Protection	V			-36
------------------------	---	--	--	-----

Quiescent Current Draw	mA			25
------------------------	----	--	--	----

Slide-Outs

Switched voltage	V		12	16
------------------	---	--	----	----

Switched Current	A			16
------------------	---	--	--	----

Circuit run time (Configurable)	sec		30	
---------------------------------	-----	--	----	--

Reverse delay time (Configurable)	sec		10	
-----------------------------------	-----	--	----	--

Switched Outputs

Switched voltage	V		12	16
------------------	---	--	----	----

Switched Current	A			5
------------------	---	--	--	---

Generator Interface Output

Mode	Two wire maintained			
------	---------------------	--	--	--

Switched voltage	V		12	16
------------------	---	--	----	----

Switched Current	A			5
------------------	---	--	--	---

Remote Battery Sense Input

Voltage range:	V	1		16
----------------	---	---	--	----

Input resistance:	Ω		227K	
-------------------	---	--	------	--

Tank Level Inputs

Tank Level Sensor (Tanks 1-4):	120KΩ/68KΩ Style Tank Sensor			
--------------------------------	------------------------------	--	--	--

Tank Level Sensor ("LPG" input):	0-90Ω or 240-33Ω (Software configurable)			
----------------------------------	--	--	--	--



Mechanical Specifications:

Dimensions: 9.5 H x 7.5 W x 0.25 D (in.)
241.3 H x 190.5 W x 6.35 D (mm)

Connectors: J1, 18-way Molex Mini-Fit Jr, Mating Part #: 0039012185


- | | |
|-------------------|--------------------|
| 1. Tank 1 Input | 10. Input 3 |
| 2. Tank 2 Input | 11. Input 2 |
| 3. Tank 3 Input | 12. Input 1 |
| 4. Tank 4 Input | 13. Relay 7 NO |
| 5. Relay 1 NO | 14. Relay 7 Common |
| 6. Relay 1 NC | 15. Relay 5 NO |
| 7. Relay 1 Common | 16. Relay 5 Common |
| 8. Relay 6 NO | 17. Ground |
| 9. Relay 6 Common | 18. VBAT |

J2, 16-way Molex Mini-Fit Jr, Mating Part #: 0039012160

- | | |
|------------------------------|--------------------|
| 1. Battery 2 | 9. Relay 2 Common |
| 2. RS-232 TX (Configuration) | 10. Relay 2 NO |
| 3. RS-232 RX (Configuration) | 11. Relay 2 NC |
| 4. Ground | 12. Relay 3 NO |
| 5. CAN L | 13. Relay 3 Common |
| 6. CAN H | 14. Relay 4 Common |
| 7. LPG Tank | 15. Relay 4 NC |
| 8. Input 4 | 16. Relay 4 NO |



Mounting Specifications:

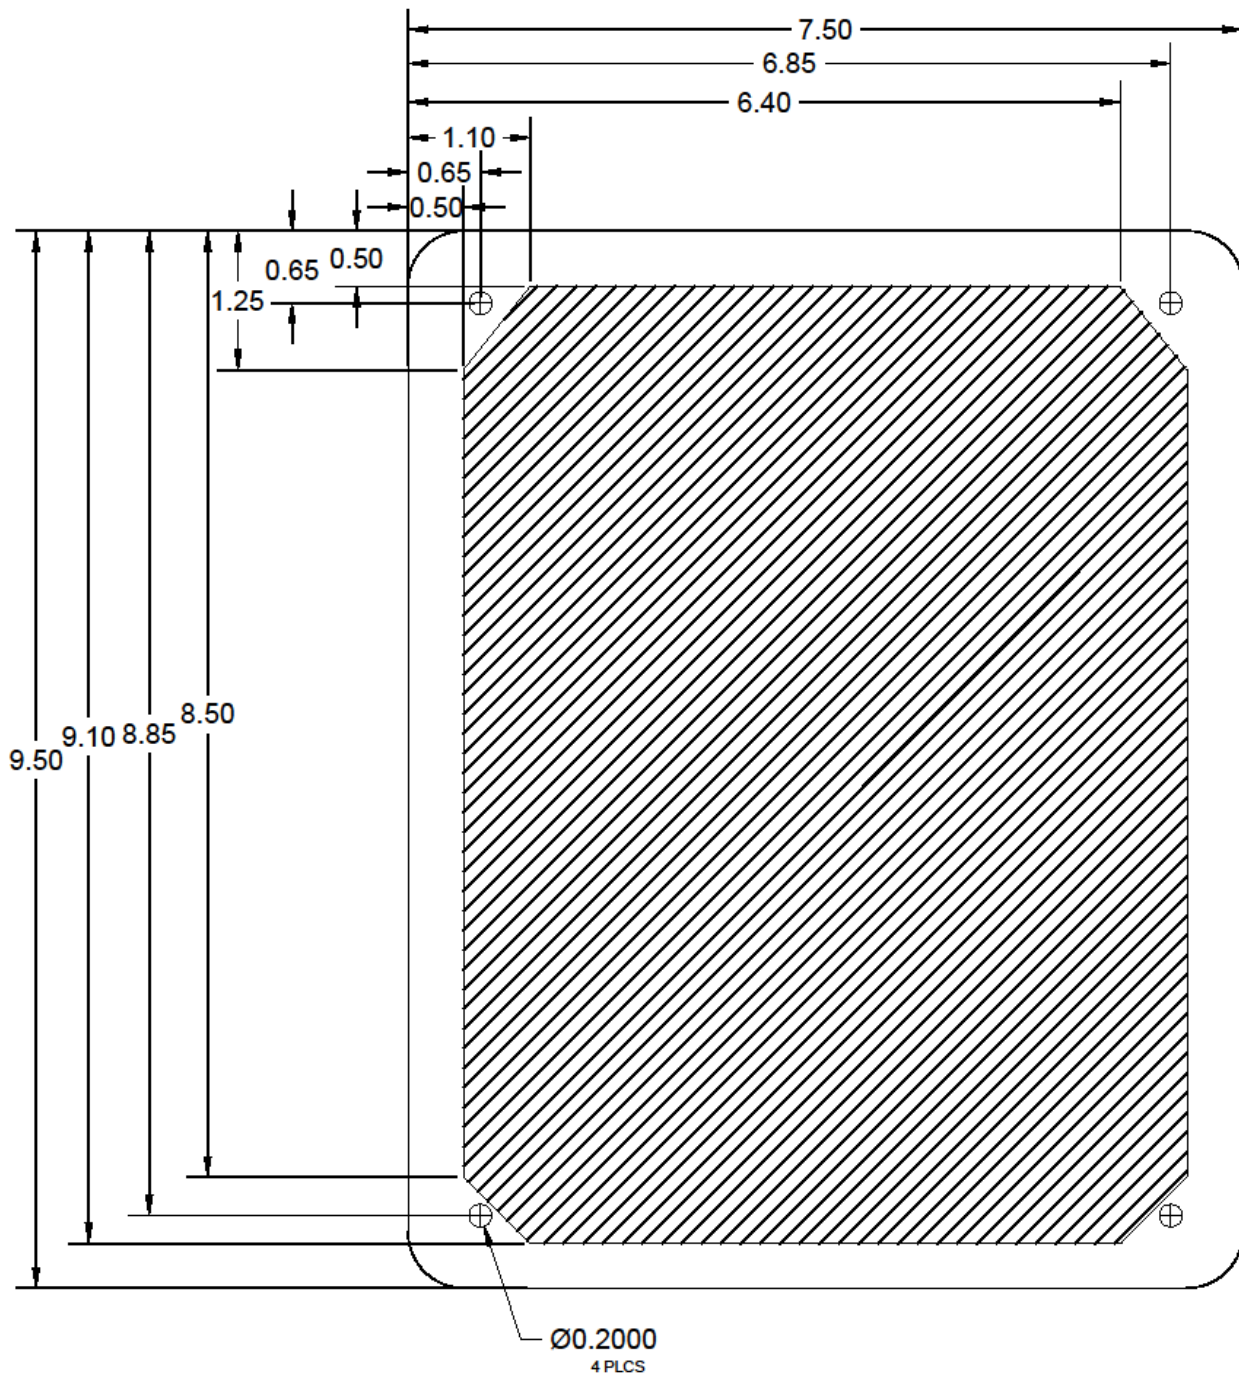

All dimensions are in inches and are recommended. (Not to scale)

The cutout area represented by the hatch pattern is required for making connections and providing clearance for electrical components.



Available Product Literature and Guides:

Brochure:	53-01107-000
Product Specification:	53-01107-001
User's Guide:	53-01107-100
Installation and Applications:	53-01107-200
Supporting Documents:	53-01107-300

Contact Information: www.intellitec.com

Intellitec Products, LLC 1485 Jacobs Road, DeLand Florida, USA 32724
(386) 738-7307





This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.