


ELECTRONIC CLIMATE CONTROL

Temperature Probe

SERVICE BULLETIN

To minimize large temperature swings in the motor home.

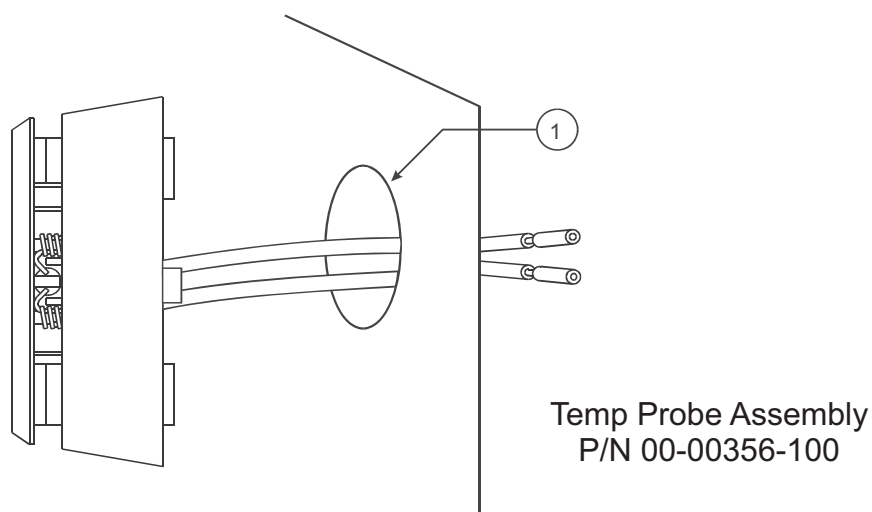

Recommended Mounting

- 1) Wire feed-thru hole in mounting surface must be sealed with RTV caulk, or gasket.
- 2) Splice wires from the Temp. Probe assembly (00-00356-100) together with the wires coming out of the wall. Polarity is NOT important.
- 3) Push wires back into wall and screw the assembly into place.
- 4) Mount in a place where ambient temperature will likely be sensed.
- 5) Can be mounted on an internal wall, under cabinet or counter-top (**NOT** an external wall, or inside a cabinet).
Mount at least 6 inches from any external surface and 24 inches from the floor.
DO NOT mount inside a closet, or next to any heat generating appliance.



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.