


FADE-OUT INTERIOR LIGHT DELAY

INSTALLATION INSTRUCTIONS

Installation on Ford Vehicles (High Side or Positive Switching)

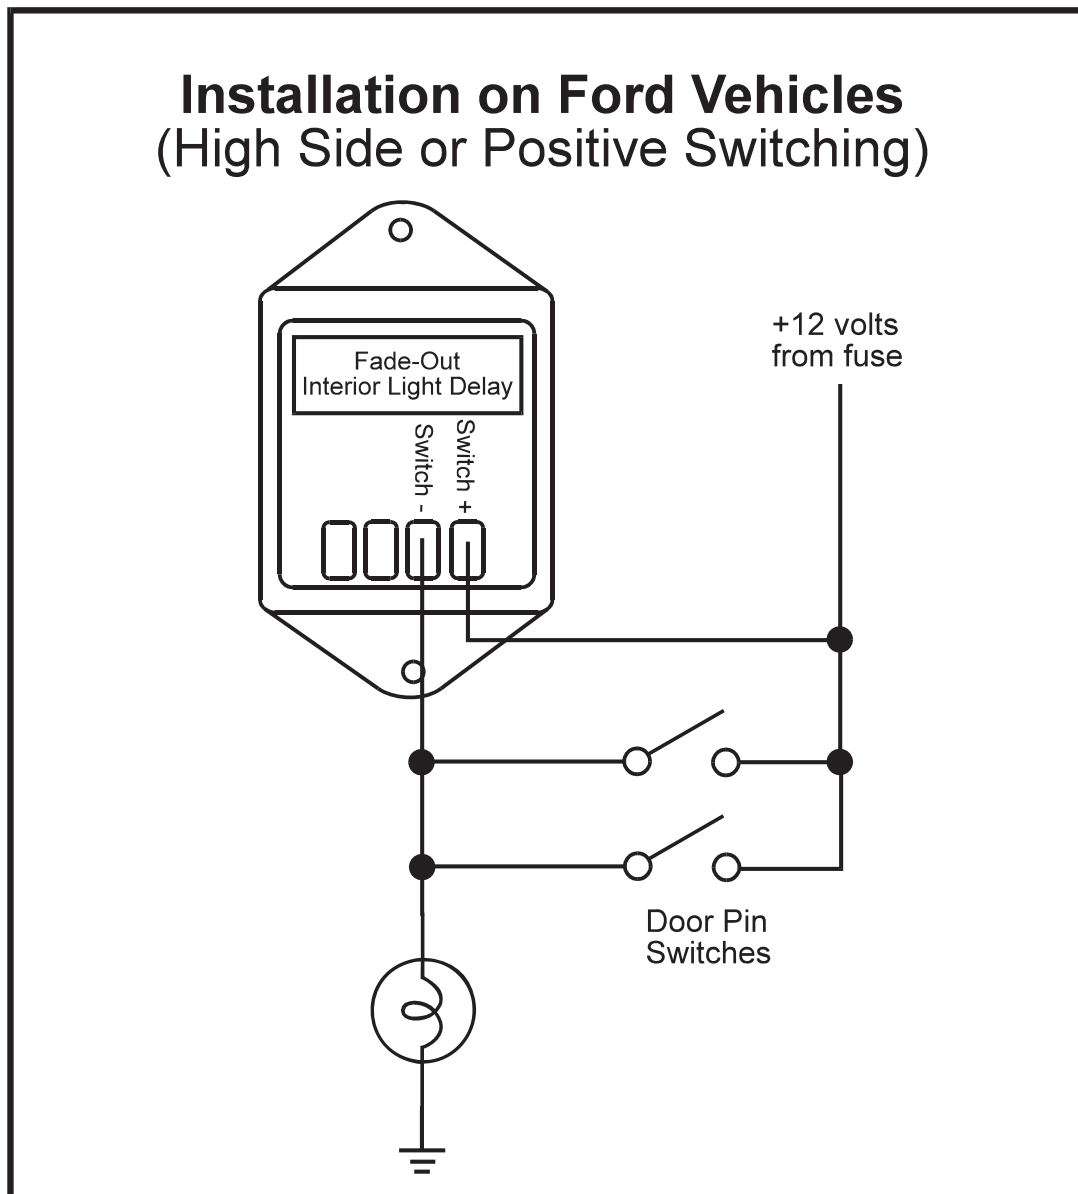


To Install the **Interior Light Delay** in a Ford vehicle, first disconnect the negative battery cable to prevent any damage to the wiring. Locate the two wires from any door pin switch (This can usually be done by removing the driver's or passenger's side kick panel.) and splice and tape a wire to each of these switch wires. *Do not cut the switch wire.* Crimp a 1/4" slip on connector to each of these wires and connect them to the Interior Light Delay module.

Re-connect the battery and close the all doors. The lights should come on and then go out in about 7 seconds. If they don't, reverse the connections to the module. Check the taped joints to be sure they are completely insulated and then replace the kick panel.

FADE-OUT INTERIOR LIGHT DELAY

INSTALLATION INSTRUCTIONS

Installation on GM or Chrysler Vehicles (Low Side or Negative Switching)

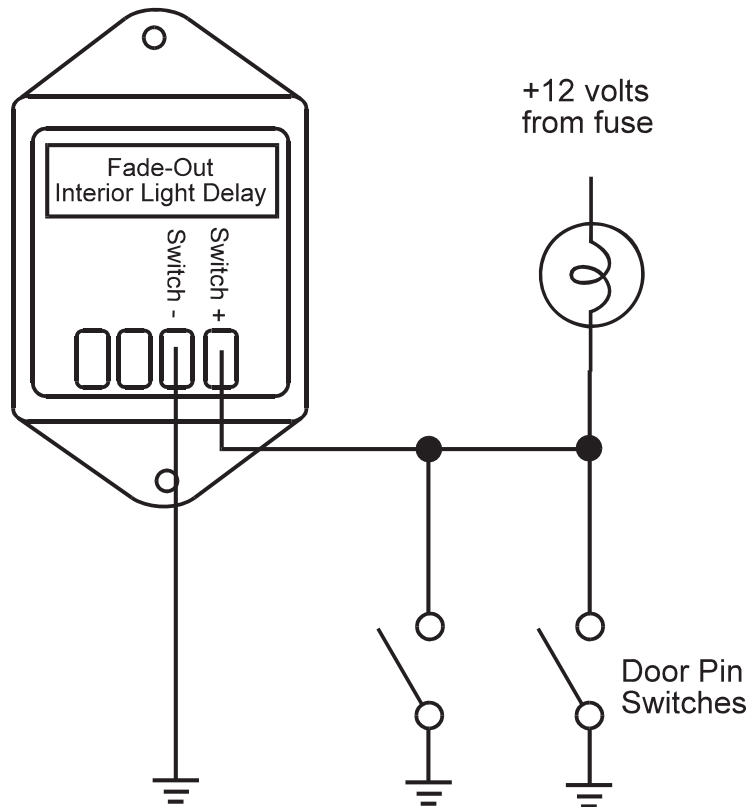


To Install the **Interior Light Delay** in a GM or Chrysler vehicle, first disconnect the negative battery cable to prevent any damage to the wiring. Locate the wire/s from any door pin switch (This can usually be done by removing the driver's or passenger's side kick panel.) and splice and tape a wire to the switch wire. *Do not cut the switch wire.* Crimp a 1/4" slip on connector to this wire and connect it to the **Switch +** terminal on the Interior Light Delay. Using another 1/4" slip on connector, connect another wire to the **Switch -** terminal of the module and connect the other end of this wire to a convenient ground.

Re-connect the battery and close the all doors. The lights should come on and then go out in about 7 seconds. Check the taped joint to be sure it is completely insulated and then replace the kick panel.

FADE-OUT INTERIOR LIGHT DELAY

INSTALLATION INSTRUCTIONS

Installation on GM or Chrysler Vehicles (Low Side or Negative Switching)

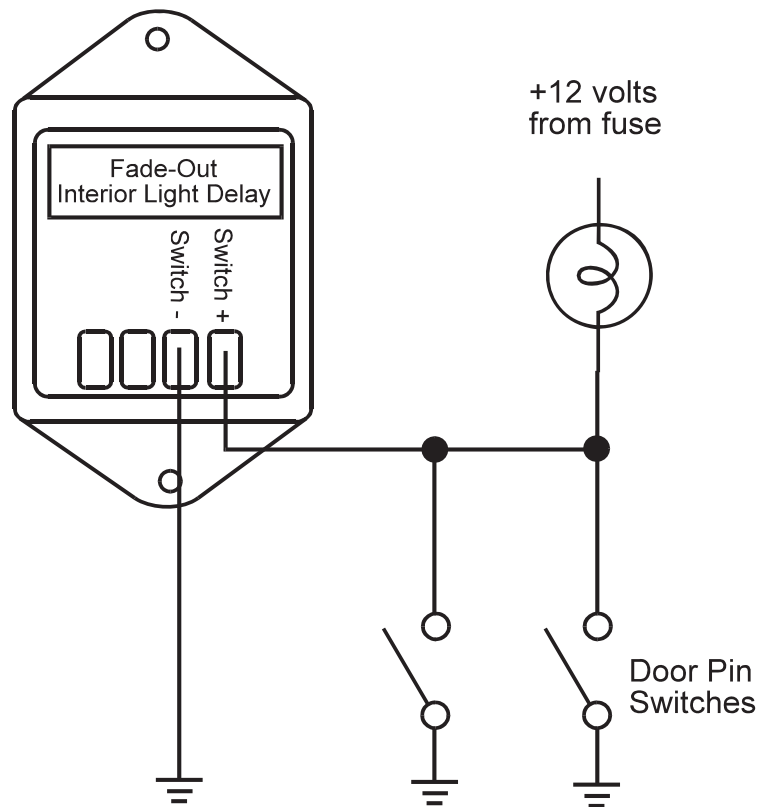

To Install the **Interior Light Delay** in a GM or Chrysler vehicle, first disconnect the negative battery cable to prevent any damage to the wiring. Locate the wire/s from any door pin switch (This can usually be done by removing the driver's or passenger's side kick panel.) and splice and tape a wire to the switch wire. *Do not cut the switch wire.* Crimp a 1/4" slip on connector to this wire and connect it to the Source terminal on the Interior Light Delay. Using another 1/4" slip on connector, connect another wire to the Load terminal of the Interior Light delay and connect the other end of this wire to a convenient ground.

Re-connect the battery and close the all doors. The lights should come on and then go out in about 7 seconds. Check the taped joint to be sure it is completely insulated and then replace the kick panel.

FADE-OUT INTERIOR LIGHT DELAY

INSTALLATION INSTRUCTIONS



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.