



Recall Campaign

NHTSA#: 16V-560

TC#: 2016-380

Date of Publication: August 2016

WARNING



DO NOT TOW YOUR TRAILER UNTIL THE SWAY COMMAND SYSTEM IS DISCONNECTED

INSTRUCTIONS TO DISCONNECT THE SWAY COMMAND



- 1 **Fig 1:** Locate the Sway Command control box on the front crossmember of the trailer.

Fig 2: On some trailers, the Sway Command control is behind a front panel and can be accessed from underneath the propane tanks.

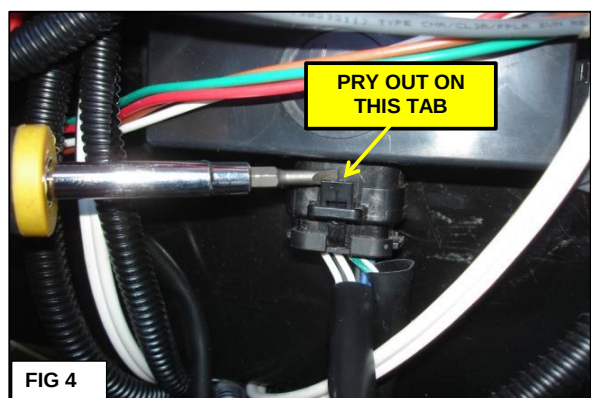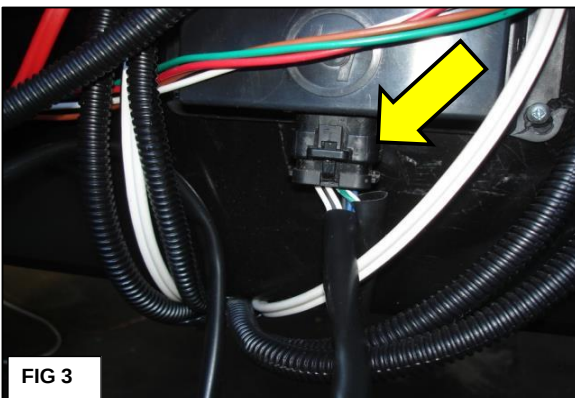

- 2 **Fig 3:** Locate the harness connector at the bottom of the Sway Command control box.

Fig 4: Press outward on the tab of the connector using a flat blade screwdriver.

Unplug the connector from the Sway Command control box. Secure to other wiring with a wire tie.

For assistance please contact Jayco Customer Service at 800-283-8267 or a Jayco Dealer.



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.