

WINDOWS

Purpose

This document outlines the procedure for adding additional sealant to LCI 8800 Series Exit Windows installed on a sloped surface.

Safety

Read and understand all instructions before installing or operating this product. Adhere to all safety labels.

⚠ CAUTION

Always wear eye protection when performing service, maintenance or installation procedures. Other safety equipment to consider would be hearing protection, gloves and possibly a full face shield, depending on the nature of the task.


⚠ CAUTION

Moving parts can pinch, crush or cut. Keep clear and use caution.

Resources Required

- 100 percent silicone sealant

Fig. 1

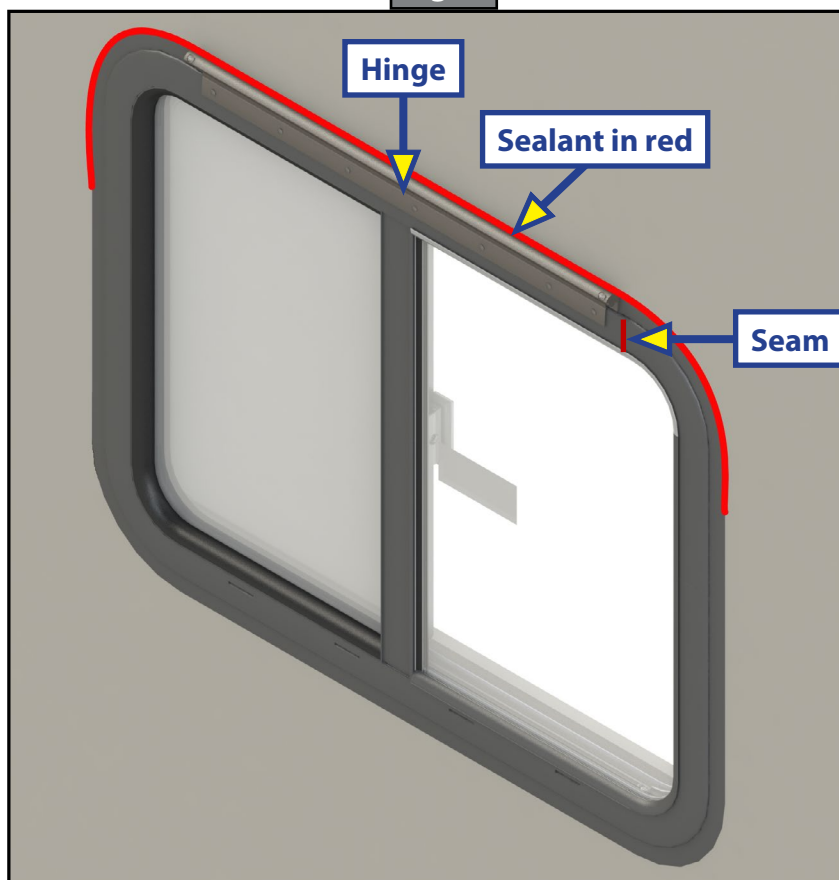



8800 SERIES WINDOW TOP SEAM SEAL FIX

TI-367

WINDOWS

Procedure

1. Apply silicone sealant on the exterior side of the window, on top of the hinge on the outer frame (Fig.1).
2. Apply silicone sealant around the radius of the window extending 3-4" past the radius (Fig.1).
3. Apply silicone sealant at frame seam of the window frame (Fig. 1).

As a supplier of components to the RV industry, safety, education and customer satisfaction are our primary concerns. Should you have any questions, please do not hesitate to contact us at (574) 537-8900 or by email at customerservice@lci1.com. Self-help tips, technical documents, product videos and a training class schedule are available at lci1.com or by downloading the MyLCI app.



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.