


AXLES AND SUSPENSION

Fig. 1

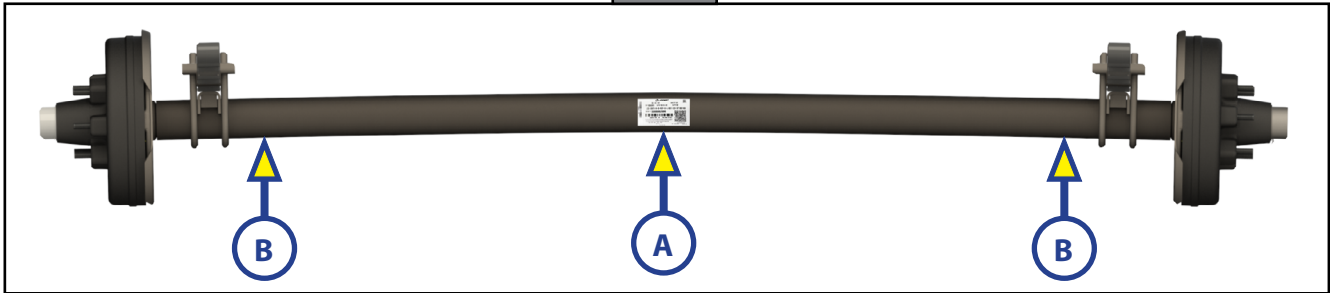

To properly mount the Lippert axle to the trailer frame, basic criteria **MUST** be met:

1. Camber must be oriented in the UP position. The center of the axle beam (Fig. 1A) must be higher than the ends of the beam (Fig.1B).
2. Electric Brakes will have the magnet lead wires (Fig. 2A) exiting the Backing Plate on the rear of the axle.
3. The wiring for the brakes (Fig. 2B) protruding from the axle tube must be oriented to the rear of the trailer.
4. An oval adjuster slot (Fig. 2C) must be located at the bottom of the axle.
5. The spring clip (Fig. 3A) must be oriented to the front of the trailer.
6. Silver Axle ID Tag (Fig. 4) must be located on the backside of the axle tube.

Fig. 2

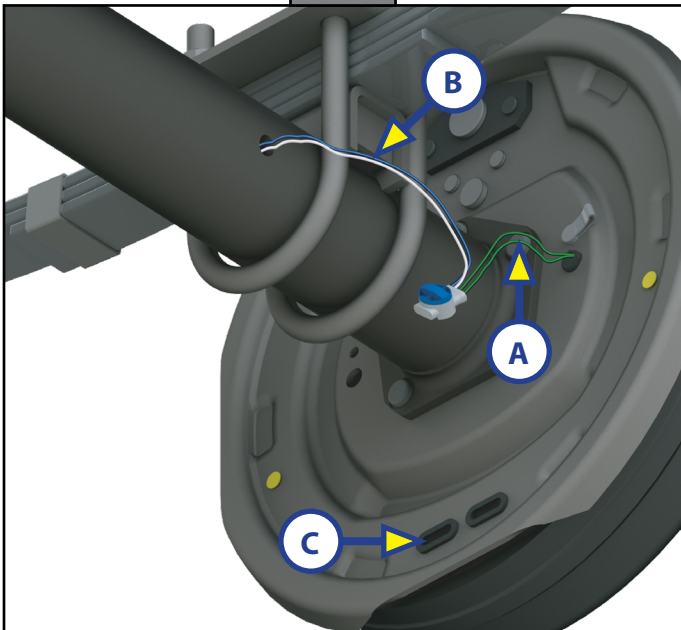


Fig. 3


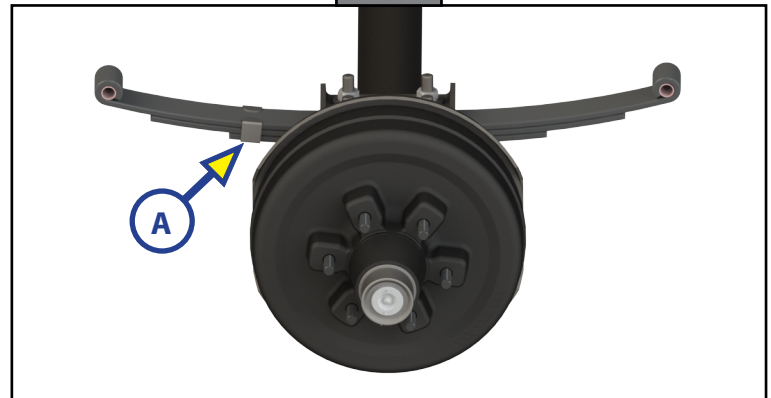


Fig. 4





This manual is provided courtesy of **RV Tech Cheat Sheet**

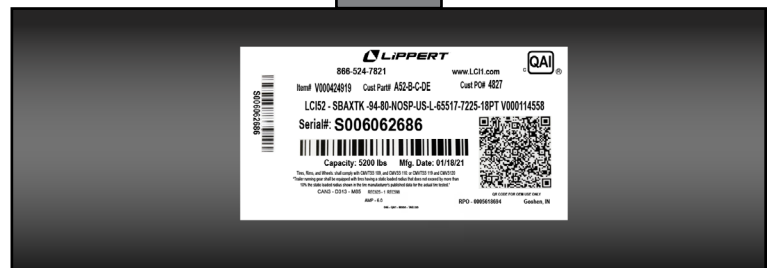

Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.