



COMPACT FLYSCREEN OEM INSTALLATION MANUAL

TABLE OF CONTENTS

Introduction	2
Safety	2
Resources Required	2
Installation	3
Post Installation Check	5

Introduction

The flyscreen door system keeps out insects and debris while allowing fresh airflow. The flyscreen can only be used while the coach's door is open. Open the flyscreen door before closing the coach's door.

For information on the assembly or individual components of this product, please visit:

<https://support.lci1.com/entry-doors>.

NOTE: Images used in this document are for reference only when assembling, installing and/or operating this product. Actual appearance of provided and/or purchased parts and assemblies may differ.

Safety

Read and understand all instructions before installing or operating this product. Adhere to all safety labels.

This manual provides general instructions. Many variables can change the circumstances of the instructions, i.e., the degree of difficulty, operation and ability of the individual performing the instructions. This manual cannot begin to plot out instructions for every possibility, but provides the general instructions, as necessary, for effectively interfacing with the device, product or system. Failure to correctly follow the provided instructions may result in death, serious personal injury, severe product and/or property damage, including voiding of the LCI limited warranty.

WARNING

The "WARNING" symbol above is a sign that a procedure has a safety risk involved and may cause death or serious personal injury if not performed safely and within the parameters set forth in this manual.

WARNING

Failure to follow instructions provided in this manual may result in death, serious personal injury and/or severe product and property damage, including voiding of the component warranty.

CAUTION

The "CAUTION" symbol above is a sign that a safety risk is involved and may cause personal injury and/or product or property damage if not safely adhered to and within the parameters set forth in this manual.

CAUTION

Always wear eye protection when performing service, maintenance or installation procedures. Other safety equipment to consider would be hearing protection, gloves and possibly a full face shield, depending on the nature of the task.


Resources Required

- 1-2 People, depending on task
- Cordless or electric drill or screw gun
- Appropriate drive bits
- OEM-supplied screws
- OEM-supplied spacers

Installation


1. Position the retracted flyscreen portion of the screen door over the wall and place the bottom rail of the screen door on the floor (Fig. 1).
2. Center the flyscreen door within the coach's door opening.
 - A. Make sure the side of the latch door—where the inner side of the spacer profile is located—is next to but **NOT** on it.
 - B. At the same time, make sure that on the other side of the cutout the flyscreen is next to the gasket and **NOT** on it.
 - C. Then make sure the whole back part of the flyscreen touches the wall.
 - D. Make sure each corner between profiles is perpendicular (90 degrees) (Fig. 1).

Fig. 1

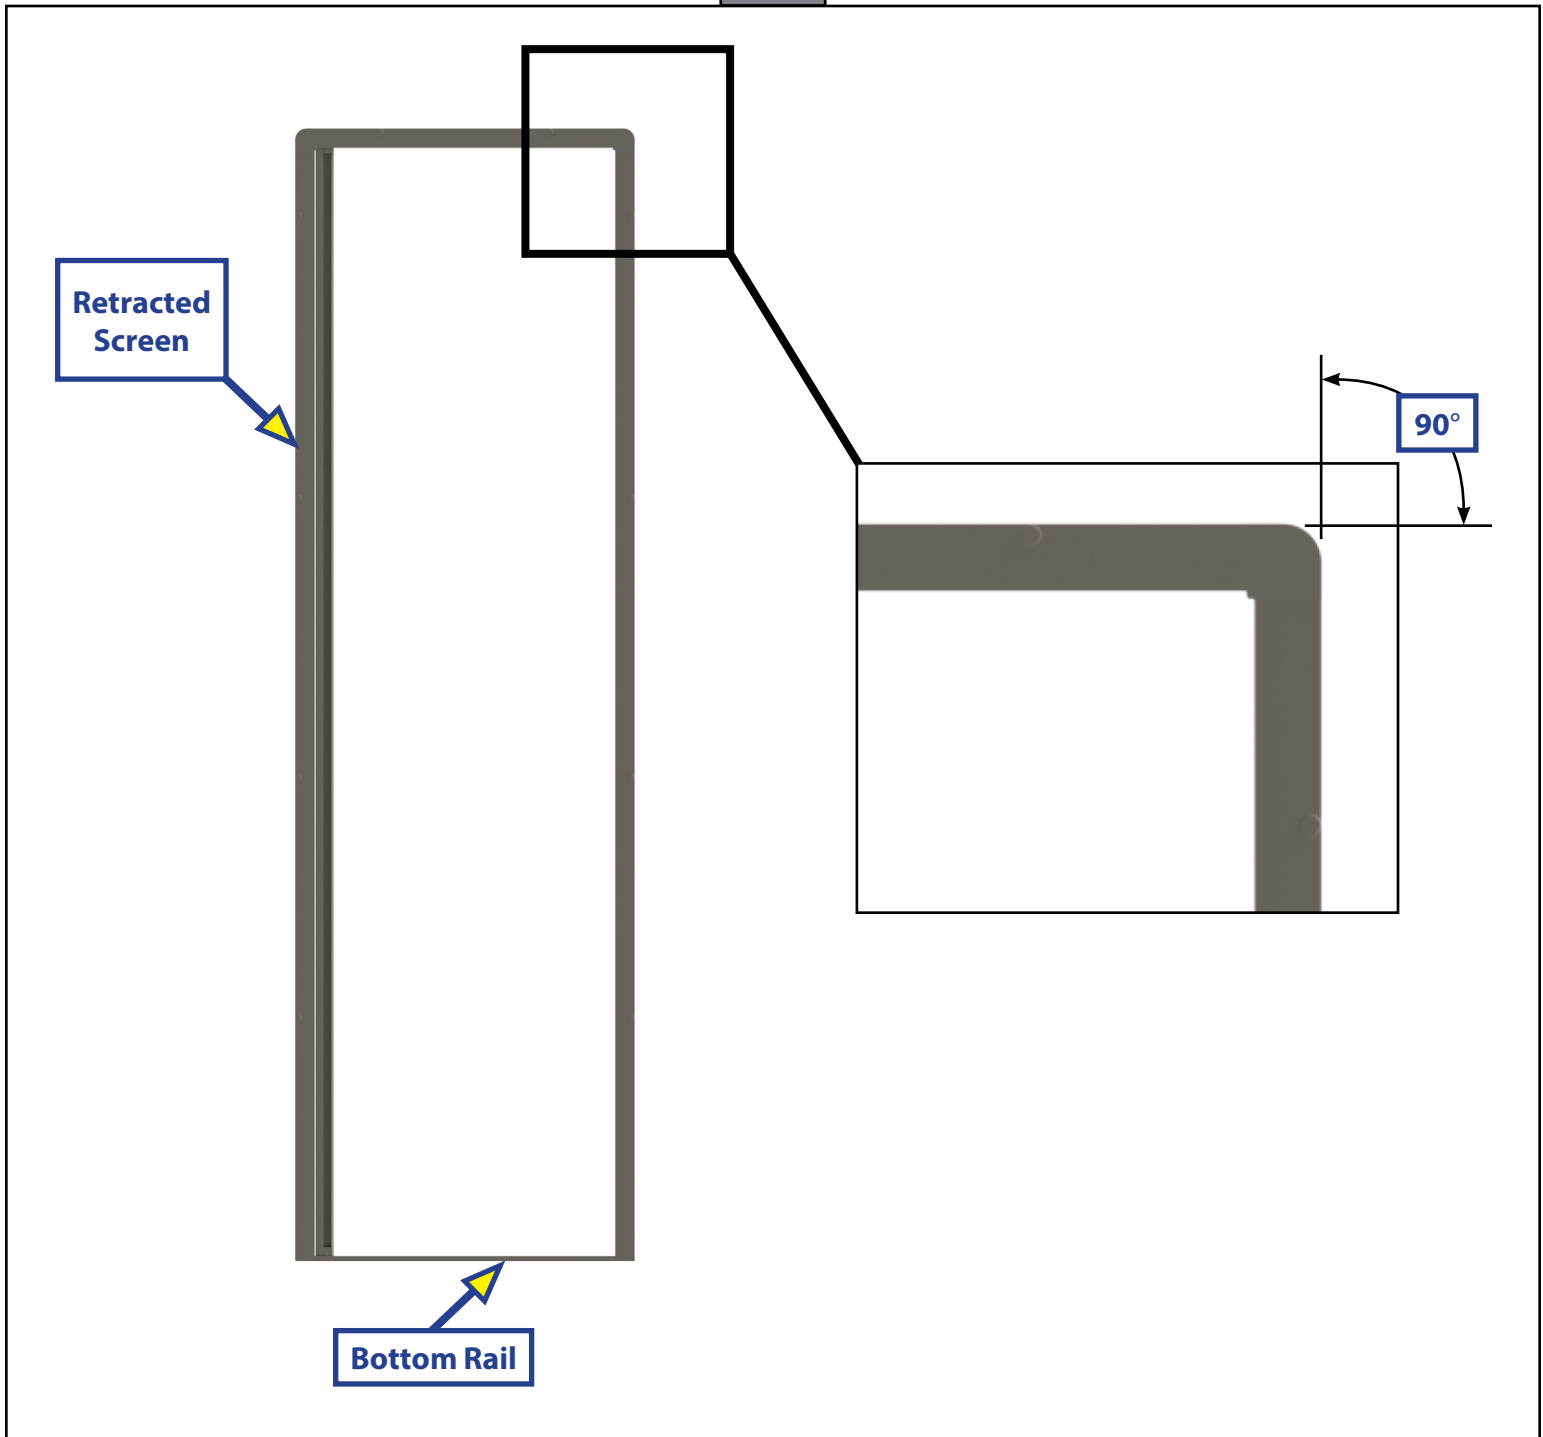

3. Install 10 OEM-supplied screws (1-10) in the order shown in figure 2.
 - A. At screw locations 5-8 (Fig. 2), the flyscreen door material tends to move out of position. Apply enough pressure to those mounting areas to keep the profile straight.

Fig. 2

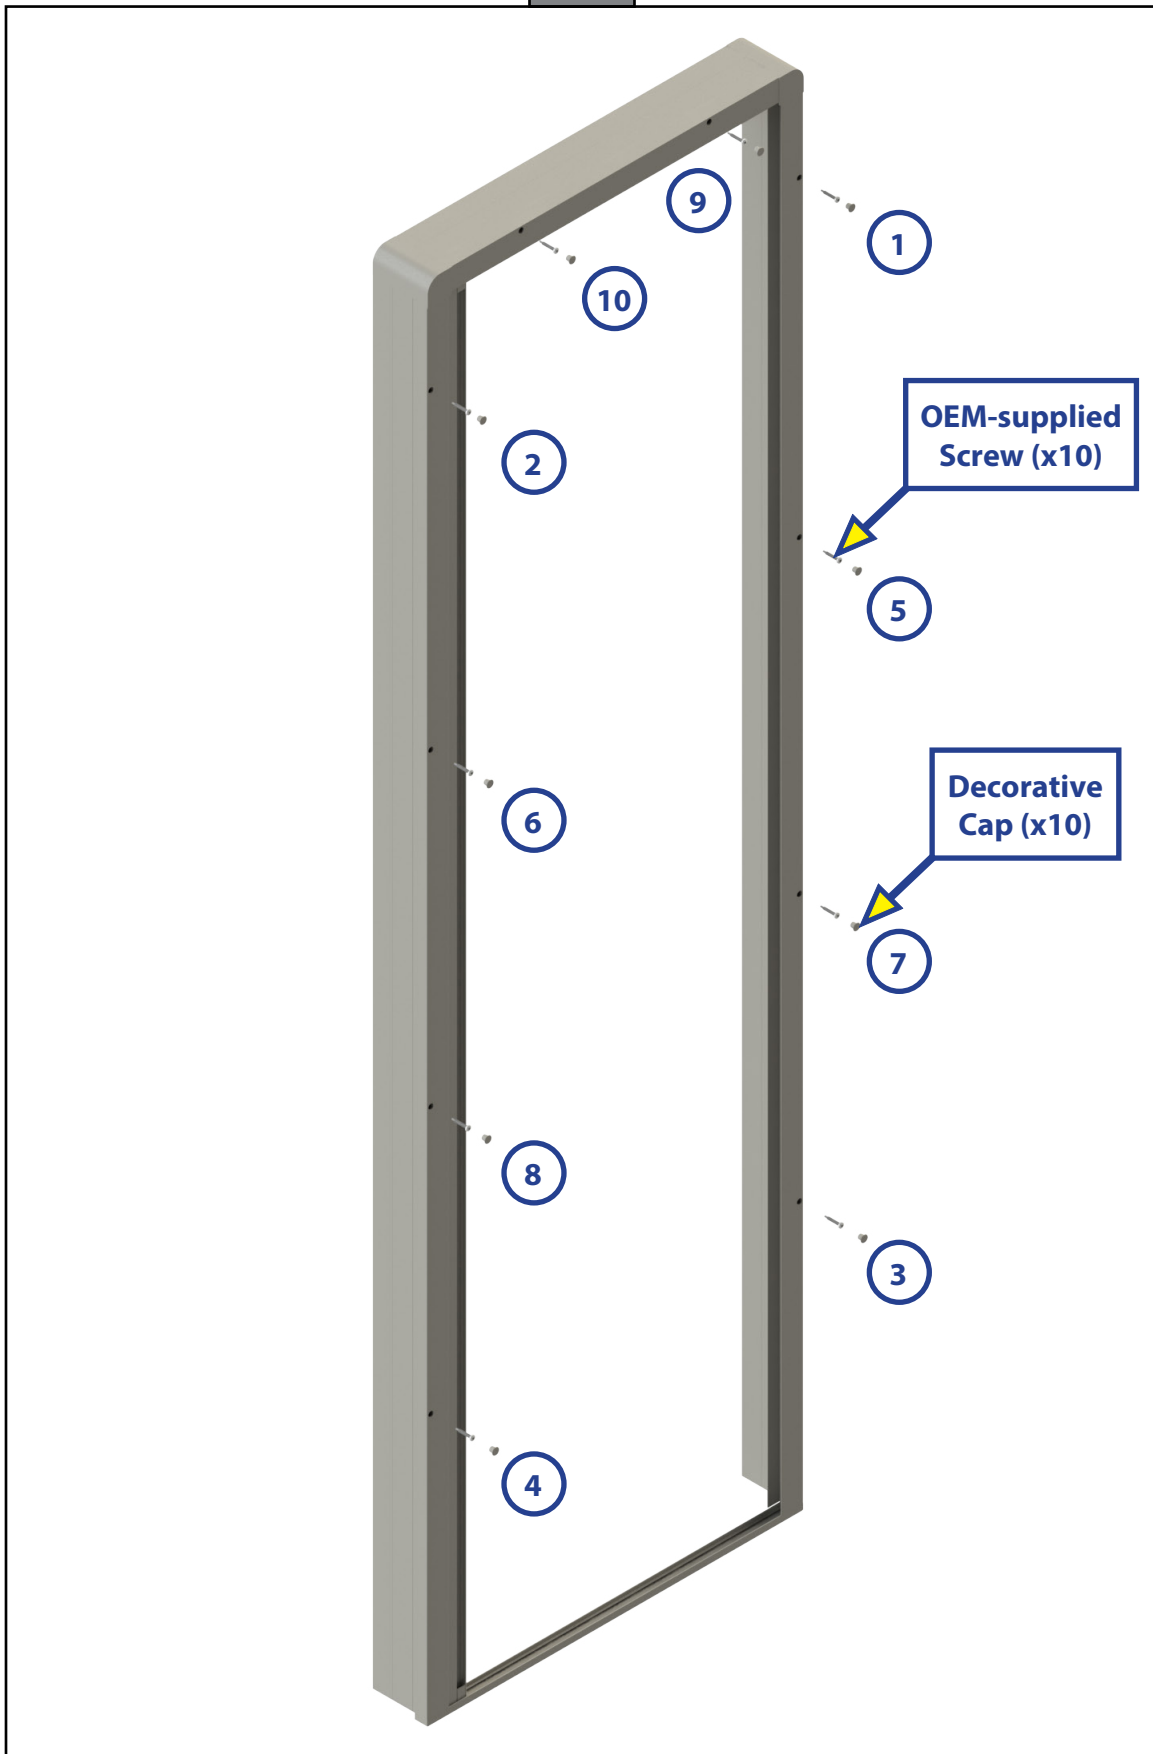


- B. The size and length of the screws needed to install the flyscreen door varies depending on the dimension of the OEM-supplied spacer used. Refer to the following table for suggested screw sizes for a given spacer being used.

Spacer - inch (mm)	Screw - inch (mm)
0 (0)	#6 x 3/4 (3.5 x 20)
5/16 (8)	#6 x 3/4 (3.5 x 20)
5/8 (16)	#6 x 1 1/4 (3.5 x 30)
15/16 (24)	#8 x 1 1/2 (4 x 40)
1 17/64 (32)	#8 x 2 (4 x 50)
1 37/64 (40)	#8 x 2 3/8 (4 x 60)
1 57/64 (48)	#8 x 2 3/4 (4 x 70)
2 13/64 (56)	#8 x 3 5/32 (4 x 80)
2 33/64 (64)	#8 x 3 35/64 (4 x 90)

4. After all screws have been installed, cover all screw locations (Fig. 2, 1-10) with the supplied decorative caps (Fig. 3A).

Fig. 3

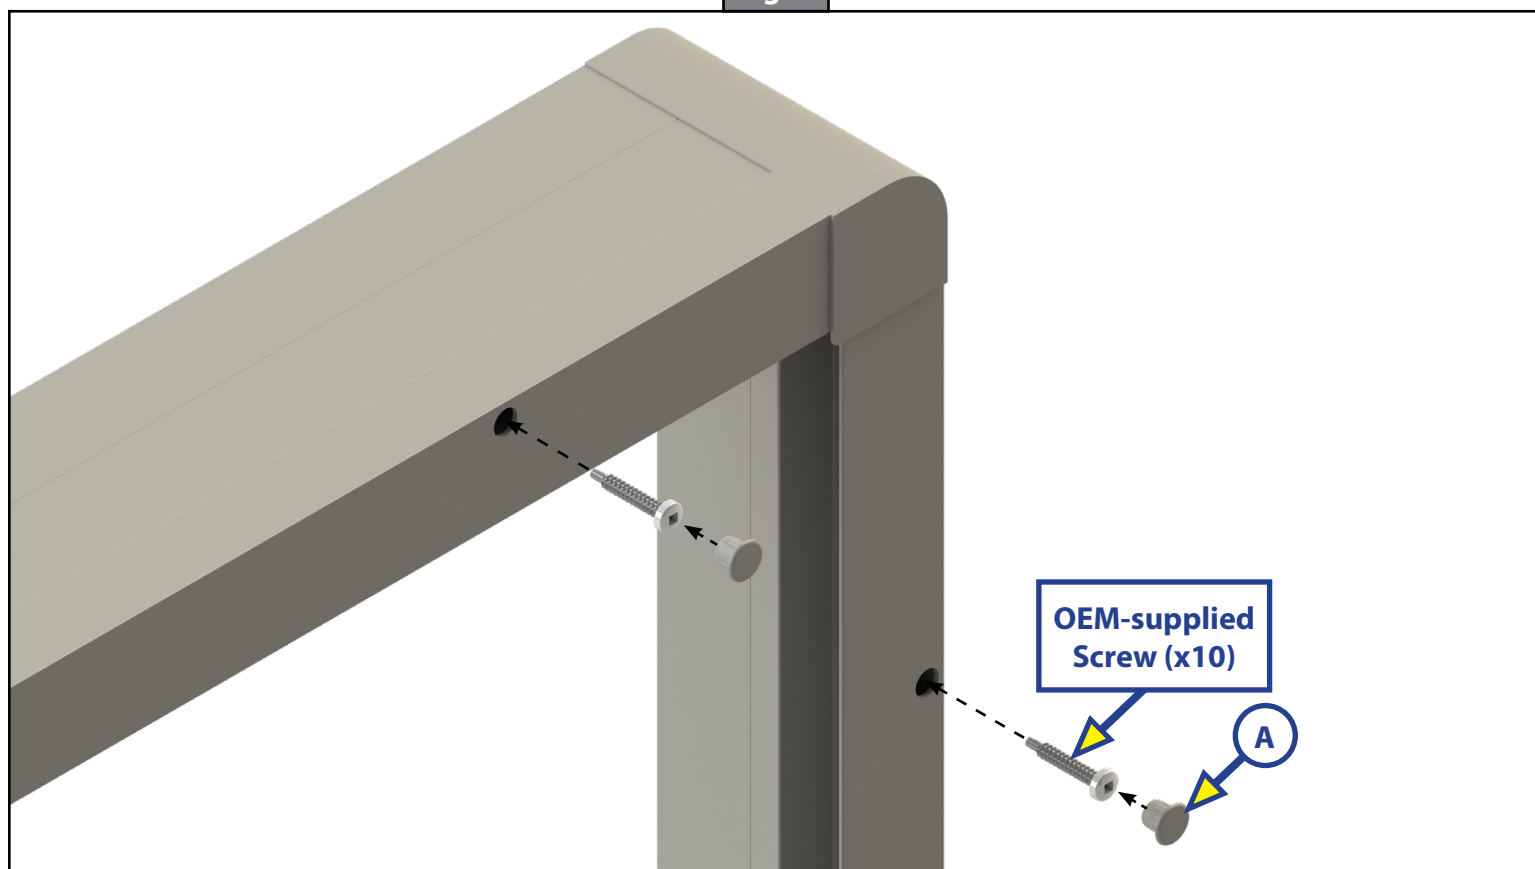

Post Installation Check

NOTE: The flyscreen door can only be operated while the coach's door is open. Before closing the coach door, open the flyscreen door.

Fully open and close the flyscreen a few times to check for any binding in the flyscreen's tracts. Slowly slide the flyscreen open to make sure the clutched sliding system stops at each position. If necessary, the flyscreen frame can be cleaned with a damp cloth and mild soap.

NOTE: Do **NOT** wash the screen fabric or damage to the screen can occur.



The contents of this manual are proprietary and copyright protected by Lippert Components, Inc. (LCI). LCI prohibits the copying or dissemination of portions of this manual unless prior written consent from an authorized LCI representative has been provided. Any unauthorized use shall void any applicable warranty. The information contained in this manual is subject to change without notice and at the sole discretion of LCI.

Revised editions are available for free download from lippert.com.

Please recycle all obsolete materials.

For all concerns or questions, please contact
Lippert Components, Inc.

Ph: 432-LIPPERT (432-547-7378) | Web: lippert.com | Email: customerservice@lci1.com



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.