

DOORS

Purpose

This document outlines how to reinforce an entry door attachment at the hinges by removing the existing screws from the bottom and middle hinge leafs and installing new #10 x 1-1/2" screws in the leafs.

Resources Required

- Cordless or electric drill or screwdriver
- Appropriate drive bits
- #10 x 1-1/2" screws

Safety

Read and understand all instructions before installing or operating this product. Adhere to all safety labels. This manual provides general instructions. Many variables can change the circumstances of the instructions, i.e., the degree of difficulty, operation and ability of the individual performing the instructions. This manual cannot begin to plot out instructions for every possibility, but provides the general instructions, as necessary, for effectively interfacing with the device, product or system. Failure to correctly follow the provided instructions may result in death, serious personal injury, severe product and/or property damage, including voiding of the Lippert limited warranty.

CAUTION

The "CAUTION" symbol above is a sign that a safety risk is involved and may cause personal injury and/or product or property damage if not safely adhered to and within the parameters set forth in this document

CAUTION

Moving parts can pinch, crush, or cut. Keep clear at all times.

Procedure

NOTE: Any separation of the door requires the following procedure be completed on both bottom and middle hinges.

1. With the door open, start with the bottom hinge (Fig.1A) and remove all six screws (Fig.1B) that attach the leafs (Fig. 1C) to the core of the door (Fig. 1D).
2. Install 6 #10 x 1-1/2" screws where the screws were removed from the hinge.

NOTE: When installing the new screws, stop short about 1/8" to 1/4".


3. Proceed to the middle hinge (Fig. 1E) and remove all six screws (Fig.1B) that attach the leafs (Fig. 1C) to the core of the door Fig. 1D).
4. Install 6 #10 x 1-1/2" screws where the screws were removed from the hinge.

NOTE: When installing the new screws, stop short about 1/8" to 1/4".

5. After all of the #10 x1-1/2" are installed, start at the middle hinge and work down, carefully tighten the screws in increments to secure the hinges evenly.

DOORS

Fig. 1

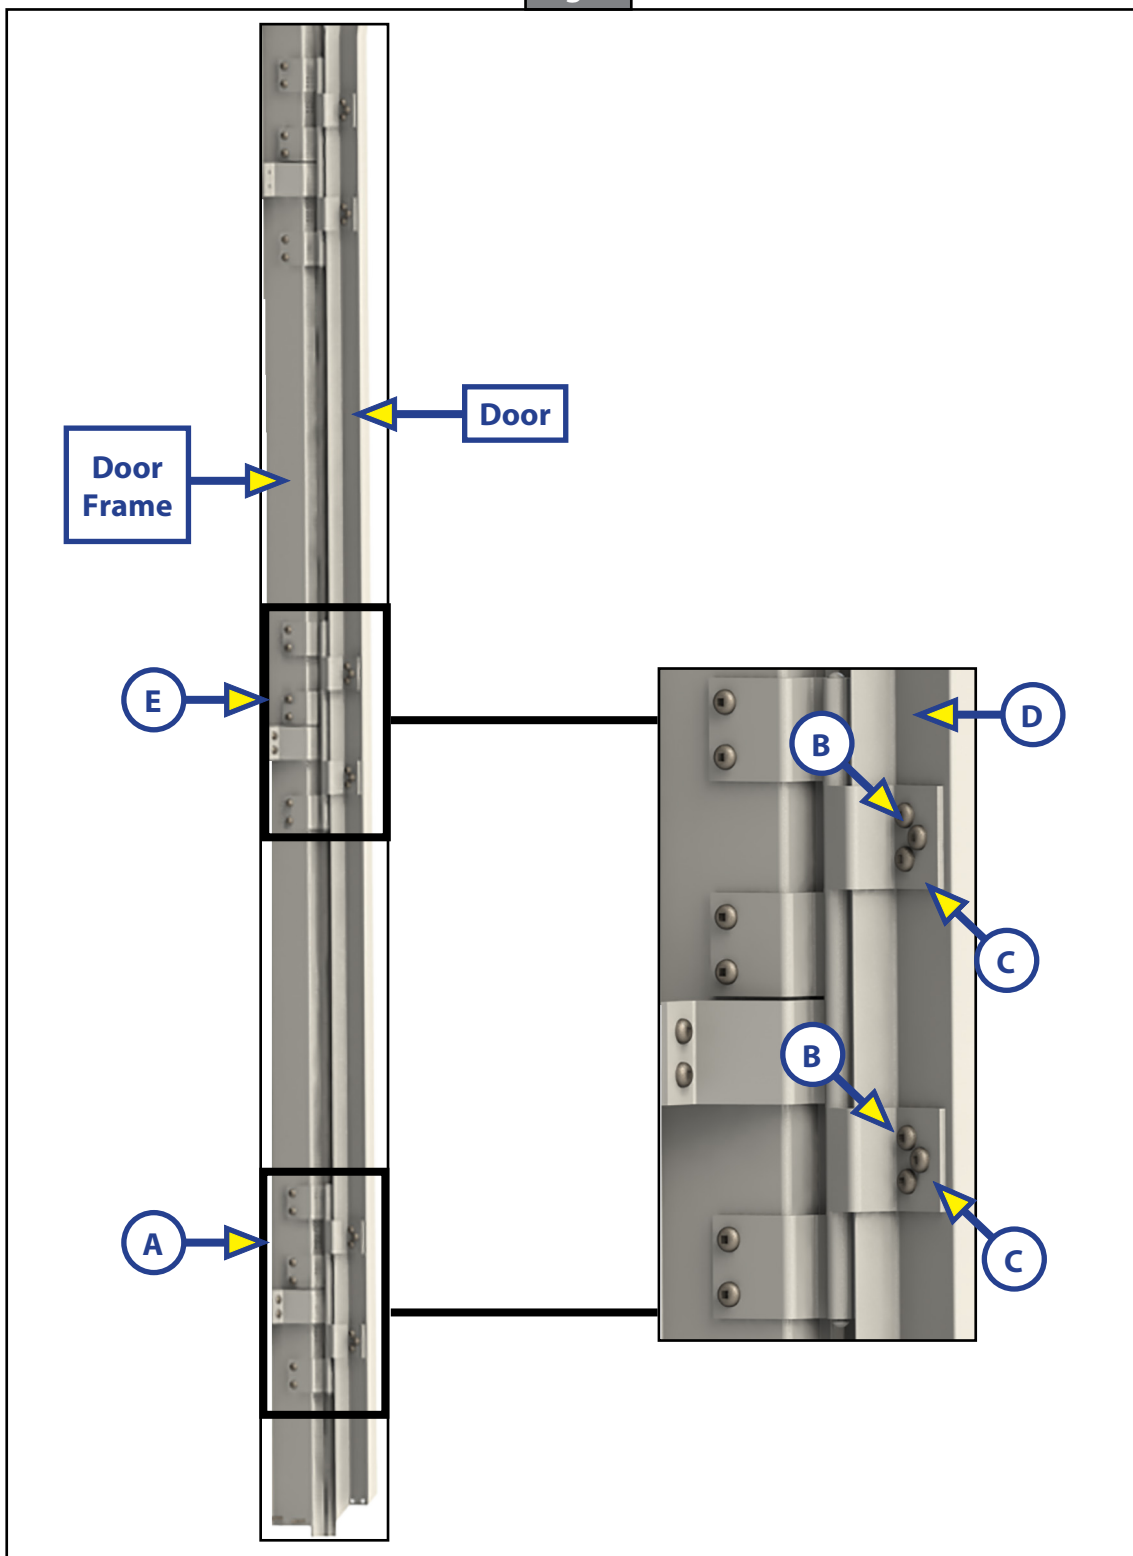

As a supplier of components to the RV industry, safety, education and customer satisfaction are our primary concerns. Should you have any questions, please do not hesitate to contact us at 432-LIPPERT (432-547-7378) or by email at customerservice@lci1.com. Self-help tips, technical documents, product videos and a training class schedule are available at lippert.com or by downloading the LippertNOW app.



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.