


SLIDE-OUTS

OEM

Model Name-Floorplan#

Plant#

F.A.S.T. Track Slide-out

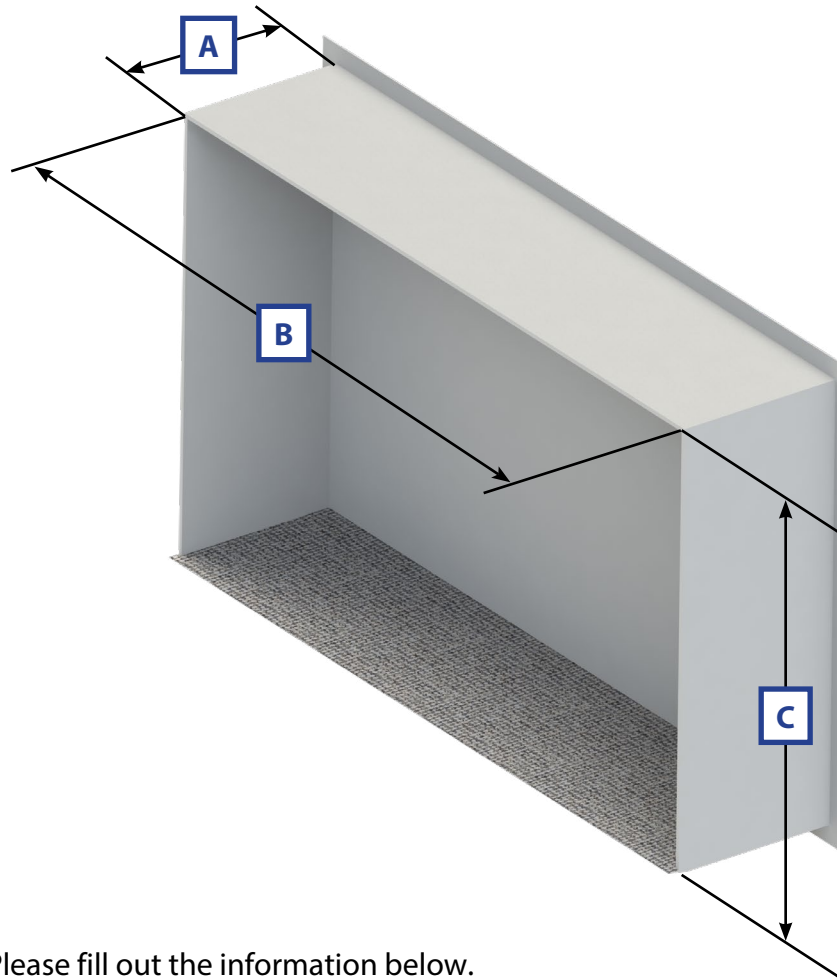

Please fill out the information below.


A = Depth of slide box
Depth range 12" to 40" at 0.125" increments

NOTE: From T-molding to fascia, room depth at the top of the room must be equal to the room depth at the bottom of the room.

B = Length of slide box
(Finished dimension, with skin)

C = Height of slide box
(Take this measurement at two points: the tallest point of the box and the shortest point of the box.)

SLIDE-OUTS

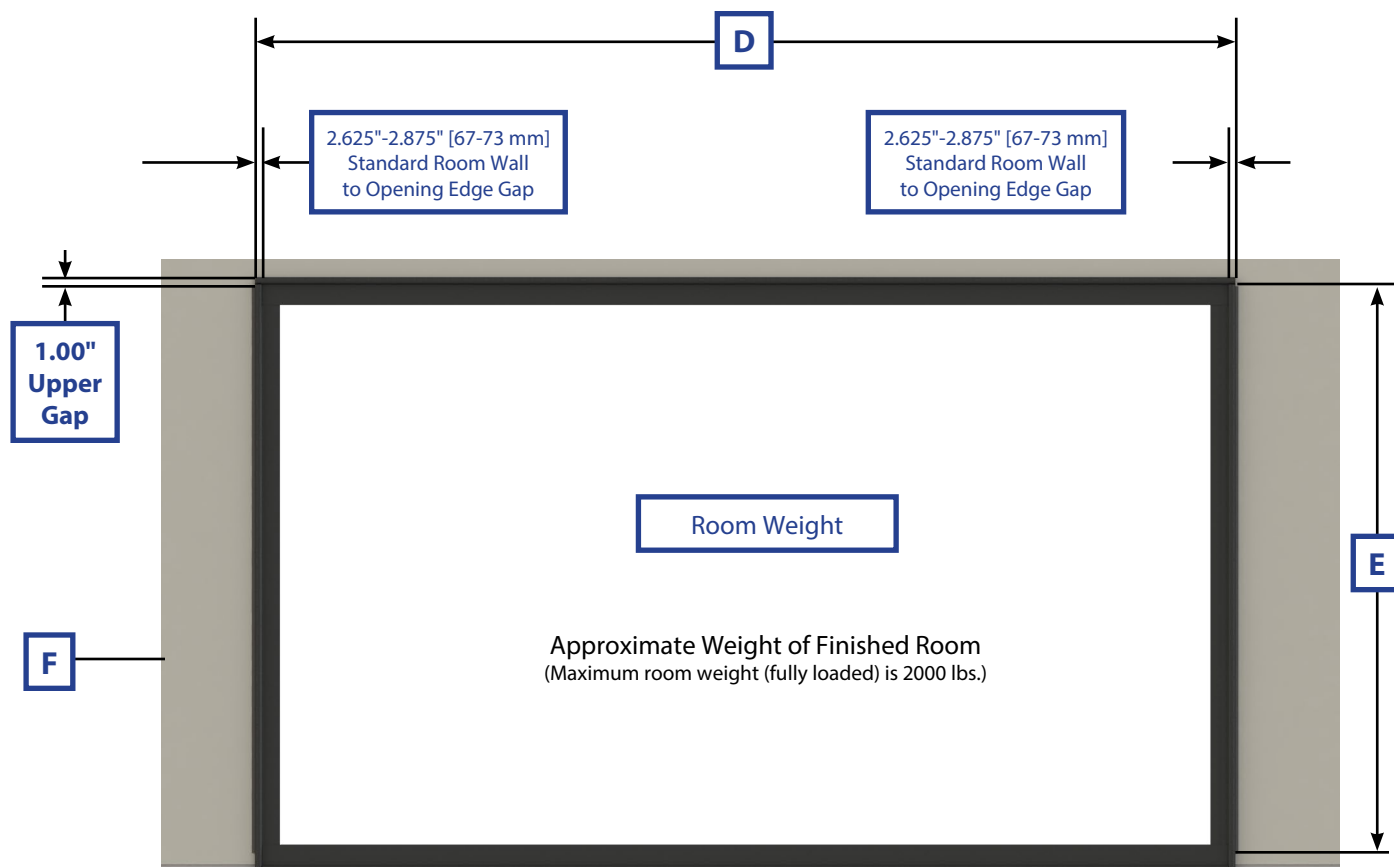

Please fill out the information below.

D = Length of slide opening in sidewall
Slide-out Room Width + 5.5" (+/- 0.25").

E = Height of slide opening in sidewall
Room height plus roller height plus 1.00" (+0.00"/- 0.25").

F = Main wall thickness
Thickness range 1.375" to 2" at 0.125" increments.

Specified Notes

(Slide opening must be a minimum of 5.25" larger than length of room.)

Interior of Slide Room Consists of :

Approved By (customer)

Date

Slide Tech

As a supplier of components to the RV industry, safety, education and customer satisfaction are our primary concerns. Should you have any questions, please do not hesitate to contact us at (574) 537-8900 or by email at customerservice@lci1.com. Self-help tips, technical documents, product videos and a training class schedule are available at lci1.com or by downloading the MyLCI app.



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.