




FM-BB9 BUMPER BRACE

Installation Instructions

1. Locate the fender brace which runs from the bed cross member to the bottom of the fender. Remove the bolt at the bed (upper) end of this brace.
2. Place the FM-BB9 bumper brace between the bed cross member and the fender brace. Reinstall but do not tighten the bolt.
3. Align the other end of the bumper brace over the existing hole in the tab on the bottom edge of the bumper. Secure it with the hardware provided.
(It may be necessary to "tweak" the bumper back slightly to make this alignment.)
4. Tighten the bolt under the bed holding the fender brace and bumper brace.

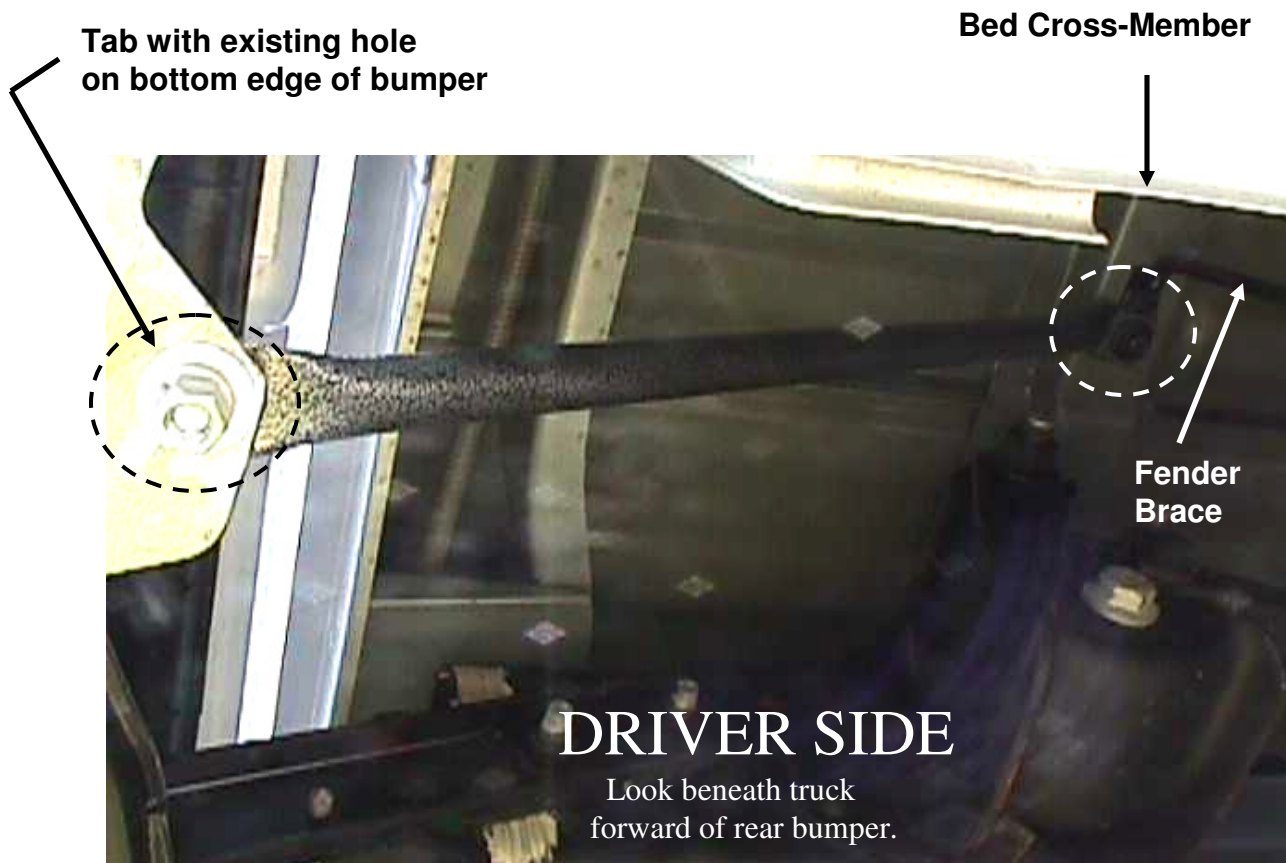



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.