



SLIDE-OUTS

Purpose

This document identifies the specifications for In-wall Slide-outs.

System Rating

LCI In-Wall Slide-out Approved System Rating.

(For slide rooms up to 86" tall and up to 120" wide, with a dual rack system setup)

Approved for applications of a room stroke up to 30 inches with a room weight of up to 1,000 lbs.

NOTE: All rooms up to 76" tall will be built with an aluminum torque shaft. Rooms over 76" tall and up to 86" tall, with a rack length less than 20" and a room weight less than 500 lbs may use an aluminum torque shaft as well. All other rooms over 76" tall and up to 86" tall will require a steel torque shaft.

NOTE: If the slide-out specifications fall outside of the specified Approved System Ratings above, please contact LCI Engineering. Anything outside of the specified Approved System Ratings above is approved on a floor plan by floor plan basis.

Roller Specification

- Rooms over 650 lbs or over 72" in width require rollers.
- For rooms under 650 lbs and under 72" in width:
 - floor rollers are preferred for optimal performance, but not required.
 - wear bar (Boyd 3157-XXX) may be used, with plastic coated or painted (no grit) floors.
 - construction without rollers or wear bar is acceptable within these parameters to meet minimum requirements.



LIPPERT
COMPONENTS

IN-WALL® SLIDE-OUT SPECIFICATIONS

S-023


SLIDE-OUTS

In-Wall® Slide-out

OEM

Plant

View and Dimensions Taken from Inside of Unit

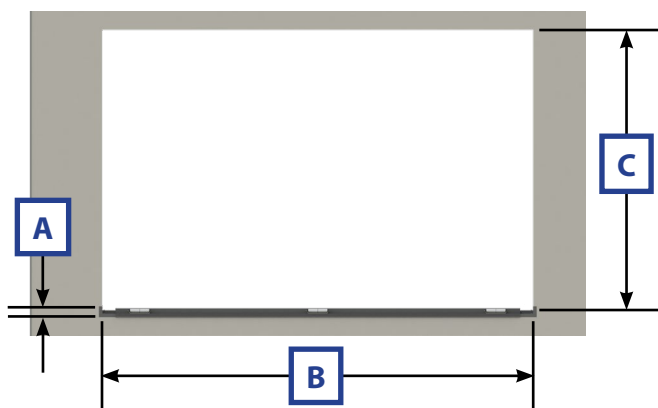

Please fill out the information below.

A = Roller height _____

B = Length of slide opening in sidewall _____
needs to be 5.25" larger than measurement (F).

C = Height of slide opening in sidewall _____
slide opening is equal to height of slide box (D)
plus 1.25".

D = Height of slide box _____

E = Depth of slide box _____
(Maximum depth of rack is 38")

F = Length of slide box _____

Number of Racks

Standard Stacked Rack VII

Rack Color

Clear Black

Column Type (C-channel column)

Standard Screwcover


Column Color

White Black

Motor Option

300:1 500:1

Approved By (Customer)

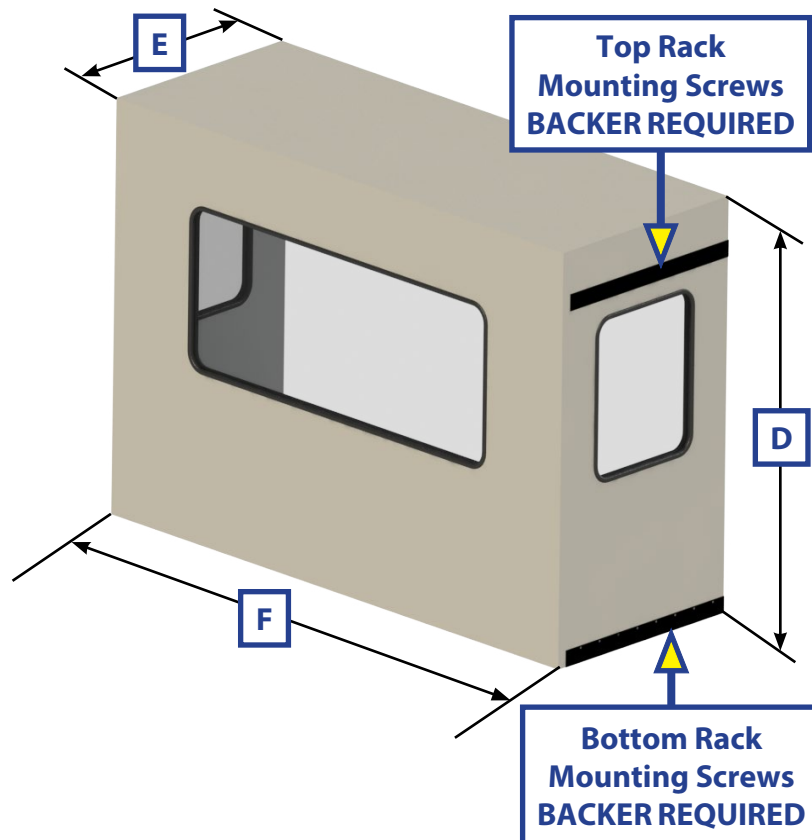

Interior/Exterior Wiper and/or Bulb

0.5" Bulb,
Standard Wiper



[KE]

1 pc J-Seal
"Wide" Wiper



[J]

1" Bulb,
"Wide" Wiper



[EK]

No Bulb,
"Wide" Wiper



[Flat]

Wiper Types

Outside seal [KE] [EK] [J] [Flat]

Inside seal [KE] [EK] [J] [Flat]

Interior of Slide Room Consists of

As a supplier of components to the RV industry, safety, education and customer satisfaction are our primary concerns. Should you have any questions, please do not hesitate to contact us at (574) 537-8900 or by email at customerservice@lci1.com. Self-help tips, technical documents, product videos and a training class schedule are available at lci1.com or by downloading the MyLCI app.



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.