


DOORS

LCI Rear Ramp Doors come with four, five or six springs. If the ramp door has four or five springs, one or two springs can be added for additional leverage assistance when operating the door. Vacant spring positions will be found on either end of the door and never in the middle four positions.

Fig. 1

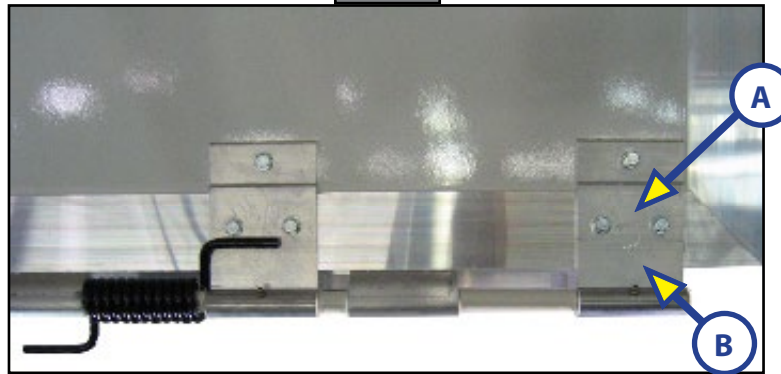

Instructions for adding a Rear Ramp Door Spring:


NOTE: Be sure the Rear Ramp Door is completely closed and securely locked.

⚠ CAUTION

NEVER use a power drill, pneumatic drill or impact wrench on these bolts. Use **ONLY** a manual ratchet or wrench to remove the bolts from the bracket. Using a powered wrench will cause the "T" nuts to come loose, making remounting the bracket much more difficult. If a powered drill or wrench is to be used, a second person **MUST** be inside the coach holding the "T" nuts in place.

1. Remove the three bolts (Fig. 1A), holding the last bracket to the door (Fig. 1B).
2. Slide bracket off the spring rod (Fig. 2A).
3. Slide new spring over the spring rod.
4. Carefully reinsert the bracket and the bolts.
5. Slowly tighten bolts until they firmly thread into the "T" nuts.
6. Tighten with manual ratchet or wrench until snug.

Fig. 2

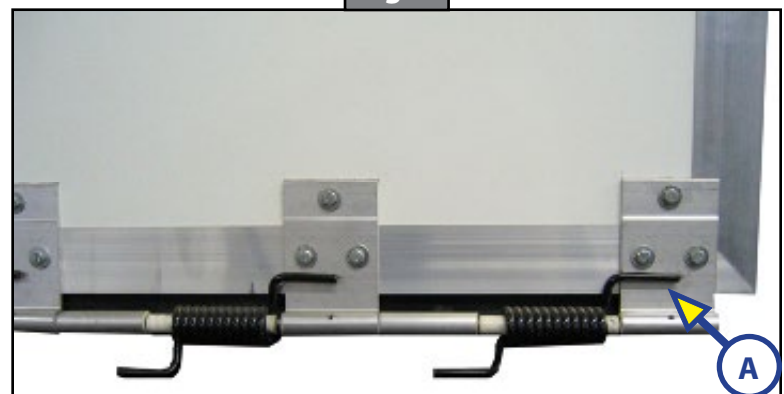



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.