



LCI RETRACTABLE PET LEASH OEM INSTALLATION MANUAL

LIPPERT
COMPONENTS®

TABLE OF CONTENTS

Introduction	2
Safety	2
Resources Required	2
Installation	2

Introduction

The Retractable Pet Leash provides a secure option which allows your pet to roam around the camp site. Additional information about this product can be obtained from lci1.com/support or by downloading the free myLCI app. The app is available on iTunes® for iPhone® and iPad® and also on Google Play™ for Android™ users.

iTunes®, iPhone®, and iPad® are registered trademarks of Apple Inc.
Google Play™ and Android™ are trademarks of Google Inc.

Safety

⚠ CAUTION

Always wear eye protection when performing service, maintenance or installation procedures. Other safety equipment to consider would be hearing protection, gloves and possibly a full face shield, depending on the nature of the task.

⚠ CAUTION



Moving parts can pinch, crush or cut. Keep clear and use caution.

Resources Required


- Cordless or electric drill or screw gun
- 1/4" or 9/32" drill bit
- Ratchet wrench with 7/16" and 9/16" sockets
- 7/16" and 9/16" wrenches
- Marking device

Installation


1. Place pet leash housing in desired mounting location on the rear bumper (Fig. 1).
2. Inserting a marking device through the holes (Fig. 1A), mark location of the mounting holes on the surface of the bumper (Fig. 2).
3. Using a 1/4" or 9/32" drill bit, drill two holes through the bumper at marks made in step 2.
4. Position the pet leash housing on the bumper, aligning the holes of the housing with the holes drilled in step 3.

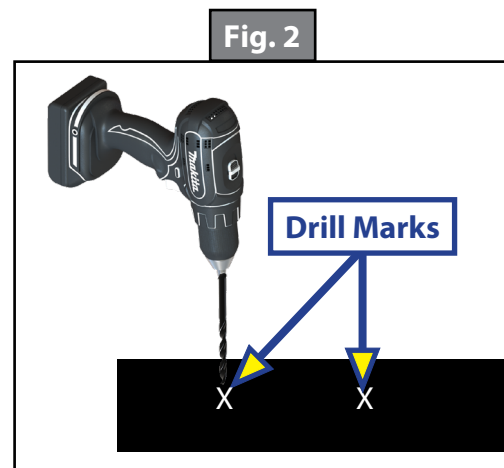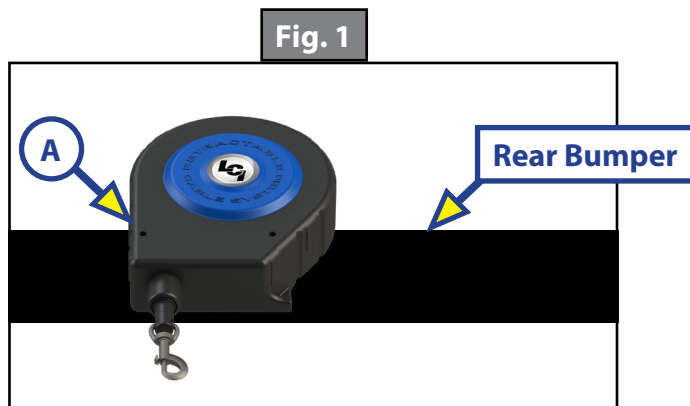

5. Insert the included $\frac{1}{4}$ " - 20 x 3" bolts through holes in the pet leash housing and bumper (Fig. 3).
6. Using a $\frac{3}{8}$ " socket or wrench secure by threading the $\frac{1}{4}$ " breakaway nuts, flange end facing up to the bumper, onto the bolts (Fig. 3A).

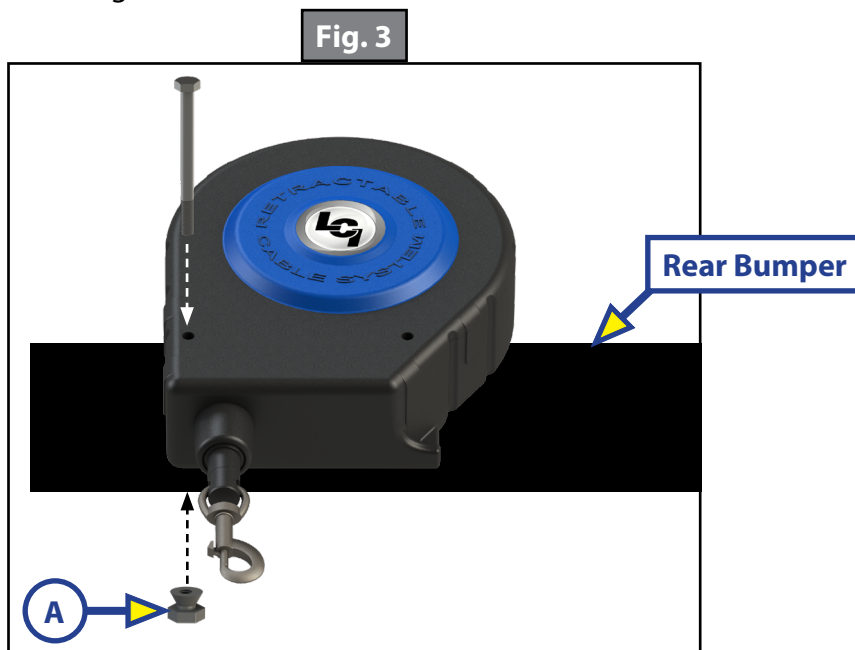

7. Using a $\frac{7}{16}$ " socket or wrench for the bolt and a $\frac{9}{16}$ " socket or wrench for the nut, tighten and break the heads off of the two $\frac{1}{4}$ " - 20 breakaway nuts (Fig. 4).

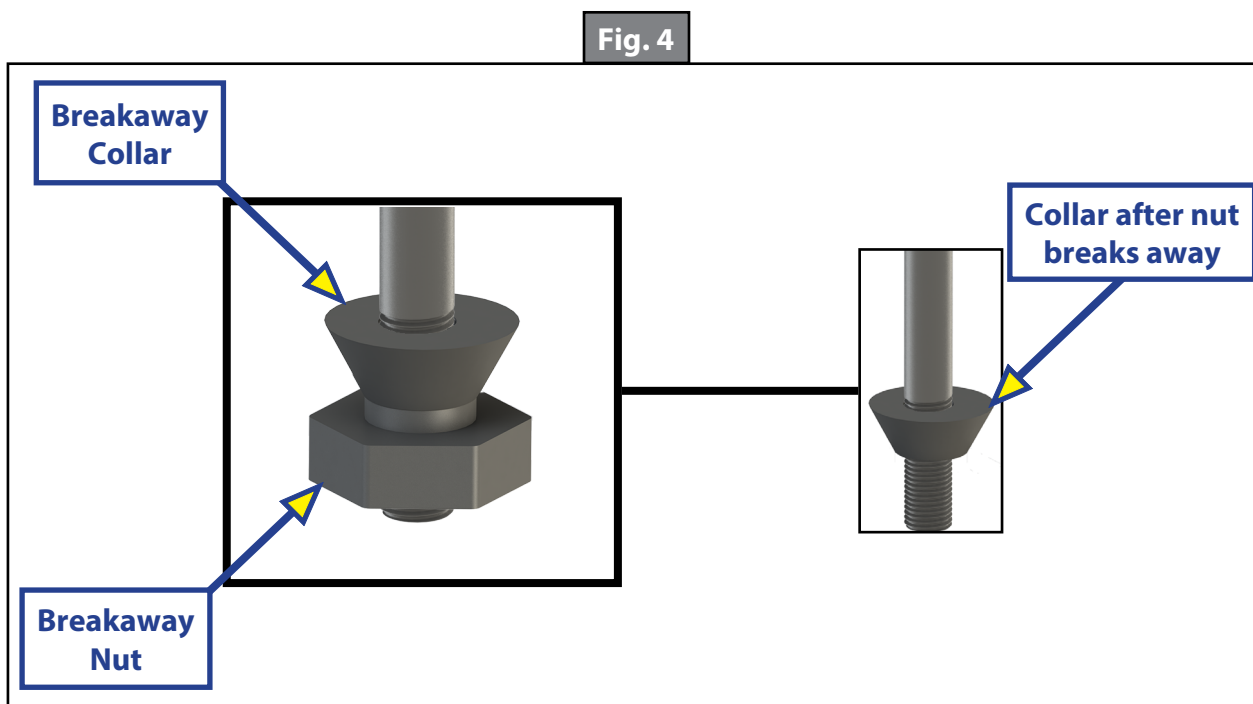



L I P P E R T C O M P O N E N T S[®]

The contents of this manual are proprietary and copyright protected by Lippert Components, Inc. ("LCI"). LCI prohibits the copying or dissemination of portions of this manual unless prior written consent from an authorized LCI representative has been provided. Any unauthorized use shall void any applicable warranty. The information contained in this manual is subject to change without notice and at the sole discretion of LCI.

Revised editions are available for free download from lci1.com.

Please recycle all obsolete materials.

For all concerns or questions, please contact
Lippert Components, Inc.

Ph: (574) 537-8900 | Web: lci1.com | Email: customerservice@lci1.com



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.