



LIPPERT
COMPONENTS®



Thin Shade

For LCI RV Entry Door

Installation and

Owner's Manual

(For Aftermarket Applications)

Thin Shade	
Part #	Description
786037	Window Shade

Introduction

This document provides the procedure to install the LCI Thin Shade into a LCI RV entry door with the 711862 Outer Frame/786036 Inner Frame snap-together frame, or the 387500 Outer Frame/387501 Inner Frame screw-together frame.

Additional information about this product can be obtained from support.lci1.com or by downloading the free myLCI app. The app is available on iTunes® for iPhone® and iPad® and also on Google Play™ for Android™ users.

iTunes®, iPhone®, and iPad® are registered trademarks of Apple Inc.

Google Play™ and Android™ are trademarks of Google Inc.

Table of Contents

Introduction	1
Safety Information	2
Resources Required	2
Parts List	2
Installation-Snap Frame	2
Installation - Screw-in Frame	3

Thin Shade

Installation and Owner's Manual

(For Aftermarket Applications)

Safety Information

⚠ CAUTION


MOVING PARTS CAN PINCH, CRUSH OR CUT. KEEP CLEAR AND USE CAUTION.

Resources Required

- Cordless or electric drill or screw gun
- Phillips screwdriver
- Appropriate drive bits
- Tape measure

Parts List

Letter	Part #	Description	Qty
A	786037	Thin Shade 11 7/8" x 21 1/2"	1

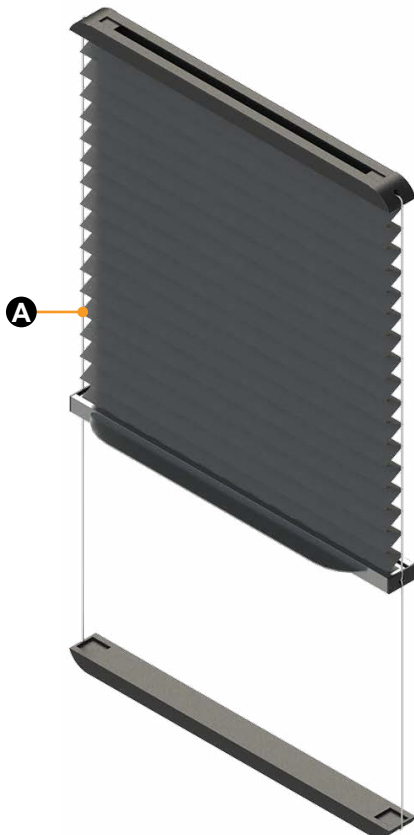

Installation-Snap Frame

1. Unlatch the small levers at the top of the window frame in a left-to-right direction (Fig.1).

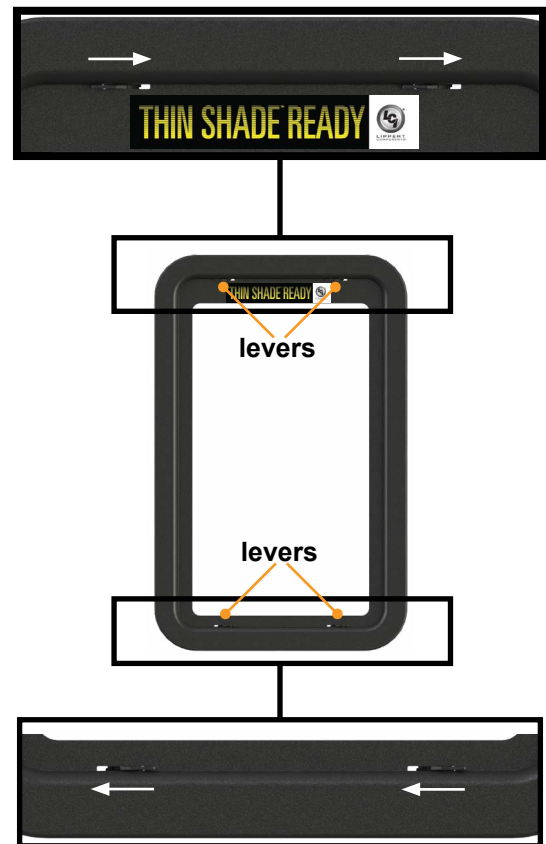


Fig.1

2. Unlatch the levers at the bottom of the frame in a right-to-left direction (Fig.1).
3. If equipped, remove the existing shade from the frame and discard.
4. Holding the top shade sill at an approximate 45 degree angle, insert one end into the corner between the inner frame and glass (Fig.2A).
5. Repeat this action on the opposite end of the top sill.
6. Press both ends up and latch in place moving levers in a right-to-left direction.



LIPPERT
COMPONENTS®

Thin Shade

Installation and Owner's Manual

(For Aftermarket Applications)

7. Holding the bottom shade sill at an approximate 45 degree angle, insert one end into the corner between the inner and outer frame (Fig.2B).
8. Repeat this action on the opposite end of the bottom sill.
9. Press both ends down and latch in place, moving levers in a left-to-right direction.



Fig.2

Installation - Screw-in Frame

NOTE: Door must be equipped with #387501 inner frame.

1. Working from the bottom of the shade, locate the bottom sill fixture (Fig.3A).
2. Remove end caps from center of fixture.
3. Locate the knots tied at the end of each cord (Fig.3B).

4. Measure $\frac{1}{2}$ " up from the existing knot and mark the cord.
5. Repeat this action on the opposite cord.
6. Create a new knot on both cords, at the marks made in step 4.
7. Pull bottom sill of shade down to the newly created knots.
8. Replace end caps.

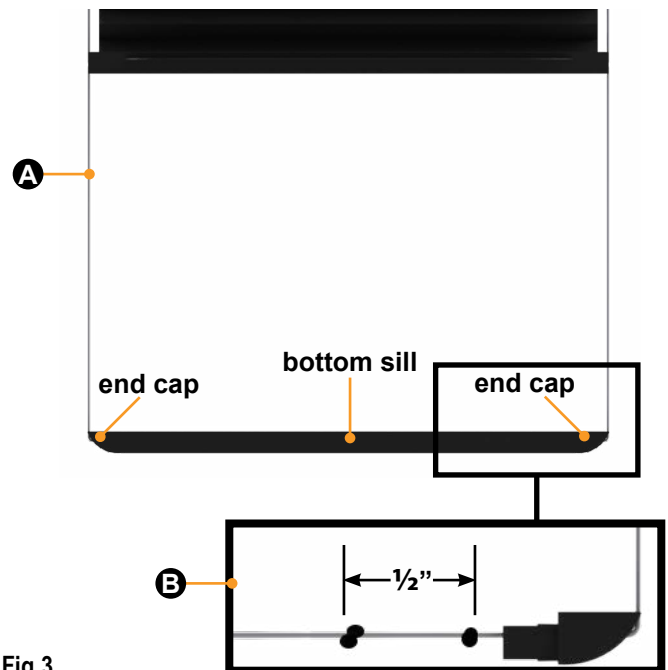


Fig.3

CAUTION

FAILURE TO FOLLOW THE RECOMMENDED PROCEDURE OF REMOVAL COULD RESULT IN PERSONAL INJURY FROM BROKEN GLASS OR DAMAGE TO EQUIPMENT. IT IS IMPORTANT TO REMOVE THE PHILLIPS HEAD SCREWS IN THE ORDER STATED.



LIPPERT
COMPONENTS®

Thin Shade

Installation and Owner's Manual

(For Aftermarket Applications)

9. Remove the top 8 Phillips head screws (Fig.4A) from the interior window frame. Do not discard screws.
10. Gently pull back the top of the frame.
11. If currently equipped, remove the existing window shade from inside of the interior window frame.
12. Holding the top shade sill at an approximate 45 degree angle, insert one end into the corner between the inner frame and glass (Fig.4).

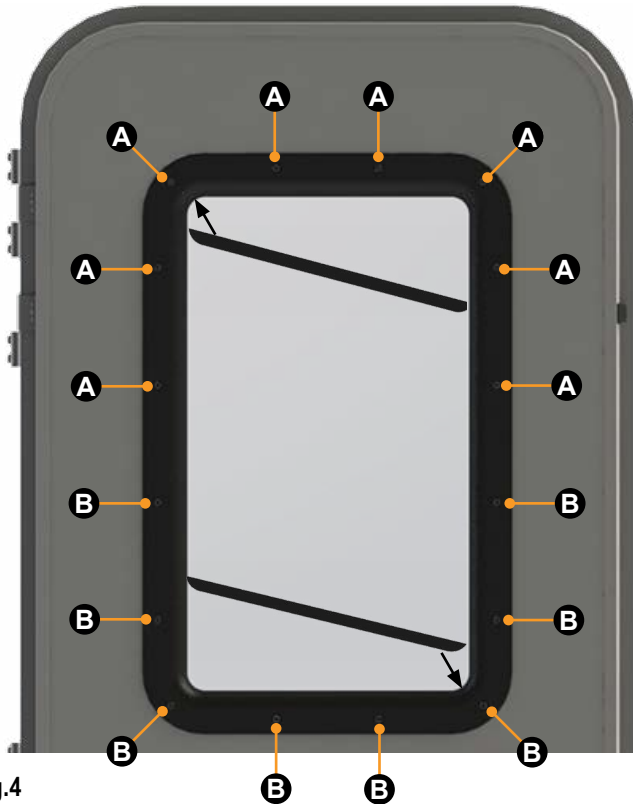


Fig.4

13. Repeat this action on the opposite end of the top sill.
14. Press both ends up until the part is securely in place.
15. Top sill must be seated above tabs (Fig.5A)
16. Press top of frame back into position and replace Phillips head screws removed in step 9.
17. Remove the bottom 8 Phillips head screws (Fig.4B) from the interior window frame. Do not discard screws.

18. Holding the bottom shade sill at an approximate 45 degree angle, insert one end into the corner between the inner frame and glass (Fig.4).

19. Repeat this action on the opposite end of the bottom sill.

20. Press both ends down until the part is securely in place.

21. Bottom sill must be seated below tabs (Fig.5B)

22. Press bottom of frame back into position and replace Phillips head screws removed in step 16.

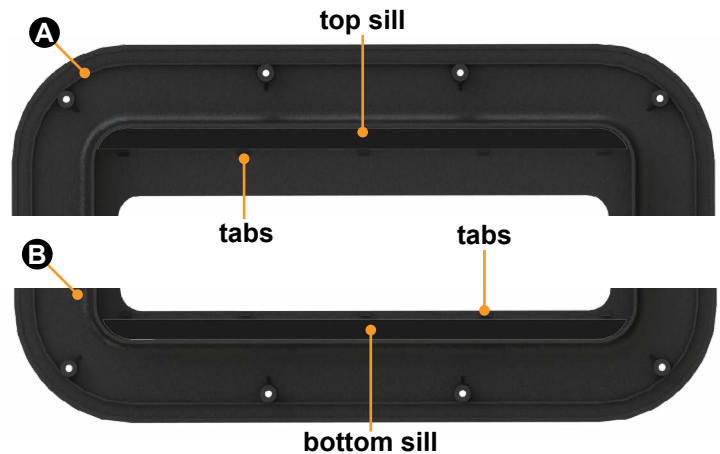


Fig.5



LIPPERT
COMPONENTS®

Manual information may be distributed as a complete document only, unless Lippert Components provides explicit consent to distribute individual parts.

All manual information is subject to change without notice. Revised editions will be available for free download at lci1.com. Manual information is considered factual until made obsolete by a revised version.

Please recycle all obsolete materials and contact Lippert Components with concerns or questions.



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.