


AXLES

Customer Name										
Beam Only				Axle Beam Round Diameter: 2K = 1-3/4" 3.5K = 2-3/8" 3.5K=3" Special Order 5.2 - 7K = 3" 8K = 3" 10K = 4" 12K/16K = 5"						
Spring Axle										
Customer Part Number										
Model #	2K	3.5K	4.4K	5.2K	6K	7K	8K	10K	12K	16K
Axle Capacity										
Spindle Style		Straight			4" Drop			4" Drop up to 8K		
Lubrication Type (if grs)		Standard			Super Lube/Zerk					
Fluid Type		Oil			Grease					
Axle Type		Brake			Idler					
Brake Type		Electric	Disc	Hydraulic	Electric, Self Adjust			Air (12-16K)		
Brake Flange, Opt on 2K & 3.5K		Yes			No					
Tube Type		Standard			Heavy Wall					
Camber		Yes			No					
Bolt Pattern		Brake	475	545	550	555	655	865	8/275mm	
		Idler	440	475	545	550	555	655	865	
Stud Size		1/2"	5/8"	9/16"	M22					
Hub Face Dimension		See Below								
Spring Center Dimension		See Below								
Spring Orientation		Overslung			Underslung					
Spring Type		Double Eye			Slipper			No Springs		
Spring Length, Eye to Eye No Load		20"	23"	25"						



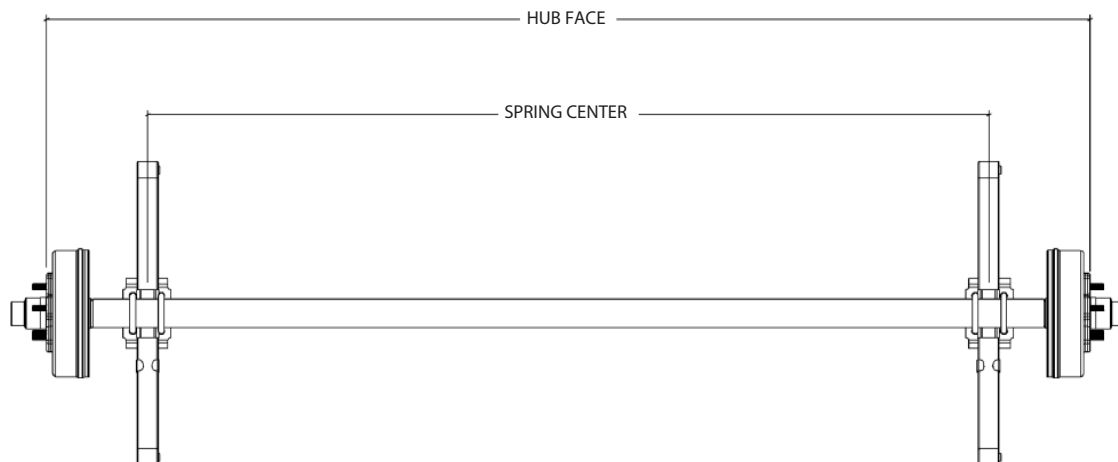

This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.