

ELECTRONICS

Operation

1. To turn on the remote: Press and release the blue button on the unit (Fig. 1A).
2. To turn off the remote: Press and hold the blue button (Fig. 1A).

NOTE: The remote will also automatically turn off if left idle for 2 minutes.

Syncing Remote to Receiver

1. Push and hold the blue reset button on the receiver (Fig. 2A) for approximately 5 seconds until the red LED indicator lights up (Fig. 2B). Press and hold any button on the remote for approximately 3 seconds after which the red LED on the receiver will begin to flash. When the LED goes out, the remote is ready for use.
2. Touch anywhere on the touch screen to navigate to the main menu (Fig. 3A). Before attempting to operate any of the installed slides, the hydraulic pump must be turned on. Press the "On/Off" button on the touch screen (Fig. 4A). Press any of the buttons on the screen and following the on screen instructions.

NOTE: The security light will not turn off automatically. Leaving it on for an extended amount of time will deplete battery life.

3. Service Info button navigates to a page with the LCI Customer Service contact information (Fig. 5A).

Fig. 1

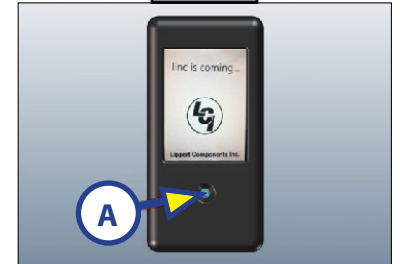


Fig. 2

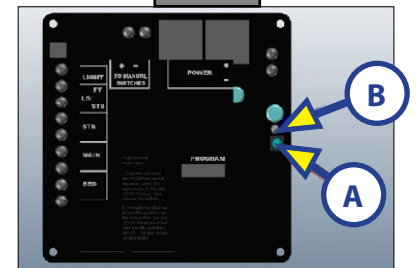


Fig. 3


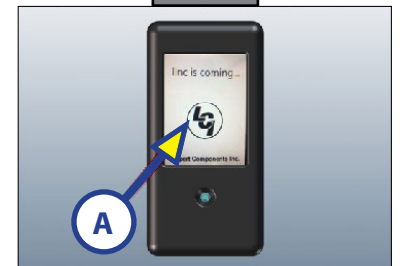


Fig. 4



Fig. 5



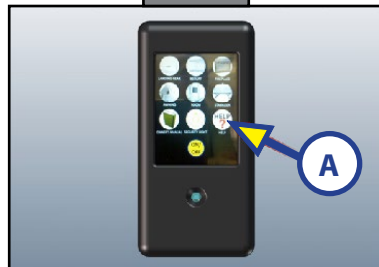

This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.