



Use this guide to determine minimum number of bolts for the applicable Pin Box.








Any 5th Wheel under 18K GVWR **MUST** use a minimum of four bolts per side.

All 5th Wheels 18K GVWR and up **MUST** use a minimum of five bolts per side.






NOTE: The exception is the 1116 and 1716, which both use six bolts per side.

⚠ CAUTION




Ratings for 5th Wheels do not change unless the retail customer attaches a Pin Box that is rated lower than the GVWR listed on the towable's federal placard. This is strongly discouraged and not recommended by LCI.

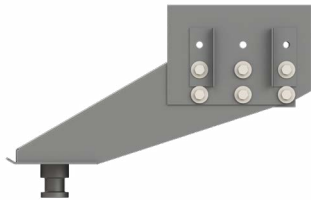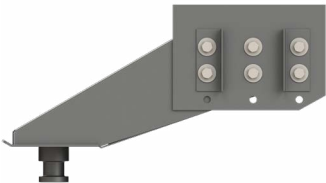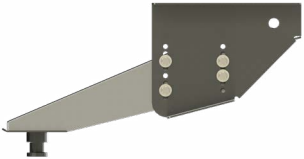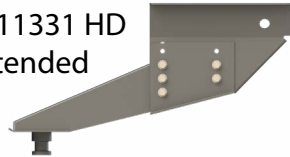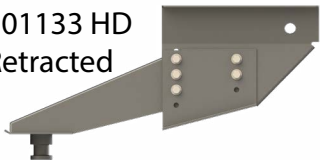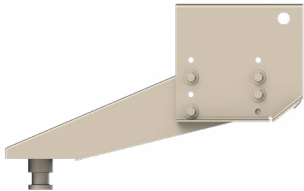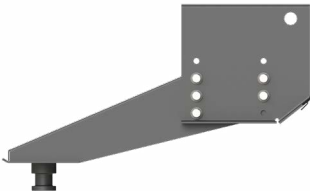1116	19K 119118 Extended  19K 1270271 Retracted 
1621	15.5K 1191191 Extended (mounted in 3rd hole down) 127026 Retracted (mounted in 2nd hole down) 152551 Fully Retracted (mounted top holes) 257619 Fully Extended (mounted in 4th hole down)  18K 3011331 HD Extended  18K 301133 HD Retracted 
1621	15.5K 350082 Extended  18K 1191151 1621 HD Extended 

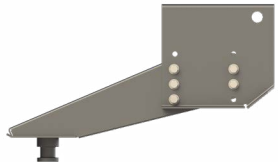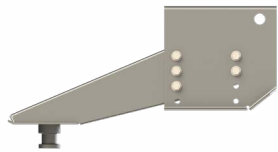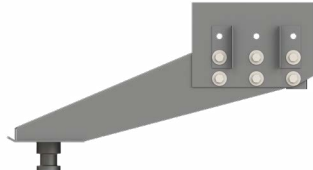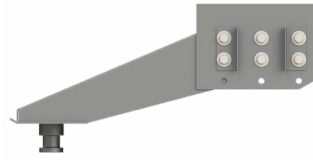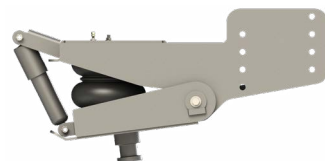

1621	21K 1387883 SHD Extended 	21K 138788 SHD Retracted 	21K 248136 SHD Extended 	21K 2481361 SHD Retracted 
1716	15.5K 1191201 Extended 		15.5K 1324791 Retracted 	
1621 1716	18K 328330 1621 Rota-Flex 	19K 176440 1716 Rota-Flex 	21K 328329 1621 Rota-Flex 	
1621 M15	16K 171200 1621 LO5 T/A  OBSOLETE Replaced by 158778	18K 155930 1621 LO5 T/A  OBSOLETE Replaced by 158778	21K 158778 1621 Long Jaw LO5 T/A  23K 256761 M15 LO5 T/A  21K 159430 1621 LO5 T/A OBSOLETE Replaced by 158778	

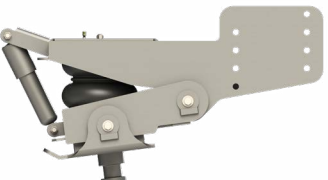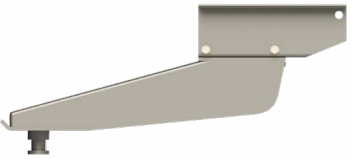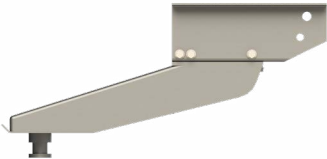

1716	21K 158777 1716 Long Jaw LO7 T/A 
1621	18K 194170 1621 LO5 T/A Tri-Glide 
1716	21K 229669 1716 LO7 T/A Tri-Glide 
	18K 328484 LO5 Medium Jaw T/A Flex-Air 
	18K 328492 LO5 Long Jaw T/A Flex-Air 
	10K 232275 Cequent Revolution  16K 260806 Cequent Revolution 




1621	15.5K 304513 Extended (Mounted in 3rd Hole Down) 304522 Extended (Mounted in Bottom Holes) 306513 Fully Retracted (Mounted in Top Holes) 18K 304514 HD Retracted 18K 304514 HD Extended 21K 304519 SHD Retracted 21K 3045191 SHD Extended
1716	18K 304516 1716 Retracted 18K 304515 1716 Extended
1116	18K 304521 1116 Extended 18K 304517 1116 Retracted




Nar-Long

16K
304520 Narrow-Long


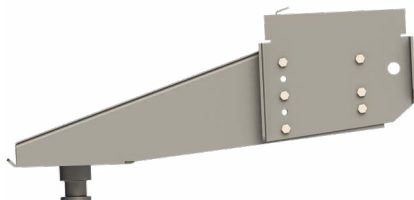


Revolution

10K
361556 Revolution




1621
15.5K
[102975/102977](#)

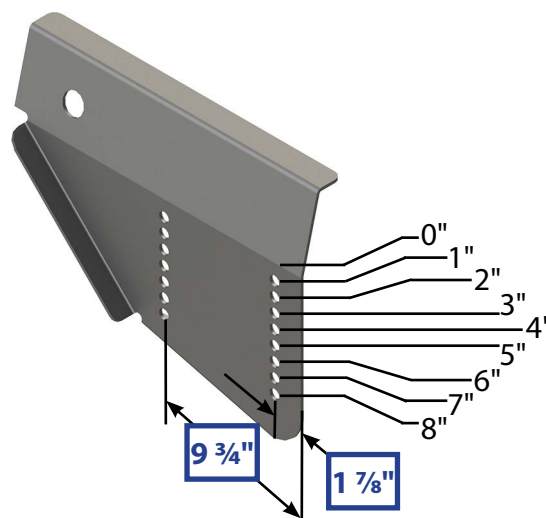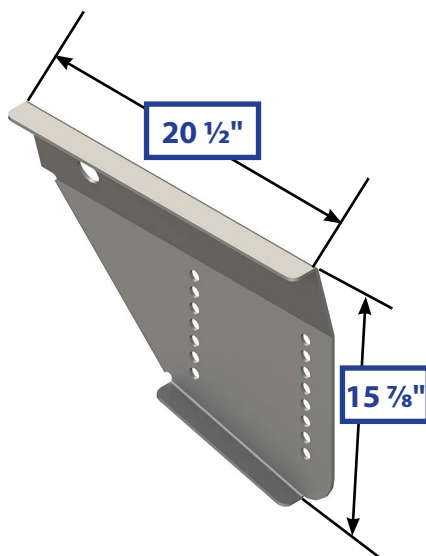





SHD 1621
M15
15.5K
126499/126503

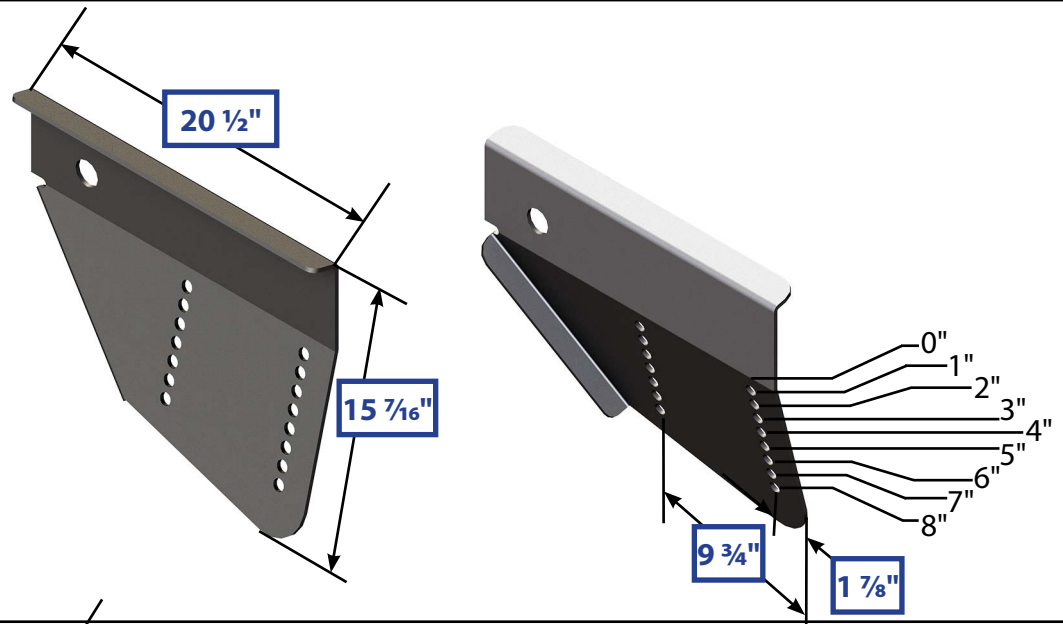

HD 1621
18K
113589/113590

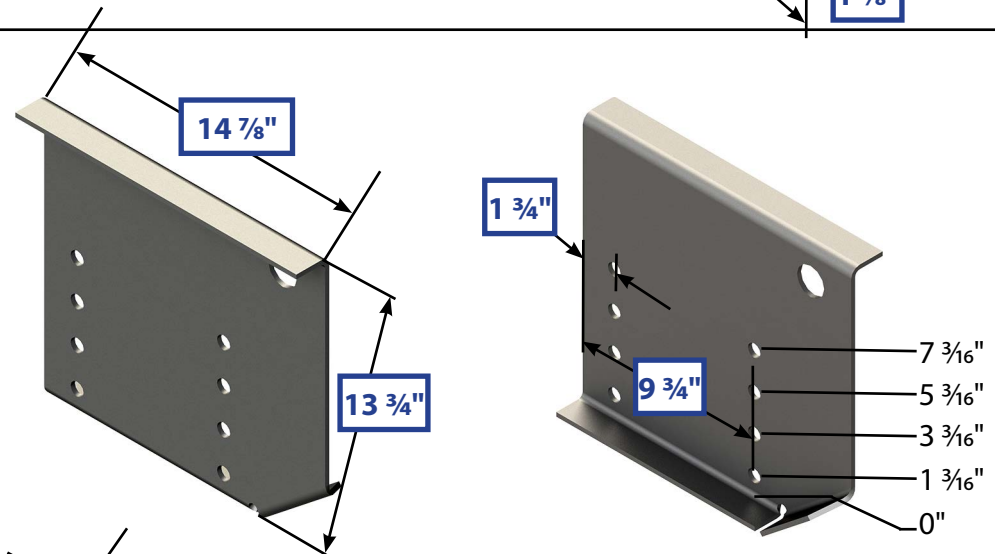

1716
1116
102964



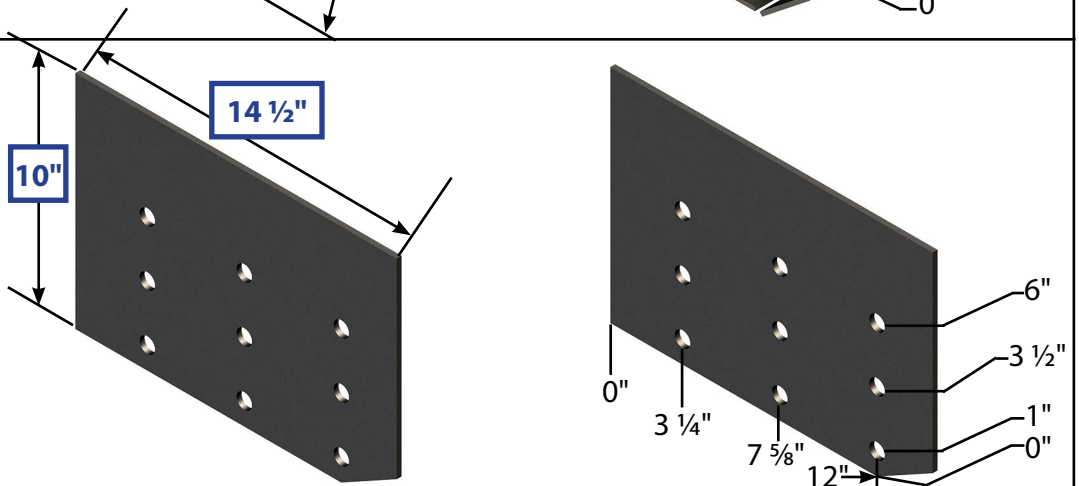




Pin Box Mounting Bolts Required per Side


Pin Box	GVWR	Side Plate	Bolts Required per Side	Component Image
1116	19K	119118 Extended 1270271 Retracted	6	119118 1270271
1621	15.5K	1191191 Extended (mounted 3rd hole down) 127026 Retracted (mounted 2nd hole down) 152551 Fully Retracted (mounted top holes) 257619 Fully Extended (mounted 4th hole down)	4	
	18K	301133 HD Retracted 3011331 HD Extended	5	301133 3011331
1621	15.5K	350082 Extended	4	
	18K	1191151 HD Extended	5	
1621	21K	1387883 SHD Retracted 1387881 SHD Extended	5	1387883 1387881










Pin Box Mounting Bolts Required per Side				
Pin Box	GVWR	Side Plate	Bolts Required per Side	Component Image
1621	21K	248136 SHD Extended 2481361 SHD Retracted	5	 
1716	15.5K	1191201 Extended 1324791 Retracted	6	 
1621 1716	18K	328330 1621 Rota-Flex	5	
		320734 1716 Rota-Flex	6	
	21K	328329 1621 Rota-Flex	5	
1621 M15	16K	171200 1621 LO5 T/A (OBSOLETE) Replaced by 158778	7	
	18K	155930 1621 LO5 T/A (OBSOLETE) Replaced by 158778	7	
	21K	158778 1621 Long Jaw LO5 T/A	7	
	21K	159430 1621 LO5 T/A (OBSOLETE) Replaced by 158778		



Pin Box Mounting Bolts Required per Side

Pin Box	GVWR	Side Plate	Bolts Required per Side	Component Image
1621 M15	23K	256761 M15 LO5 T/A	7	
1716	21K	158777 1716 Long Jaw LO7 T/A	9	
1621	18K	194170 1621 LO5 T/A Tri-Glide (OBSOLETE)	7	
	21K	277532 1621 LO5 T/A Tri-Glide (OBSOLETE)	7	
1716	21K	229669 1716 LO7 T/A Tri-Glide (OBSOLETE)	9	
	18K	328484 LO5 Medium Jaw T/A Flex-Air	7	
	18K	328492 LO5 Long Jaw T/A Flex-Air	7	
	10K	232275 Cequent Revolution	3	



Pin Box Mounting Bolts Required per Side				
Pin Box	GVWR	Side Plate	Bolts Required per Side	Component Image
1716	16K	434150 Cequent Revolution	4	
1621	15.5K	304513 Extended (Mounted in 3rd Hole Down) 304522 Extended (Mounted in Bottom Holes) 306513 Fully Retracted (Mounted in Top Holes)	4	
	18K	304514 HD Extended 304514 HD Retracted	5	 
	21K	304519 SHD Retracted 3045191 SHD Extended	5	 
1716	18K	304515 1716 Extended 304516 1716 Retracted	6	 
1116	18K	304521 1116 Extended - (OBSOLETE) 304517 1116 Retracted	6	 
Nar-Long	16K	304520 Narrow-Long	6	
Revolution	10K	361556 Revolution	2	



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.