




T.I.P. Troubleshooting Information on Power Gear

SOLENOID TORQUE SPECIFICATIONS

When installing cables and /or wires to the motorpump black plastic start solenoid (p/n 13-1087), the following cable mounting torque specs. should be followed to eliminate the possibility of fracturing the plastic body due to over tightening.

Torque specifications are as follows.

1. 40 in-lbs (3.3 ft-lbs) MAX! DO NOT EXCEED!
2. 95 in-lbs (7.9 ft-lbs) MAX! DO NOT EXCEED!

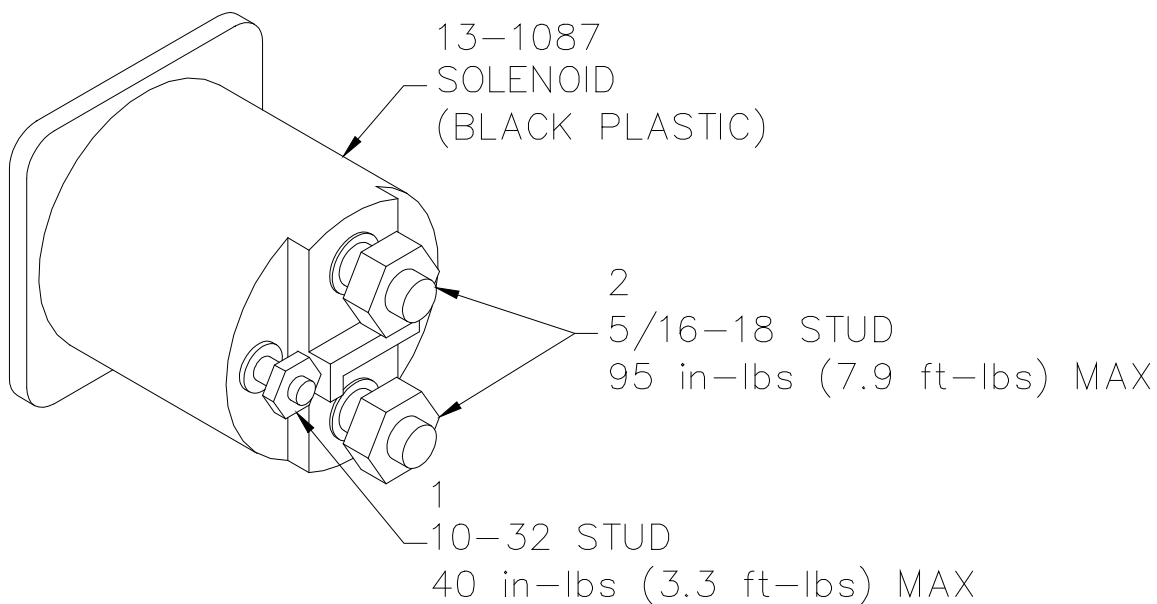



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.