



HAPPIJAC®

A Division of Lippert Components Inc.

Step 1: Remove these bolts (both sides) and lift out motor head.

Step 2: Remove these nuts (3) and remove jack from bracket.

Step 3: Remove these nuts (3) and remove swing out from camper.


Step 4: Turn jack 90 degrees and remount to motor head so that The head will lay along the front wall Of the camper.

Step 5: Remount the jack into the holes on the camper bracket where the swing out was removed.

Remove jack from here

Remount jack here from opposite side.

Remove

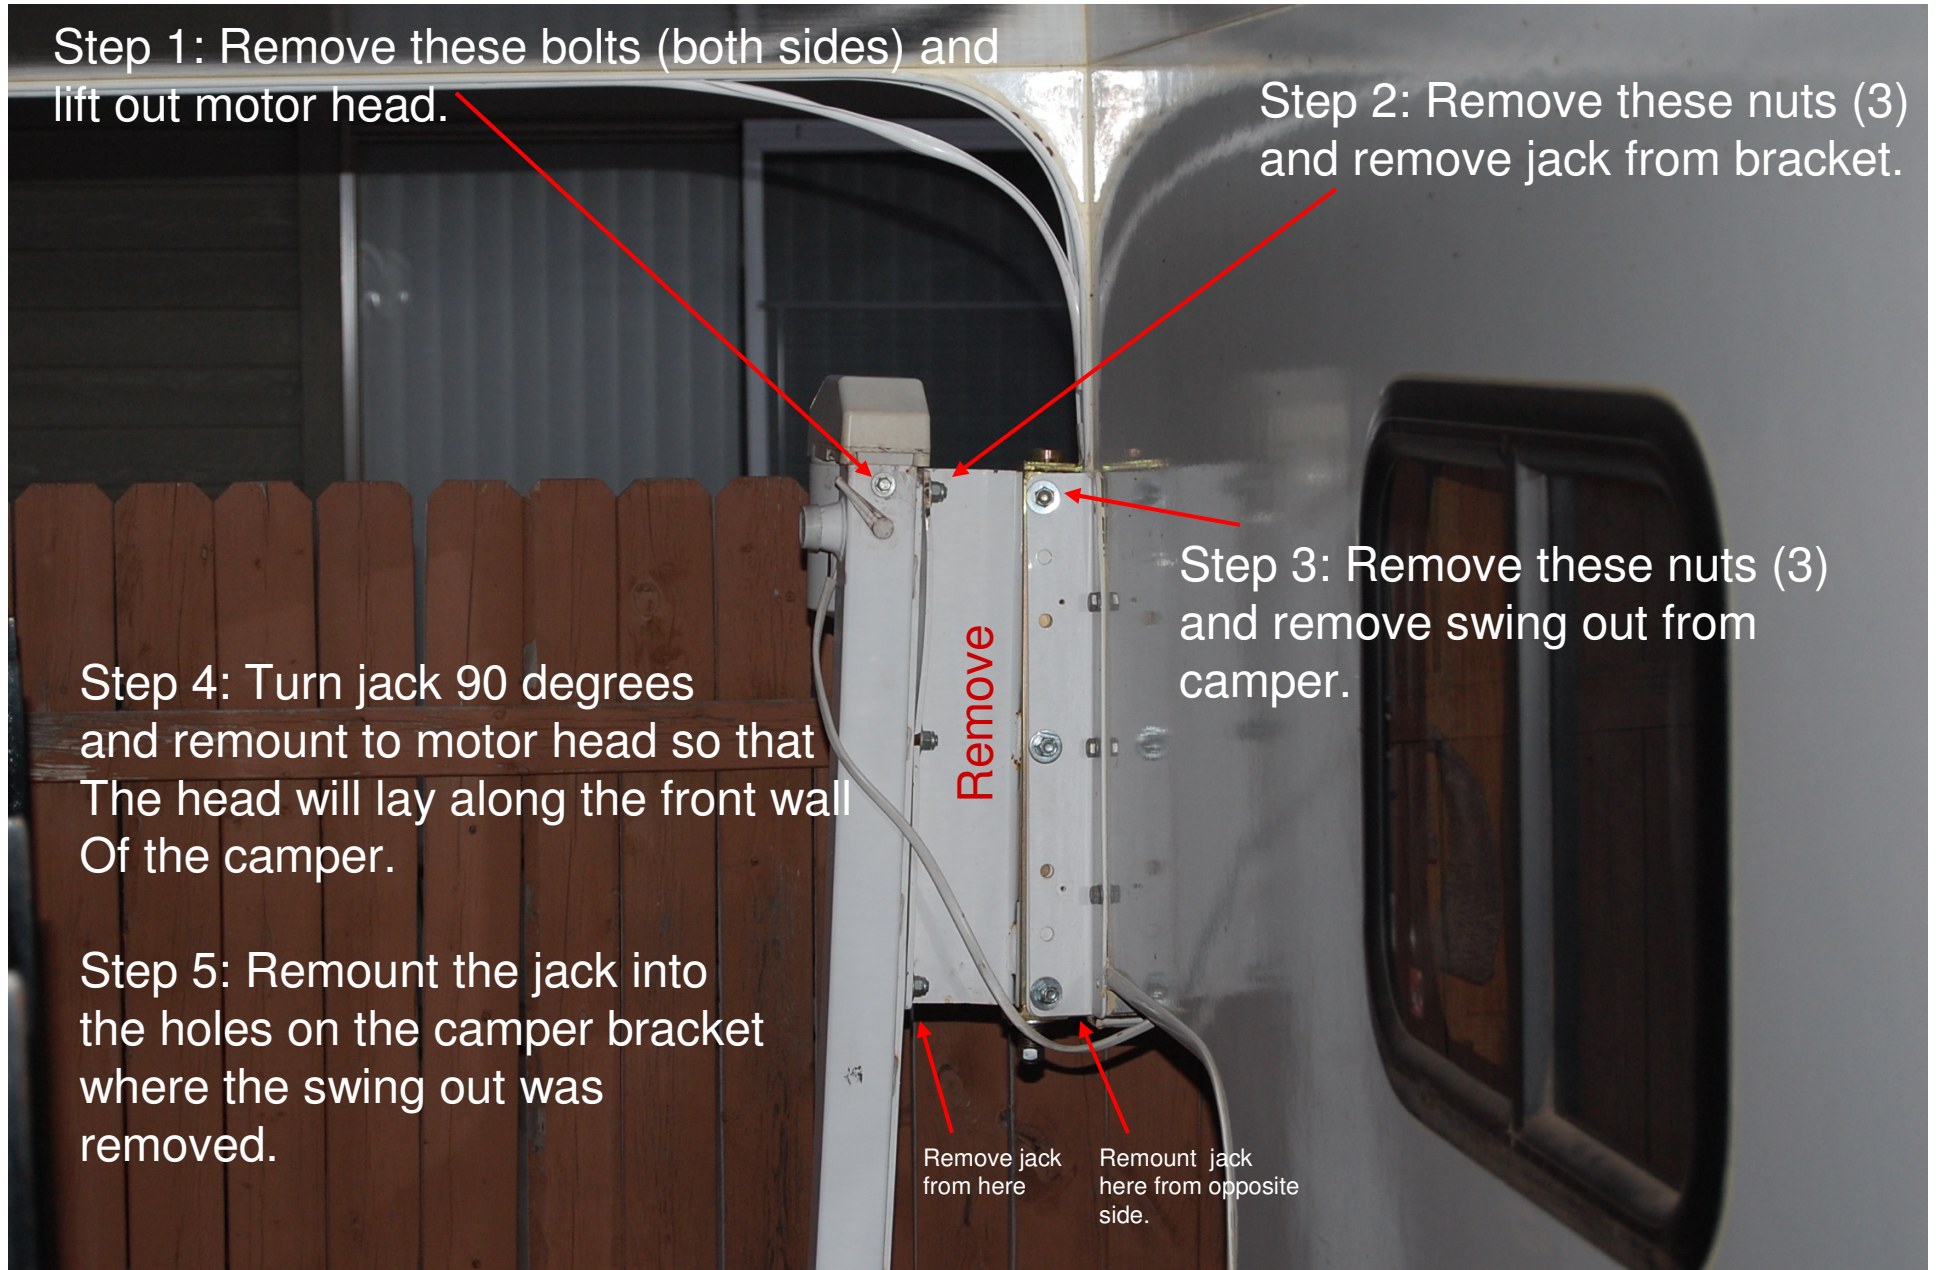



This manual is provided courtesy of RV Tech Cheat Sheet



Professional resources for the whole RV industry — *free.*

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

[Join our free Facebook group →](#)



Follow proper safety practices. If in doubt, consult a professional RV technician.