

WINDOWS

Purpose

This document outlines the appropriate way to conduct a water/rain test on Lippert windows.

Safety**⚠ CAUTION**

Do NOT use a pressure washer or a high-powered nozzle of any kind to do the water test. Using a pressure washer or high-powered nozzle could damage the window and cause water intrusion.

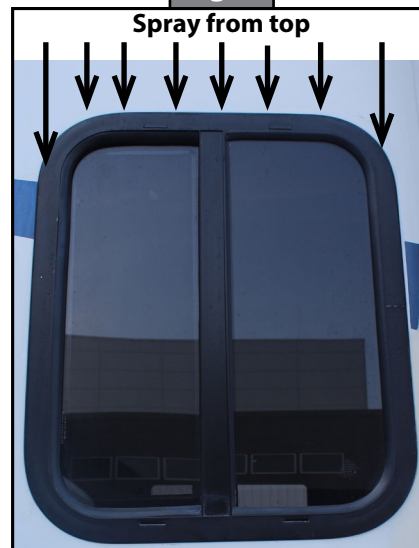
Resources Required

- Two people
- Garden hose with nozzle set to gentle shower or rain

Procedure

1. Make sure window is dry.
2. Have one person stand inside the unit to watch for any water intrusion.
3. Stand 5 to 10 feet away and spray the window from above with a nozzle (Fig. 1) set to gentle shower or rain so the water covers the entire window (Fig. 2).
4. Continue spraying the window for about two minutes.

NOTE: Water between the panes exiting the weep holes (Fig. 2A) is NOT a defect. Weep holes are designed for that purpose.

Fig. 1**Fig. 2**



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.