

WINDOWS

Purpose

This document outlines the correct procedure for closing all vented and egress windows that have crank or lever-style operators to avoid product damage during travel.

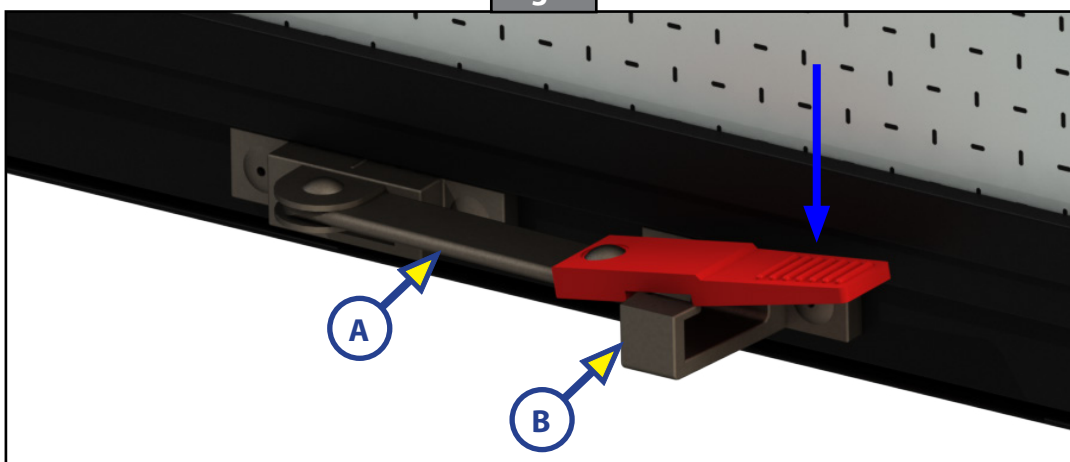
Procedure**⚠ WARNING**

All windows should be fully closed prior to towing or moving motorized RVs to prevent product damage.

Lever-Style Operators

1. Straighten the lever and pull the window completely shut.
2. Push the lever (Fig. 1A) towards the latch (Fig. 1B) and then push the end of the lever down and into the latch until the end of the lever is held down by the lip on the latch.

Fig. 1

Knob-Style Operators

1. Turn the knob (Fig. 2A) counterclockwise until the window is flush to the frame.
2. Continue to turn the knob until it will no longer turn.

Fig. 2



As a supplier of components to the RV industry, safety, education and customer satisfaction are our primary concerns. Should you have any questions, please do not hesitate to contact us at 432-LIPPERT (432-547-7378) or by email at customerservice@lci1.com. Self-help tips, technical documents, product videos and a training class schedule are available at lippert.com or by downloading the LippertNOW app.



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.